

BOSTON PUBLIC LIBRARY



3 9999 06373 359 4

No. \_\_\_\_\_



BUSINESS BRANCH

# Council Gets Building Code

## First Four Portions Of New Setup Ready

The first four parts of a 30-part new building code being drafted for Boston by an unpaid commission appointed three years ago were submitted by Mayor Tobin yesterday to the city council.

The commission, headed by Building Commr. James H. Mooney and including leading architects, building contractors, engineers and real estate men, submitted the first four sections of the proposed new code to the mayor late last week, and is expected to transmit the rest of its voluminous draft within the next few weeks. The council's special committee on building code soon will set a date for hearings on the measure, which, on adoption, will supersede existing Boston building laws passed by the Legislature.

The present laws, enacted in 1910 and given subsequent piecemeal additions by the Legislature, were termed grossly inadequate from the fire protection standpoint following the Coconut Grove fire.

"The proposed code," said the commission, "applies primarily to new construction. It applies to existing structures only as they are substantially altered, or as their type of occupancy changes, or as they are structurally unsound.

"The proposed code does not apply to fixtures, such as counters

New code passed by Council May 15, 1944



Desk

Building Com. says this  
contains complete code to date

5-6-42

The revised code has passed  
legislature but not City Council

5-6-42

This was finally passed by

Port. City Council May 1942

1942

THE BUILDING LAWS OF THE  
CITY OF BOSTON

THE CITY OF BOSTON  
OFFICE OF THE CITY ENGINEER  
100 STATE STREET  
BOSTON, MASSACHUSETTS



THE CITY OF BOSTON  
OFFICE OF THE CITY ENGINEER  
100 STATE STREET  
BOSTON, MASSACHUSETTS

# THE BUILDING LAW OF THE CITY OF BOSTON.

---

BEING ACTS OF 1907, CHAPTER 550, AS AMENDED,  
ALSO GENERAL AND SPECIAL ACTS RELATING  
TO BUILDINGS AND THEIR MAINTENANCE,  
USE AND OCCUPANCY.



B 1780

CITY OF BOSTON  
BUILDING DEPARTMENT  
Room 901, City Hall Annex

1929

Boston Public Library  
Boston Branch

CITY OF BOSTON.  
BUILDING DEPARTMENT.

---

[Revised to January 1, 1930.]



# THE BUILDING LAW OF THE CITY OF BOSTON.

---

CHAPTER 550, ACTS OF 1907 — AS AMENDED.  
AN ACT RELATIVE TO THE CONSTRUCTION, ALTERATION  
AND MAINTENANCE OF BUILDINGS IN THE CITY  
OF BOSTON.

*Be it enacted, etc., as follows:*

## SECTION 1.

There shall be in the city of Boston a department to be called the building department, which shall be under the charge of the building commissioner. The commissioner, who shall have had at least five years' experience as an architect, a builder, or a civil engineer, shall be appointed by the mayor, for a term of five years. He shall receive such salary as shall be fixed by the city council, with the approval of the mayor.

The present officers and employees of the building department, except the board of appeal, shall hold their several offices and positions until removed or discharged according to law.

The commissioner may, with the approval of the mayor, appoint such number of inspectors, employees, and assistants as the city council shall, from time to time, determine. No person shall be appointed as inspector of construction who has not had at least five years' experience as a builder, civil engineer, or architect, or as a superintendent or foreman or a competent mechanic in charge of construction.

## Sect. 1.]

The commissioner may appoint as his deputy an inspector in the department who shall, during the absence or disability of the commissioner, exercise all the powers of the commissioner. No officer or employee connected with the department shall be interested in the doing of work or the furnishing of material or appliances for the construction, alteration, or maintenance of any building, or in the making of plans or of specifications therefor, unless he is the owner thereof or a member of a board within the building department. No such officer or employee shall be engaged in any work which is inconsistent with his duties or with the interests of the department.

The clerk of the department shall, under the direction of the commissioner, keep a record of the business of the department, and the commissioner shall submit to the mayor a yearly report of such business. The records of the department shall be open to public inspection. The commissioner may require plans and specifications of any proposed structure or for the alteration of any structure or building to be filed with him, duplicates of which, when approved by the commissioner, shall be kept at the building during the progress of the work. Such duplicates shall be open to the inspection of any inspector in said department.

## PERMITS.

The commissioner shall grant permits for the construction, alteration, removal or tearing down of buildings or structures, and for plumbing, gas fitting, and the setting and maintenance of steam boilers and furnaces when applications for the same are made and filed in conformity with law. All permits issued by the commissioner shall be on printed forms approved by him. The commissioner shall issue rules and regulations governing the tearing down of buildings. Permits granted for building operations may be revoked by the commissioner if work is not

Sect. 1.]

commenced thereunder within six months from the date of the permit. Applications for permits for building operations upon which permits have not been granted within a period of six months from the date of the filing of the same shall become void.

#### WORK MAY BE STOPPED.

If the commissioner finds that work is being done without a permit or that the terms of a permit already granted are being violated he may, after notice mailed to the owner doing or causing the work to be done, order the whole or any part of such work stopped, and such work shall not be resumed until the commissioner has issued a permit or given his written approval for the continuance of such work.

#### FORMS FOR APPLICATIONS.

All applications for permits under the provisions of this act shall be in writing, on forms furnished by the department. The commissioner may require the material facts set forth in the same to be verified by the oath of the applicant; he may also require, in his discretion, a survey of a lot on which any proposed building is to be erected to be filed with the application. Every application shall state the name and address of the owner.

[1913, c. 704, sect. 1.]

[1923, c. 462, sect. 1.]

### SECTION 2.

#### RECORD OF VIOLATIONS.

The commissioner, or one of his inspectors, shall examine as often as is practicable every building in the course of construction or alteration, and shall make a record of all violations of this act and of all other matters relative thereto. The publication of such records with the consent of the commissioner shall be privileged.

## SECTION 3.

## RECORD OF UNSAFE BUILDINGS.

The commissioner, or one his inspectors, shall examine any building reported as dangerous or damaged, and shall make a record of such examination, stating the nature and estimated amount of the damage, and the purpose for which the building was used, and in case of fire the probable origin thereof; and shall examine all buildings in respect to which applications have been made for permits to raise, enlarge, alter, or repair, and shall make a record of every such examination.

## SECTION 4.

## PLACARDS.

The commissioner, or one of his inspectors, shall inspect every building or other structure or anything attached to or connected therewith which he has reason to believe is not provided with sufficient means of egress in case of fire satisfactory to the commissioner, exists in violation of any provision of this act or is unsafe or dangerous to life, limb, or adjoining buildings, and if he finds it not provided with sufficient means of egress in case of fire satisfactory to the commissioner, or to exist in violation of any provision of this act or unsafe or dangerous, he shall forthwith order sufficient means of egress to be provided or that the provisions of this act be complied with. Such order shall be served on the owner or agent or any person having an interest in such building, or on the administrator, executor or trustee of such owner, by leaving an attested copy thereof in hand or at his last and usual place of abode, if known, otherwise by posting an attested copy of such order in a conspicuous place upon the external walls of such building. The commissioner may affix to any such building by posting in a conspicuous place upon its external

Sect. 4.]

walls a notice of its dangerous condition or of its condition as a fire-trap or of its being a common nuisance within the provisions of this act. The notice shall not be removed or defaced without his consent.

#### BUILDINGS VACATED.

The commissioner may with the written approval of the mayor order any building which in his opinion is unsafe, not provided with sufficient means of egress in case of fire or exists in violation of any provision of this act, to be vacated forthwith.

[1914, c. 205, sect. 1.]

[1919, c. 155, sect. 1, Special Act.]

[1923, c. 462, sect. 2.]

### SECTION 5.

#### COMMISSIONER MAY SECURE BUILDINGS.

The person notified as provided in the preceding section shall provide sufficient means of egress in case of fire satisfactory to the building commissioner, or shall comply with the provision of this act which is being violated, or shall secure or remove said building, structure, attachment or connection forthwith. If the public safety so requires, the commissioner, with the approval of the mayor, may at once enter the building or other structure which he finds unsafe or dangerous, the land on which it stands or the abutting land or buildings, with such assistance as he may require, and secure or remove the same, and may erect such protection for the public by proper fence or otherwise as may be necessary, and for this purpose may close a public highway. The expense incurred thereby may be recovered of the owner thereof in an action in contract.

Before beginning the removal of any building or other structure, the building commissioner shall give notice by mail to the owner of his right to the material upon

Sect. 5.]

request. If the owner claims the material, he shall at once so notify the commissioner in writing and shall remove the same within ten days after the building or structure is taken down, and if he fails to do so the building commissioner may dispose of the material.

[1914, c. 205, sect. 2.]

[1919, c. 155, sect. 2, Special Act.]

[1920, c. 91, sect. 1.]

[1923, c. 462, sect. 3.]

## SECTION 6.

### BOARD OF APPEAL.

There shall be in said department a board to be called the board of appeal. Said board shall consist of five members appointed by the mayor in the following manner: One member from two candidates, one to be nominated by the Real Estate Exchange and Auction Board and one by the Massachusetts Real Estate Exchange; one member from two candidates, one to be nominated by the Boston Society of Architects and one by the Boston Society of Civil Engineers; one member from two candidates, one to be nominated by the Master Builders Association and one by the Contractors and Builders Association; one member from two candidates to be nominated by the Building Trades Council of the Boston Central Labor Union; and one member selected by the mayor. These appointments shall be subject to confirmation by the board of aldermen. The appointments first made shall be for the terms of one, two, three, four, and five years, respectively, so that the term of one member shall expire each year. All subsequent appointments shall be for the term of five years. Vacancies shall be filled in the same manner in which original appointments are made. Each member of said board shall be paid ten dollars per day for actual service but not more than one thousand dollars in

Sect. 6.]

any one year. No member shall act in any case in which he is interested, and in case any member is so disqualified, or is absent from illness or other cause, the remaining members shall designate a substitute.

[1910, c. 631, sect. 1.]

All the members of said board shall be residents of or engaged in business in Boston.

Every decision of the board shall be in writing and shall require the assent of at least three members.

## SECTION 7.

### APPEALS.

An applicant for a permit whose application has been refused may appeal therefrom within *ninety* days. A person who has been ordered by the commissioner to incur any expense may within *thirty* days after being notified of such order appeal therefrom by giving to the commissioner notice in writing of his appeal. Such notice or a certified copy thereof shall at once be transmitted by the commissioner to the board of appeal. After notice given to such parties as the board shall order, a hearing shall be had, and the board shall affirm, annul, or modify said refusal or order. The board may vary the provisions of this act in specific cases which appear to them not to have been contemplated by this act although covered by it, or in cases where manifest injustice is done, provided that the decision of the board in such a case shall be unanimous and shall not conflict with the spirit of any provision of this act.

The decision shall specify the variations allowed and the reasons therefor, and shall be filed in the office of the commissioner within *ten* days after the hearing. A certified copy shall be sent by mail or otherwise to the applicant and a copy kept publicly posted in the office of the

Sect. 7.]

commissioner for two weeks thereafter. If the order or refusal of the commissioner is affirmed, such order or refusal shall have full force and effect. If the order or refusal is modified or annulled, the commissioner shall issue a permit in accordance with such decision.

The provisions of this section shall also apply to any similar action or order of the commissioner of wires, under the provisions of chapter two hundred and sixty-eight of the acts of the year eighteen hundred and ninety-eight, or of any amendment thereof or addition thereto, except that in respect thereto the words "commissioner of wires" shall be substituted for the word "commissioner."

Any applicant to the building commissioner for a permit who appeals to the said board shall pay to him a fee of ten dollars before such permit shall be considered by the board. Such fees shall be deposited by the building commissioner with the city collector at least once in each week. The building commissioner may in his discretion refer without fee to the said board for its decision such cases as in his opinion justice requires.

[1920, c. 440, sect. 3.]

[1923, c. 108.]

## SECTION 8.

### PERMITS — TESTS.

*Permits.*— Before a permit is granted to erect any building except temporary buildings or buildings of minor importance, the commissioner may demand such further drawings, strain sheets, and description as will clearly show the entire construction, assumptions, calculations of stresses and all other structural details. Such details shall be in the form required by the commissioner, and calculation sheets shall be signed by the architect, engineer, contractor or other person responsible for them.



Sect. 8.]

a.—The commissioner shall not delay the issuance of a building permit if the plans submitted conform to the laws as to egress, class of construction and general arrangements, provided that the plans are accompanied by drawings showing the structural design and by a statement that the plans and designs conform to all the requirements of the law as to strength, stresses, strains, loads and stability and are signed and sworn to by the architect or engineer who made the calculations. The commissioner may examine, or cause to be examined, the structural design submitted, and may require such changes in size or material as may be necessary to comply fully with the requirements of this act.

b.—Permits for general repairs, for minor alterations not involving extensive structural changes, and for small buildings of the second or third class, may be issued upon presentation of the application on a special blank for the purpose.

*Systems not Covered by this Act.*—If an applicant for a permit to build desires to use as a substitute for the materials or methods covered by this act materials or methods of construction or maintenance not covered by it, he shall present to the commissioner plans, formulas, and such other information, and shall make such tests or present satisfactory evidence of such tests, as the commissioner may require. Such systems shall not be used until after the commissioner has issued general regulations fixing the methods to be followed, but no such regulation shall have the effect of altering the working stresses for any material herein mentioned or of reducing the fire-proofing requirements of this act.

It shall be the duty of the board of appeal to submit to the mayor on or before the first day of February in each year a report giving a summary of all decisions of the board, together with such recommendations for revision

Sect. 8.]

of the law as the board may deem advisable. The commissioner shall cause the report to be printed as a separate document for public distribution.

Any requirement necessary for the strength or stability of any existing or proposed structure or for the safety of the occupants thereof, not specifically covered by this act, shall be determined by the commissioner, subject to appeal.

*Testing.*— The commissioner may order loading tests to be made, at the expense of the owner, on any structure or part thereof, at such time and in such manner as will satisfactorily demonstrate to him that the unit stresses in any materials do not exceed those permitted under this act. Concrete construction shall be capable of bearing a live and dead load equivalent to twice that for which it was designed without causing permanent deformation.

No such test on the structure shall be required, however, until notice thereof in writing has been given by the commissioner to the person to whom the building permit was issued.

*Load Test.*— When the strength of any floor construction cannot be determined by the methods prescribed in this section or by the application of accepted engineering formulas, the safe uniformly distributed carrying capacity shall be taken as one sixth of the total load causing failure to a full-sized construction with the load applied at two points, each at one third of the span from the ends of the span.

*Fire Tests.*— In testing the fireproof qualities of any floor construction, at least one panel of the proposed maximum span, carrying a live load of at least one hundred and fifty pounds per square foot, shall be subjected to a fire continuously for four hours at an average temperature of seventeen hundred degrees Fahrenheit, followed by an application for at least ten minutes of a hose stream from a one and one eighth inch nozzle at sixty pound nozzle

Sect. 8.]

pressure, without appreciable deterioration or the passage of flame through the floor during the test.

[1918, c. 179, sect. 1, Special Act.]

[1920, c. 266, sect. 1.]

[1923, c. 462, sect. 4.]

## SECTION 9.

### BUILDINGS ALLOWED IN BUILDING LIMITS.

The building limits of the city of Boston as they now exist shall continue until changed by ordinance, and the city council may by ordinance from time to time extend and define them, and may establish other limits in any part of the city within which every building built after the establishment thereof shall be of the first or second class. This restriction shall not apply to wharves, nor to buildings not exceeding twenty-seven feet in height on wharves, nor to elevators for the storage of coal or grain, if the external parts of such buildings, elevators, or other structures are covered with slate, tile, metal, or other equally fireproof material, and the mode of construction and the location thereof are approved by the commissioner. Temporary structure to facilitate the prosecution of any authorized work may be erected under such conditions as the commissioner may prescribe and only such structures are allowed. All temporary buildings shall be immediately removed on the completion of this authorized work. Single and two-family dwellings not to be occupied and not intended, arranged, or designed to be occupied, by more than two families, may be built of third-class construction or of composite construction in all parts of the city of Boston not included in the building limits of the city as they existed prior to the twenty-second day of September in the year nineteen hundred and thirteen; but no such building shall occupy more than sixty per cent of the area of the lot upon which it is situated, and all such buildings shall be constructed with pitched roofs not less than thirty degrees from the horizontal.

Sect. 9.]

## THIRD CLASS BUILDINGS.

Buildings of the third class in the city of Boston may be reconstructed, altered, enlarged, repaired and extended so as to cover a greater area of land: *provided*, that the reconstruction, alteration, enlargement, or extension conforms to the requirements of the law in respect to new buildings of like character; and, *provided, also*, that not more than sixty per cent of the lot is covered.

For a period of three years after April first, nineteen hundred and twenty-two, any single or two-family dwelling of third-class construction situated in any part of said city not included within the building limits of said city, as they existed prior to said twenty-second day of September, may be converted by such changes, alterations or additions as may be necessary, into dwellings for the occupation of not more than three families; provided, that such changes, alterations or additions are otherwise in conformity with the building laws of said city at the time thereof.

[1914, c. 782, sect. 1.]

[1915, c. 352, sect. 1, Special Act.]

[1917, c. 221, Special Act.]

[1918, c. 179, sect. 2, Special Act.]

[1922, c. 126.]

[1924, c. 335, sect. 1.]

## SECTION 10.

## EXEMPTIONS FROM ACT.

The provisions of this act shall not apply to public highway and railway bridges, quays, or wharves, nor to buildings belonging to and occupied by the United States, the commonwealth, Suffolk county, nor to railroad stations, nor to portable or permanent school buildings erected and maintained by the schoolhouse department except as provided in section seventeen of this act and

Sect. 10.]

amendments thereof or additions thereto nor to voting booths erected and maintained by the board of election commissioners.

Except as otherwise provided by law, the provisions of this act shall not be held to deprive the board of health, the police commissioner, the board of street commissioners, the board of park commissioners, the board of examiners of gas fitters, the commissioner of wires, or the fire commissioner of the city of Boston of any power or authority which they have at the date of the passage of this act, or of the remedies for the enforcement of the orders of said boards or officers; unless such powers, authorities, or remedies are inconsistent with the provisions of this act; nor to repeal any existing law, not herein expressly repealed, except so far as it may be inconsistent with the provisions of this act.

[1915, c. 352, sect. 2, Special Act.]

[1921, c. 60, sect. 1.]

[1923, c. 462, sect. 5.]

## SECTION 11.

### DEFINITIONS.

In this act the following terms shall have the meanings respectively assigned to them as follows:

*First Class Building.*—A first class building shall consist of fireproof material throughout, with floors and roofs constructed of iron, steel or reinforced concrete beams, filled in between with terra cotta or other masonry arches or with concrete or reinforced concrete slabs; wood may be used only for under and upper floors, windows and door frames, sashes, doors, interior finish, hand rails for stairs; necessary sleepers bedded in concrete, and for isolated furrings bedded in mortar. There shall be no air space between the top of any floor arches and the floor boarding.

Sect. 11.]

*Second Class Building.*— All buildings not of the first class, the external and party walls of which are of brick, stone, iron, steel, concrete, reinforced concrete, concrete blocks, or other equally substantial and fireproof material.

*Third Class Building.*— A wooden frame building.

*Composite Building.*— A building partly of second class and partly of third class construction. Composite buildings may be built under the same restrictions as, and need comply only with the requirements for, third class buildings as to fire protection and exterior finish.

*Masonry.*— Masonry shall include such parts of a structure as are constructed with stone, bricks of burnt clay, cement, or sand lime, hollow blocks of burnt clay or concrete, and stone or cinder concrete, both plain and reinforced work.

*Foundation.*— That part of a wall below the level of the street curb, or, if a wall is not on the street, that part of the wall below the level of the highest ground next to the wall, or, in the discretion of the commissioner, that part of a party or partition wall below the cellar floor.

*Underpinning.*— In third class buildings the wall reaching from the foundation proper to the under side of the sills.

*Height of a Building.*— The vertical distance of the highest point of the roof above the mean grade of the curbs of all the streets upon which it abuts, and if it does not abut on a street, above the mean grade of the ground adjoining the building.

*Party Wall.*— A wall that separates two or more buildings, and is used or adapted for the use of more than one building.

*Partition Wall.*— An interior wall of masonry in a building.

*Thickness of Wall.*— The minimum thickness of such wall.

Sect. 11.]

*Story of a Building.*— That part of a building between the top of any floor level and the top of the floor or roof level next above.

*Basement.*— That part of a building not more than forty per cent nor less than thirty-five per cent of which is below the mean grade of the curb of the principal street upon which the building abuts, or if it does not abut upon a street, then below the mean grade of the land adjoining the building. When the building abuts on two or more streets the commissioner shall determine which is the principal street.

*Cellar.*— When there is a basement, that part or parts of a building below the basement. When there is no basement, that part of a building more than forty per cent of which is below the mean grade of the curb of the principal street upon which the building abuts, or if it does not abut upon a street then more than forty per cent below the mean grade of the land adjoining the building. When the building abuts on two or more streets the commissioner shall determine which is the principal street.

*Gas Fitting.*— The work of putting together any fittings, pipes or fixtures or other appliances which are to contain gas for heat, light or power purposes and will be subject to inspection under existing laws.

*The Number of Stories of a Building.*— The number of stories of a building shall be the greatest number of stories which a building is in height above the curb of the street of lowest grade upon which the building abuts or if it does not abut on a street, above the lowest grade of ground adjoining the building.

*First Story of a Building.*— The first story of a building is the first story more than sixty-five per cent of the height of which is above the mean grade of the curb of the principal street upon which the building abuts or if it does not abut upon a street, the first story of a building, more than

Sect. 11.]

sixty-five per cent of the height of which is above the mean grade of the land adjoining the building. Where there is a basement, that story next above the basement shall be the first story of a building. Where there is a cellar and no basement that story next above the cellar shall be the first story of a building. When the building abuts on two or more streets the commissioner shall determine which is the principal street.

[1918, c. 179, sect. 3, Special Act.]

[1923, c. 462, sect. 6.]

## SECTION 12.

### REQUIREMENTS FOR ALL BUILDINGS.

#### *Permits.*

No building, structure or foundation shall be constructed or altered without a permit, and such work shall be done in accordance with drawings bearing the approval of the commissioner.

#### *Excavations to be Supported.*

Every structure in process of construction, alteration, repair or removal, and every neighboring structure or portion thereof affected by such process or by any excavation, shall be sufficiently supported during such process.

The commissioner may take such measures as the public safety requires to carry these provisions into effect.

#### *Chimneys — Height Above Roof.*

Every chimney flue shall be carried to a height sufficient to protect adjoining buildings from fire and smoke, and unless the roof is covered with incombustible material shall extend at least four feet above the highest point of contact with the roof.

#### *Egress to Roof.*

Every permanent building more than twenty feet high having a flat roof shall have permanent means of access



Sect. 12.]

to the roof from the inside by an opening not less than two feet by three feet, with a fixed stepladder.

#### *Egress Required.*

Every building shall have, with reference to its height, condition, construction, surroundings, character of occupation and number of occupants, reasonable means of egress in case of fire, satisfactory to the commissioner except that in all factories or workshops hereafter built or altered, of second class construction, where ten or more persons are employed above the second floor, one exit shall consist of a fireproof stairway enclosed in incombustible material. No building hereafter erected shall be occupied or permitted to be occupied until said means of egress have been provided in accordance with plans and drawings approved by the building commissioner.

Water pipes in every building shall be properly protected from frost.

#### *Chimney, Walls and Lining of.*

All chimneys of masonry construction shall have walls at least eight inches thick, or be constructed of four-inch brick walls with a suitable flue lining. Steel stacks shall be permissible under such conditions as the commissioner shall prescribe.

#### *Water-Closets.*

Every building used for habitation shall have such number of water-closets as the board of health may require; every building where persons are employed shall have at least one water-closet for every twenty persons therein employed, and in any building where both sexes are employed, separate accommodations shall be furnished for men and women. Every enclosure containing one or more water-closets shall be provided with adequate ventilation to the outer air either by window or by suitable light shaft.

Sect. 12.]

*Outside Finish.*

In every first and second class building or when the entire building could be built of third class construction, all of the outside finish shall be of incombustible materials, except window and door frames, and finish about show windows. Where store fronts are carried up more than one story the columns and lintels shall be of, or finished with, incombustible materials; but in no case shall store fronts be carried more than two stories, unless the same are constructed and finished throughout with fireproof material, except window and door frames.

Every ventilating flue shall be constructed of, or lined with, incombustible material.

*Floor Ties.*

Every floor in second class buildings shall have its beams tied to the walls and to each other with wrought-iron straps or anchors at least three eighths of an inch thick by one and one half inches wide and not less than eighteen inches long, so as to form continuous ties across the building not more than ten feet apart. Walls running parallel, or nearly parallel, with floor beams shall be properly tied once in ten feet to the floor beams by iron straps or anchors of the size above specified.

*Wooden Headers and Trimmers.*

Every wooden header or trimmer more than four feet long, carrying a floor load of over seventy pounds per square foot, shall, at connections with other beams, be framed or hung in stirrup irons, and joint-bolted. All tail beams and similar beams of wood shall be framed or hung in stirrup irons.

*Windows on Fire Escapes. Kitchenettes. Sprinklers.*

All walls, piers and columns acting as supports below the first floor of all buildings hereafter built shall be of

Sect. 12.]

masonry or metal, except that in one or two family frame dwellings the exterior walls of basement or cellar stories may be constructed of wood providing the sills are not more than two feet above the surrounding ground. In all buildings hereafter erected, where outside means of egress are to be constructed, the building commissioner may order, when he deems it necessary, all the window openings in the same to be protected by metal frames and sash and wire glass, and all doors leading to such outside means of egress and the frames of the same to be of metal or metal covered. If doors are glazed, they shall be glazed with wire glass. Every kitchen, kitchenette or room used or adapted to be used for cooking purposes, either by coal, electric, gas or oil stoves, in every building hereafter erected, remodelled or enlarged, shall be not less than six feet in the least dimension, and have a floor area of not less than forty-eight square feet. Every such kitchen, kitchenette or room to be used or adapted to be used for cooking purposes shall be lighted and ventilated by window openings in an external wall direct to the open air, or if such kitchen, kitchenette or room is of not more than seventy square feet in area upon a vent shaft, as defined in section forty-two, with no opening from any toilet room into said vent shaft, and such window openings shall equal in size in the aggregate at least one eighth of the area of the floor of such room. When gas, coal or oil stove ovens, broilers or water heaters are connected to a ventilating flue, the flue shall be constructed of brick walls not less than eight inches thick, or with walls four inches thick lined with terra-cotta flue lining at least one inch thick. The building commissioner may order the basements of any mercantile building hereafter erected to be provided with a system of automatic sprinklers, approved by him as to location, arrangement and efficiency, when not otherwise so required by law. Any alteration shall

Sect. 12.]

conform to the requirements of this act for new buildings only to the extent of the alteration made. Whenever any building is subdivided into stores in the first story and storage space is provided for such stores in the basement, then such storage space shall be enclosed with partitions made of incombustible material satisfactory to the commissioner.

1912]

[1912, c. 369, sect. 1.]

[1914, c. 782, sect. 2.]

[1921, c. 289, sect. 1.]

[1923, c. 462, sect. 7.]

[1924, c. 335, sect. 2.]

## SECTION 13.

### PROHIBITIONS.

#### *Wooden Buildings in Building Limits.*

No alteration or repair of a wooden building within the building limits shall be made without a permit from the commissioner, and no permit to increase the height or ground area of such a building shall be granted, nor shall a permit for alterations or repairs be granted if the estimated cost of the proposed alterations or repairs exceeds one half of the fair value of the building at the time of the proposed alteration or repair, nor shall the total cost of all alterations or repairs hereafter made exceed one half the fair valuation of the building at the time of the proposed alteration or repair.

No wooden building, within or without the building limits, shall be moved to any position within the building limits. Nothing in this section shall be deemed to prohibit the moving of wooden buildings within the building limits if the permits for moving have been granted by the building commissioner prior to June first, nineteen hundred and twenty-three.

Sect. 13.

*Recess in Wall.*

No recess or chase shall be made in any external or party wall so as to leave the thickness at the back less than eight inches.

*Timbers in Party Wall.*

No roof or floor timber entering a party wall shall have less than four inches of solid brickwork between it and the end of any other timber.

No part of any roof shall be constructed in such a manner as to discharge snow, ice, or other material upon a public street or alley.

*Observation Stands.*

No elevated staging or stand for observation purposes shall be constructed or occupied upon the roof of any building.

*Chimneys.*

No chimney shall be corbelled from a wall more than the thickness of the wall.

No chimney shall be hung from a wall which is less than twelve inches thick.

No masonry shall rest upon wood, except wooden piles and mud sills and wooden floors carrying tile or concrete for finish or bricknogging in wood stud partitions.

No part of any floor timber shall be within two inches of any chimney.

No studding or furring shall be within one inch of any chimney.

*Boilers — Furnaces.*

No furnace or boiler for heating shall be placed upon a wooden floor unless the floor is made safe with fire resisting material satisfactory to the building commissioner.

Sect. 13.]

No smoke pipe shall project through any external wall or window.

No steam, furnace, or other hot air pipes shall be carried within one inch of any wood work unless such pipes are double or otherwise protected by incombustible material. No combustible partition shall be within four feet of the sides and back or within six feet of the front of any boiler, carrying a pressure of over ten pounds, unless the partition is covered with incombustible material which extends to the full height of the partition from the end or back of the boiler to at least five feet in front of it. In such case the distance shall be not less than two feet from all the sides and five feet from the front of the boiler, and all lath and plaster and wooden ceiling beams over the boiler and to a distance of not less than four feet in front of all such boilers shall be covered with incombustible material.

#### *Observation Stand.*

No observation stand shall be constructed or maintained except in accordance with plans approved by the commissioner.

#### *Closet Under Stairs.*

No closet of any kind shall be constructed or maintained under any staircase leading from the cellar or basement to the first story.

#### *Boiler Under Public Way.*

No boiler shall be placed or maintained under any public way.

#### *Projections.*

No part of any structure, except cornices, permanent awnings, string courses, window caps and sills, bay windows, under such terms, conditions, regulations and re-

Sect. 13.]

strictions as may be required by the mayor and board of aldermen, and outside means of egress, as otherwise provided, and signs as provided in chapter three hundred and fifty-two of the acts of the year eighteen hundred and ninety-five, shall project over any public way or square. No cornice or bay window shall so project more than three feet; nor more than twelve inches over a way of a width of thirty feet or less.

#### *Stables.*

No building within forty feet of the property of any adjoining owner shall be erected for or converted to use as a stable, unless such use is authorized by the board of health after a public hearing. Written notice of such hearing shall be given to the adjoining owners, and published at least three times in at least two newspapers published in Boston, ten days at least before the hearing.

#### *Roofing Materials.*

No material other than brick, tile, slate, metal, asbestos shingles, or slag, shall hereafter be used to cover or roof any building, or the tops, sides and outsides of the frames of any dormer window or any other projection of the roof of any building, except wooden cornices on wooden frame buildings, provided, that if a dormer window is in excess of fifty per cent of the length of the roof on the side of the roof where the dormer window is to be located, the same covering as used on the external walls of the building may be used on the sides and outsides of the frames of the dormer window; but on flat roofs *composition of asbestos and asphalt* or tar and gravel may be used, or such other composition of fire-resisting roofing as the commissioner may authorize. Asphalt shingles may also be used: *provided*, that each package of shingles is inspected and labelled and that the shingles are made and laid in con-

Sect. 13.]

formity with the specifications promulgated by the Underwriters' Laboratories as modified from time to time by said Laboratories; and *provided, further*, that within the lines at present constituting the building limits of the city of Boston such asphalt shingles may be used only on buildings of third class construction, and that they shall not be used within the building limits of said city as they existed prior to September twenty-second, nineteen hundred and thirteen. Nothing in this section shall be construed to prohibit the use of materials approved by the commissioner for repairing any roof now covered with wooden shingles or to prohibit covering with such approved materials the roofs of buildings less than sixteen feet in height: *provided*, that the building is not altered in height or otherwise generally reconstructed.

*Lot Line — Distance from First and Second Class Buildings to be Kept.*

No part of any first or second class building hereafter erected, except the eaves and cornices, shall be nearer than five feet to the line of any adjoining lot on any side on which such building has any opening in the outer wall thereof unless all such openings are protected by wire glass set in metal frames and sash or approved metal covered frames and sash.

[1914, c. 782, sect. 3.]

[1915, c. 352, Special Act, sect. 3.]

[1916, c. 277, Special Act.]

[1918, c. 104, Special Act.]

[1923, c. 462, sect. 8.]

[1924, c. 335, sect. 3.]

## SECTION 14.

## QUALITY AND STRENGTH OF MATERIALS. METHODS OF COMPUTATION.

All materials shall be of such quality for the purposes for which they are to be used as to insure, in the judg-



Sect. 14.]

ment of the commissioner, ample safety and security to life, limb and neighboring property. The commissioner shall have power to reject all materials which in his judgment are unsuitable, and may require tests to be made by the architect, engineer, builder, owner or other interested persons. Any test thus required shall be made under the supervision or direction of the commissioner, and at the expense of the owner.

*Brick.*— Brick may be of hard-burned clay, sand lime or cement and, except for nogging, fire-stopping and nonbearing or curtain walls not exposed to the weather, shall be hard and strong, of quality approved as satisfactory by the commissioner. Second-hand bricks shall be thoroughly cleaned before being used.

Hard brick tested for approval shall develop an average ultimate compressive strength of three thousand pounds per square inch. Brick shall be tested flatwise (half bricks permitted) and the average shall be taken on at least five samples, none of which must fall below twenty-five hundred pounds per square inch. The compressive strength of wet brick after forty-eight hours in water must be at least two thirds that of dry brick, except that, when the lower strength is above three thousand pounds per square inch, the loss in strength may be ignored.

Before brick or other masonry materials are submitted to absorption tests, they shall be dried to practically constant weight at a temperature between two hundred and twenty-five and two hundred and fifty degrees Fahrenheit and shall not be fully immersed when placed in water.

*Terra Cotta Floor Tile.*— Terra cotta floor tile, when tested on end and faced with Portland cement, shall give an average compressive strength of not less than twenty-five hundred pounds per square inch of net area. The average strength shall be computed from the result of tests of ten average tiles.

Sect. 14.]

*Building Blocks.*— The term “block” as used in this section shall mean any shape of brick or tile which forms a hollow or cellular wall.

Concrete, hollow and two-piece building blocks shall be made of Portland cement and suitable aggregates in such proportion as to develop the following ultimate compressive strength at twenty-eight days, shall average one thousand pounds per square inch of gross sectional area of the block as used in the wall and shall not fall below seven hundred pounds per square inch in any test, when testing at least six ordinary samples. In case of hollow building blocks, the gross cross sectional area shall be considered as the product of the length by the width of the block. No allowance shall be made for air spaces of the block. The allowable working stress for such block shall not exceed one hundred pounds per gross square inch.

Terra cotta building blocks shall be whole, sound and hard burned and shall develop an ultimate crushing strength per square inch of gross area of not less than twelve hundred pounds when tested with the cells placed vertically, and three hundred pounds with the cells placed horizontally.

The allowable working stress for such blocks shall not exceed one hundred pounds and fifty pounds per gross square inch respectively.

The absorption of building blocks to be used for bearing or enclosing walls shall not exceed twelve per cent in forty-eight hours as an average, or more than fifteen per cent in any case.

*Concrete Aggregates.*— The fine aggregates shall be sand or crushed screenings passing a one fourth inch screen. The coarse aggregate shall consist of gravel, crushed stone, slag or cinders retained on a one fourth inch screen. Cinders or slag may be used for aggregate only for walls of one story buildings, for floor slabs, roof slabs, partitions, fireproofing, fire stopping and filling.

Sect. 14.]

*Sand.*— Sand or other fine aggregate for concrete shall be of such quality that mortar of one part Portland cement and three parts sand by weight shall show a tensile strength of not less than seventy per cent of the strength of mortar made on the same proportions with the same cement and standard Ottawa sand. If the tensile strength of such mortar is less than eighty per cent of that made with Ottawa sand, additional cement shall be used in such amount as may be required by the commissioner. The commissioner may require such tests when, in his judgment they are necessary.

*Stone.*— Stone for concrete shall be clean, hard and durable. For reinforced concrete it shall be of suitable size for the work and shall be small enough to allow the concrete to pass readily between and easily surround the reinforcement, and fill all parts of the forms.

*Gravel.*— Run-of-bank gravel shall be used only when and as approved by the commissioner.

*Cinders and Slag.*— Cinders shall be composed of hard, clean, vitreous clinkers, reasonably free from sulphides, unburned or partly burned coal and ashes. Slag shall be clean and hard. Cinders and slag shall be of suitable size for the work.

*Portland Cement.*— Portland cement shall conform to the Standard Specifications of the American Society for Testing Materials as from time to time revised.

*Lime.*— Lime shall be free from ashes, clinker and other foreign material and shall not be air slaked.

*Lime Mortar.*— Lime mortar shall be made of slaked lime or hydrated lime with proper proportion of sand.

*Cement-Lime Mortar.*— Cement-lime mortar shall be thoroughly mixed and made of one part Portland cement, not more than two parts slaked lime or hydrated lime and not more than eight parts of sand by volume, but mixtures with larger proportion of cement shall be allowed higher stress as hereinafter provided.

Sect. 14.]

*Portland Cement Mortar.*—Portland cement mortar shall be thoroughly mixed and made of one part Portland cement and not more than three parts of sand by volume. Lime putty, or hydrated lime, may be added to an amount equal to fifteen per cent of the volume of the cement.

*Concrete.*—Concrete shall mean an approved mixture of Portland cement, water and fine and coarse aggregate.

*Mixing.*—The ingredients shall be thoroughly mixed and the mixing shall continue until the cement is thoroughly distributed and the mass is uniform in color. For reinforced concrete the consistency shall be such that the concrete will entirely enclose the reinforcement, but shall not be so wet as to cause separation of the ingredients.

*Rubble Concrete.*—Rubble concrete shall mean an approved mixture of Portland cement, water, fine and coarse aggregate to which stones are added after depositing. When one-man stones are used to form rubble concrete, there shall be not less than three inches between the stones and the forms, and between edges of adjacent stones. When stones larger than one-man size are used to form rubble concrete there shall be not less than six inches between the stones and forms, and between edges of adjacent stones. Stones shall be clean and wet and shall be deposited in concrete already in place, before the latter has begun to set.

In piers no stone shall be larger than one quarter of the horizontal cross section of the pier. Rubble concrete shall not be used for any projecting footing.

*Joints.*—Joints formed between portions of concrete placed at different times shall be made in such a manner as not to weaken the completed structure. Whenever fresh concrete joins concrete which is set, or partly set, the surface of the old concrete shall be rough, clean and thoroughly wet.

*Use of Concrete.*—Concrete shall be used immediately after mixing, it shall not be placed in the work after it has

Sect. 14.]

begun to harden, and it shall be deposited in such manner and under such regulations as to secure a compact mass of the best quality for the proportions used. Forms shall remain until the concrete has hardened sufficiently to carry its load safely, and shall be removed without damage to the concrete.

*Inspection of Concrete.*— The commissioner may require an applicant for a permit for the structural use of concrete or other similar aggregate materials to have a competent inspector, satisfactory to the commissioner, at all times on the work while such materials are being mixed or deposited and such materials shall be mixed and deposited in a manner approved by the commissioner. The inspector shall make daily reports to the commissioner on the progress of the work.

*Steel.*— Steel for all structural work in buildings, except reinforced concrete work, shall conform to the requirements of the Standard Specifications for the composition of structural steel for bridges of the American Society for Testing Materials, as from time to time revised.

*Wrought Iron.*— Wrought iron for structural work in buildings shall conform to the requirements of the Standard Specifications for Wrought Iron Plates, Class B of the said society as from time to time revised.

*Cast Iron.*— Cast iron for all structural work in buildings shall conform to the requirements of the Standard Specifications for Medium Gray Iron Castings of the said society as from time to time revised.

*Cast Iron Columns.*— Cast iron columns shall not be used in the structural frames of buildings whose height exceeds two times the least width of base, nor in any building over one hundred feet high. Cast iron columns shall be faced at ends to a true surface perpendicular to the axis to give full bearing for the cross section of the column.

All hollow cast iron columns, except when open at both

Sect. 14.]

ends and without flanges, shall have two three eighths of an inch holes drilled on the top or bottom side of the column as cast, if the columns are cast on side one hole about twelve inches each side of the center of the length of the column, to exhibit thickness of the shell. Columns cast on end shall have two three eighths of an inch holes drilled, at an angle of ninety degrees to each other at the middle of the column, to exhibit thickness of shell. Additional holes shall be drilled when required by the commissioner.

*Cast Iron Bases and Lintels.*— Cast iron bases or shoes shall be planed on top. Bases which rest on structural steel members shall be planed top and bottom. The thickness of metal shall be not less than one inch. The inclination of the outer edge of the ribs with the horizontal shall be not less than forty-five degrees. Whenever a side of the bed plate exceeds three feet in length a reinforcing flange at least three inches high shall be provided along such edge of the plate.

Cast iron lintels shall be not less than three fourths of an inch in thickness and shall not be used for spans exceeding six feet.

*Timber.*— All timber for structural purposes shall conform to such specifications as may be promulgated by the commissioner but shall be free from defects such as injurious ring or round shakes, and through shakes that extend to the surface, from unsound and loose knots, and knots in groups that will materially impair the strength, rot, worm holes and defects caused by manufacture.

*Classes of Timber.*— “Dense” and “sound” classes of timber shall be as defined by the American Society for Testing Materials in their Standard Definitions of Terms relating to Structural Timbers, section three, as revised in nineteen hundred and fifteen.

Sect. 14.]

*Strength of Materials.*

*Piers.*— Any body of masonry less than four feet long in its greatest horizontal dimension shall be called a pier. The height of a pier between openings having a continuous wall above or below them shall be assumed equal to the height of the opening. The height of a pier or wall supporting floors or roofs shall be assumed as the distance from top of footing or floor to under side of floor or roof beams.

*Stresses.*— The stresses in materials used in the construction of all buildings, produced by their own weight and the loads hereinafter specified, shall not exceed the limits assigned in this section.

*Stresses for Brickwork.*

	Piers of Height not more than Six Times their Least Dimension, and Walls of Height not more than Nine Times their Least Dimension (Tons per Square Foot).	Piers of Height from Six to Twelve Times their Least Dimension, and Walls of Height from Nine to Twenty Times their Least Dimension (Tons per Square Foot).
<p>MORTAR.</p> <p>CEMENT TO BE PORTLAND. (PARTS MEASURED BY VOLUME.)</p>		
Cement mortar as specified in this section.....	20	18
2 parts cement, 1 part hydrated or slaked lime, 8 parts sand.....	16	14
1 part cement, 1 part hydrated or slaked lime, 6 parts sand.....	14	12
1 part cement, 2 parts hydrated or slaked lime, 8 parts sand.....	12	10
Lime mortar.....	8	6



Sect. 14.]

*Stresses for Concrete.*

<p>CEMENT TO BE PORTLAND. THE VOLUME OF GIVEN FOR AGGREGATE TO BE THE VOLUME OF FINE AND COARSE AGGREGATE MEASURED SEPARATELY BEFORE MIXING AND PROPORTIONED SO AS TO GIVE A DENSE MIXTURE.</p>	<p>Piers of Height not more than Six Times their Least Dimension, and for Walls of Height not more than Nine Times their Least Di- mension (Tons per Square Foot).</p>	<p>Walls of Height from Nine to Twenty Times their Least Di- mension (Tons per Square Foot).</p>
<p>1 part cement, 6 parts aggregate.....</p>	<p>32½</p>	<p>25</p>
<p>1 part cement, 7½ parts aggregate.....</p>	<p>26</p>	<p>21</p>
<p>1 part cement, 9 parts aggregate.....</p>	<p>21</p>	<p>17</p>

Sect. 14.]

No plain concrete bearing pier shall have a greater height unsupported laterally than six times, and no brick pier greater than twelve times, its least dimension. No brick or plain concrete bearing wall, unless it is properly braced by cross walls, piers or other means, shall have a greater height unsupported than twelve times its least dimension. When compression is applied to a portion of a surface of concrete of which the area is at least twice that to which the load is applied, a stress of fifty per cent in excess of those allowed by the above table may be used in bearing.

*Stresses for Grout and Stone Masonry.*

CEMENT TO BE PORTLAND. (PARTS MEASURED BY VOLUME.)	Tons per Square Foot.
Grout, 1 part cement, 1 part sand, when not less than two feet in least lateral dimension, not more than one half inch joints.	72
Granite masonry, with mortar of 1 part cement, 2 parts sand, not more than one half inch joints.	72
Granite masonry, cement mortar, not more than one half inch joints.	60
Limestone and marble masonry, cement mortar, not more than one half inch joints.	40
Sandstone masonry, cement mortar, not more than one half inch joints.	30

*Provided, however,* that in stone masonry columns or in piers of excessive height, the loads may be modified by the commissioner.

*Stresses for Cast Iron.*

Bearing . . . . .	16,000 lbs. per sq. inch.
Bending compression . . . . .	10,000 lbs. per sq. inch.
Bending tension . . . . .	4,000 lbs. per sq. inch.
Shearing . . . . .	2,000 lbs. per sq. inch.

Sect. 14.]

*Cast Iron Compression Members.*—Cast iron compression members shall not have a greater value of  $l-r$  than seventy nor a smaller outside diameter or side than six inches, nor a greater unsupported length than twenty-four times their least dimension or diameter: *provided, however,* that columns supporting roof loads only may have a value of  $l-r$  not greater than ninety-six and an unsupported length of not more than thirty times the least lateral dimension or diameter. They shall not have metal less than *three fourths* of an inch, nor thinner than *one twelfth* of the greatest lateral dimension or side. The stresses due to eccentric or transverse loading, combined with those due to central loading, shall not exceed nine thousand pounds per square inch.

Cast iron columns shall not be used where the loading is so eccentric as to cause tension, nor in garages, nor in places where they are likely to receive impact from vehicles.

Wherever the core of a column has shifted more than one quarter of the thickness of the shell, the strength shall be computed assuming the thickness of metal all around to be equal to the thinnest part.

For centrally loaded cast iron compression members the safe load in pounds per square inch shall be as follows:

*Working Stress.*

$l/r$	10.	20.	30.	40.	50.
Stress per square inch.....	8,600	8,200	7,800	7,400	7,000
$l/r$	60.	70.	80.	90.	96.
Stress per square inch.....	6,600	6,200	5,800	5,400	5,160

*Stresses of Timber.*

	STRESS PER SQUARE INCH FOR TIMBERS USED IN DRY PLACES.					
	Southern Yellow Pine, Dense Grade.	Southern Yellow Pine, Sound Grade.	Douglas Fir, Sound Grade.	Spruce.	White Pine.	Oak (White).
Bearing across grain.....	350	250	200	200	200	500
Bearing with grain.....	1,200	900	1,000	750	700	900
Bending.....	1,600	1,200	1,100	1,000	1,000	1,400
Shear with grain.....	150	100	100	100	80	200

*Timber Compression Members.*— Timber compression members shall not be used of a greater unstayed length than thirty times their least dimension for isolated columns or forty times their least dimension for columns in partitions or truss members. The stresses due to eccentric or tranverse loading combined with those due to central loading shall not exceed the maximum stress allowed in the table below.

For centrally loaded timber compression members the safe load per square inch shall be as follows:—

LENGTH DIVIDED BY LEAST DIMENSIONS.	Southern Yellow Pine, Dense Grade.	Southern Yellow Pine, Sound Grade.	Douglas Fir, Dense Grade.	Spruce.	White Pine.	Oak (White).
10 or less.....	1,000	750	840	620	585	750
15.....	900	675	750	560	525	675
20.....	800	600	660	500	465	600
25.....	700	525	580	440	405	525
30.....	600	450	500	380	350	450
35.....	500	375	420	320	290	375
40.....	400	300	330	250	230	300

Sect. 14.]

*Other Materials.*—Stresses for materials and forms of material, not herein mentioned, shall be determined by the commissioner.

*Wind Bracing.*—Provisions for wind bracing shall be made where it is necessary in good practice or as determined by the commissioner.

*Cutting.*—No cutting for piping or any other purpose shall be done which would reduce the strength of any part of the structure below what is required by the provisions of this act.

*Methods of Computation.*—Methods for reinforced concrete are given in section fifteen. For all other materials, the following methods shall be used:—

The span of beams, girders, or trusses shall be taken as the distance from centre to centre of the bearings. If connected to the side of a column, the span shall be taken to the centre of the column.

[1918, c. 179, sect. 4, Special Act.]

[1923, c. 462, sect. 9.]

[1924, c. 412, sect. 1.]

## SECTION 15.

### REINFORCED CONCRETE.

*Definition.*—Reinforced concrete shall mean an approved mixture of Portland cement, water and fine and coarse aggregate, reinforced by steel.

*Portland Cement and Aggregate.*—The Portland cement and fine and coarse aggregate for reinforced concrete work shall conform to the quality of materials as defined in section fourteen of this act.

*Reinforcements.*—Steel for reinforcement shall conform to the Standard Specifications for Steel Reinforcement Bars of the American Society for Testing Materials, as from time to time revised. It shall be free from mill scale and loose rust and shall not be coated in such manner as to weaken the bond.

Sect. 15.]

*Mixing.*—The ingredients shall be thoroughly mixed, and the mixing shall continue until the cement is thoroughly distributed and the mass is uniform in color. The consistency shall be such that the concrete will flow freely about and entirely enclose the reinforcement, but shall not be so wet as to cause separation of the ingredients in handling.

*Inspection.*—Such portions of section fourteen as apply to inspection shall be taken to apply to this section also.

*Forms.*—Forms shall be sufficiently tight to prevent any considerable loss of material in the pouring.

*Placing.*—Such portions of section fourteen as apply to the placing of concrete shall be taken to apply to this section also. Concrete shall not be deposited in forms until the reinforcement has been put in place and secured against displacement.

Columns shall be poured without any interruption to the bottom side of beams or girders which they support, or to the bottom of the flare in flat slab construction. Special care shall be taken in their pouring that no void may result.

Columns and walls shall be poured not less than three hours in advance of the beams, girders, or slabs, which they support. All columns of the same type in a story shall be of concrete mixed in the same proportions.

Structural slabs shall be poured the full thickness at the time of pouring floor.

*Stopping Work.*—Proper precautions shall be taken in stopping concrete work to stop it at the points of low shear.

*High and Low Temperature.*—When fresh concrete is exposed to a hot or dry atmosphere or wind special precautions to prevent premature drying shall be taken.

Concrete shall not be deposited when the temperature is below thirty-two degrees Fahrenheit, unless adequate precautions are taken to prevent freezing.

Sect. 15.]

*Fire Protection.*—Main reinforcement in floor slabs shall be protected by a minimum of three fourths of an inch of concrete; in beams, girders, columns and walls by one and one half inches from the surface of the concrete to the surface of the main reinforcement.

In columns the outer one and one half inches of concrete shall be regarded as fireproofing which shall be assumed to carry no stress.

*Rust Protection.*—In foundations and retaining walls the steel shall be protected and on the side toward the earth or water by a minimum of three inches of concrete.

*Spacing of Reinforcement.*—Slab reinforcement bars in tension shall be not farther apart horizontally than two and one half times the total thickness of the slab. In beams and girders the lateral spacing of parallel bars shall be not less than three diameters from centre to centre, and the clear space between two layers of bars shall not be less than one inch.

*Basis for Design.*—Calculations shall be made with reference to working stresses and safe loads rather than with reference to ultimate strength and ultimate loads, and shall be based on the following assumptions:—

(a) A plane section before bending remains plane after bending.

(b) The modulus of elasticity of concrete in compression, within the usual limits of working stresses is constant. The distribution of compressive stress in beams, therefore, is rectilinear.

(c) The tensile strength of the concrete in direct resistance to bending is ignored.

(d) Under compressive stress the two materials are stressed in proportion to their moduli of elasticity.

(e) Initial stress in the reinforcement due to contraction or expansion in the concrete is neglected.

*Span Length.*—The span length for beams and slabs

Sect. 15.]

simply supported shall be taken as the distance from centre to centre of supports, but need not be taken to exceed the clear span plus the depth of beam or slab. For continuous or restrained beams or slabs, built monolithically into supports, the span length may be taken as the clear distance between faces of supports. Brackets shall not be considered as reducing the clear span in the sense here intended, except that when brackets which make an angle of forty-five degrees or more with the axis of a restrained beam or the plane of a slab are built monolithically therewith, the span may be measured from the section where the total depth is at least one third more than the depth at the edge of the bracket. Maximum negative moments are to be considered as existing at the end of the span as here defined.

*Bending.*— Bending moments for uniformly distributed dead and live loads, in beams and slabs reinforced in one direction only shall be computed upon the following assumptions, where “w” is the total dead and live load per linear foot and “l” is the span length:—

(a) for a single span freely supported the bending at mid-span is

$$\frac{wl^2}{8}$$

(b) for a single span restrained at the ends, the bending at mid-span is

$$\frac{wl^2}{12}$$

(c) for two equal continuous spans freely supported, the bending at mid-span is

$$\frac{wl^2}{10}$$

and at central support it is

$$\frac{wl^2}{8}$$



Sect. 15.]

(d) for two equal continuous spans restrained at supports, the bending at mid-span is

$$\frac{wl^2}{12}$$

and at central support it is

$$\frac{wl^2}{10}$$

(e) for three or more equal continuous spans freely supported, the bending at mid-span of the end span and at the first interior support is

$$\frac{wl^2}{10}$$

and the bending at mid-span of interior spans and at other interior supports is

$$\frac{wl^2}{12}$$

(f) for three or more equal continuous spans restrained at supports, the bending at the first interior support for beams is

$$\frac{wl^2}{10}$$

and for slabs is

$$\frac{wl^2}{12}$$

and the bending at all other interior supports and at mid-span of all spans is

$$\frac{wl^2}{12}$$


(g) at the restrained ends of continuous beams a negative bending of

$$\frac{wl^2}{16}$$

shall generally be assumed, but this shall be increased to not more than  $\frac{wl^2}{12}$  for small beams running into large columns.

Sect. 15.]

(b)




(a)




(c)




(d)

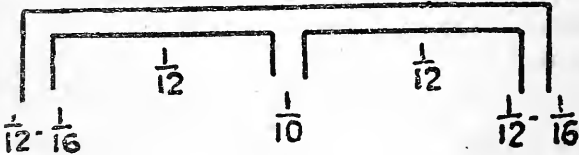

(e)



(f)

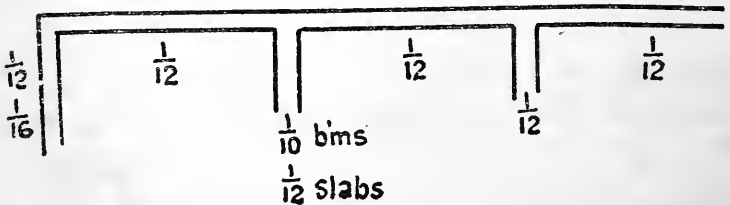

Sect. 15.]

## BEAMS AND SLABS.

Beams and slabs shall be considered as restrained at the ends when they frame monolithically into a structure sufficiently stiff and strong to introduce a negative bending moment into the beam at the end in amount not less than  $\frac{wl^2}{16}$ .

## CONTINUOUS BEAMS.

For continuous beams subject to other than uniformly distributed loads, the positive bending moment shall first be computed as though the beam were freely supported. The positive moment may then be reduced in the same proportion as specified above for beams loaded uniformly, and provision shall be made at the restrained ends for negative moments having the same ratio to the positive moment first computed that the negative moments specified above bear to  $\frac{wl^2}{8}$ .

Beams parallel to the main reinforcement of a one-way slab into which no other beams frame, and which are restrained at the ends by being built monolithically into supporting columns, shall be designed for bending moments at the ends equal to  $\frac{wl^2}{12}$ , and at mid-span as follows: When the width of columns parallel to the axis of the beam is not less than fifteen per cent of the distance, centre to centre of columns, or twice the depth of the beam,  $m = \frac{wl^2}{20}$ ; otherwise  $m = \frac{wl^2}{16}$ .

## SPANS OF UNUSUAL OR UNEQUAL LENGTH.

For spans of unusual or unequal length and other special cases the design shall be such as to carry out the intent of this act to the satisfaction of the commissioner.

Sect. 15.]

*Slabs Supported on Four Sides.*— For slabs, supported on four sides and reinforced in both directions the distributions of loads shall be determined by the formula

$$r = \frac{l}{b} - 0.5$$

where

$b$  is the breadth of slab.

$l$  is the length of slab.

$r$  is the proportion of load carried by the transverse reinforcement.

#### REINFORCEMENT IN SLABS.

In placing reinforcement in such slabs account shall be taken of the fact that the bending moment is greater near the centre of the slab than near the edges, and two thirds of the calculated moments shall be assumed as carried by the centre half of the slab and one third by the outside quarters.

Beams supporting rectangular slabs reinforced in both directions shall be assumed to take the proportions of load as determined by the formula in this section, the distribution of the load being assumed to vary in accordance with the ordinates of a parabola having its vertex at mid-span.

*Floor and Roof Openings.*— Openings in floors and roofs shall be so framed as not to exceed the allowable stresses.

*Depth.*— In roof slabs the total depth shall not be less than three inches and in floor slabs four inches.

In "T" beams the depth below the slab shall not exceed eight times the thickness of the slab adjacent to the stem.

Cinder concrete slabs shall not be less than four inches thick; they shall not exceed eight feet in span.

Sect. 15.]

*Self-Centring.*— Reinforcing materials which are self-centring shall not be used in spans exceeding eight feet. Fireproofing under self-centring reinforcement may be of Portland cement plaster.

*Bending in Supporting Members.*— If a beam or floor slab is assumed as fixed or partially restrained at a support, the column, wall, or other structure furnishing such restraint shall be proportioned to resist the stresses thereby induced.

*"T" Beams.*— Where adequate bond and shearing resistance between slab and web of beam is provided, the slab may be considered an integral part of the beam, but its effective width shall not exceed *one fourth* part of the *span length* of the beam, nor shall its overhanging width on either side of the web exceed *six times* the *thickness of the slab*.

*Columns.*— Columns or piers of concrete shall be reinforced when the unsupported height exceeds six times the least gross dimension, and no reinforced concrete column shall have an unsupported height of more than twelve times its least gross dimension, except with stresses reduced from those allowed by this act in accordance

$$24 - \frac{h}{d}$$

with the ratio  $\frac{h}{d}$  where  $h$  is unsupported height and

$d$  is least dimension, and  $\frac{h}{d}$  shall not in any case exceed

eighteen. The maximum effective area of columns shall be taken as the area within the outer one and one half inches of concrete covering, or, in the case of hooped columns or columns reinforced with structural shapes, it shall be taken as the area within the circle enclosing the spiral or the polygon enclosing the structural shapes. Longitudinal reinforcement shall be assumed to carry

Sect. 15.]

stress in proportion to the respective moduli of elasticity as given in this act.

#### EXTERIOR COLUMNS AND THEIR REINFORCEMENT.

Exterior columns and their reinforcement shall be so proportioned as to withstand bending in addition to the direct load without exceeding the fiber stresses specified for beams elsewhere in this act.

#### REINFORCED CONCRETE BUILDINGS.

Reinforced concrete buildings may be supported by structural steel or cast iron columns, fireproofed in first class construction as provided elsewhere in this act. Brackets shall be provided to transmit the load from the floors to the columns. Such columns shall be computed as follows: —

#### BRACKETS.

(a) If the brackets are placed immediately below the floor the structural steel or cast iron columns shall be assumed to carry the load of all the floors above.

(b) If the brackets are placed immediately above a floor the structural steel or cast iron columns shall be assumed to carry all the load above the brackets, and the floor or floors below the brackets shall be carried on reinforced concrete encasing the metal, designed in accordance with the requirements of this act, to the next bracket below or to the foundation. In this case, however, the surrounding concrete shall be so separated from the steel or cast iron as to permit the separate action of both.

#### CIRCULAR HOLLOW COLUMNS.

Circular hollow steel or wrought iron columns filled with concrete shall be allowed to carry a load equal to the capacity of the metal casing plus the capacity of the

Sect. 15.]

concrete filling. The average unit stress in the casing shall be that specified elsewhere in this act for columns, and that in the concrete filling shall be in the same ratio to the unit stress in the casing which the modulus of elasticity of the concrete bears to that of the casing.

Columns with longitudinal reinforcement only shall have a steel area of not less than one per cent and not more than four per cent of the required effective area, and shall be allowed the stresses given in this act. Longitudinal reinforcement bars shall be straight and shall be secured against lateral displacement by steel ties not less than one fourth of an inch in diameter and placed not farther apart than sixteen diameters of the bars, not more than twelve inches.

#### COLUMNS WHICH HAVE LONGITUDINAL REINFORCEMENT.

Columns which have longitudinal reinforcement to an amount not less than one per cent and not more than four per cent of the effective area, and which also have hoops or spirals to an amount not less than one per cent of the volume of the enclosed core, spaced not farther apart in the clear than one sixth of the diameter of the enclosed core, and in no case more than two and one half inches, shall be allowed the stresses given in this act; *provided, however*, that no such column shall have a height greater than ten diameters of the enclosed core. The ends of hoops or spirals shall be united in such a way as to develop their full strength. The hoops or spirals shall be securely fastened to the longitudinal reinforcement or to approved spacers.

*Combination Floors.*—Concrete floors with permanent blocks or forms of incombustible material with ribs of reinforced concrete between shall conform to the requirements of this act so far as they are applicable, but the blocks or forms shall not be assumed as taking stress. If

Sect. 15.]

a slab not less than two inches thick above the blocks or forms is cast monolithic with the rib, the rib and slab may be considered as a T section. If such construction forms a flush ceiling, or if a plastered ceiling on metal lath is suspended below the ribs, the fireproofing for such construction shall be that required for slabs.

*Working Stresses.*—The following table gives the compressive strength in pounds per square inch which shall be assumed as the basis for design, a bag of cement weighing ninety-four pounds being assumed to measure one cubic foot in proportioning material, and the values given for aggregate to be the combined volume of fine and coarse aggregate measured separately.

MIXTURE.	1:3.	1:4½.	1:6.	1:7.	1:7½.	1:9.
Stone concrete.....	3,300	2,800	2,200	—	1,800	1,400
Cinders or slag concrete..	1,000	875	750	675	625	—

#### ALLOWABLE STRESSES.

In all computations allowable stresses shall be used, based, as hereinafter specified, upon assumed ultimate strengths as given above, and no concrete shall be used which, when made under laboratory conditions into test cylinders eight inches diameter and sixteen inches long and tested in compression at an age of twenty-eight days, does not show a strength at least equal to that given in the table.

Concrete one year old shall be considered to have a compressive strength twenty-five per cent greater than that given in the table for concrete of the same grade and proportions.

*Bearing.*—When compression is applied to a portion of a concrete surface of which the area is at least twice



Sect. 15.]

that to which the load is applied, a stress of thirty-five per cent of the compressive strength fixed by this act shall be allowed.

*Axial Compression.*—For concentric compression on columns with longitudinal reinforcement only, twenty-two and five tenths per cent of the compressive strength fixed by this act shall be allowed.

For concentric compression on columns the length of which does not exceed ten diameters of the core, with longitudinal reinforcement combined with hoops or spirals, thirty-five per cent of the compressive strength fixed by this act shall be allowed.

*Bending.*—Compression on extreme fiber in bending shall not exceed thirty-two and five tenths per cent of the compressive strength fixed by this act: *provided, however,* that adjacent to the supports of continuous beams or slabs thirty-seven and five tenths per cent may be used.

*Shear and Diagonal Tension.*—In the calculation of beams in which the maximum shearing stress in a section is used as the means of measuring the resistance to diagonal tension stress, the vertical shearing unit stress as computed by the formula  $v = \frac{V}{bjd}$ , where  $v$  is the shearing unit stress,  $V$  is the total shear,  $b$  is the breadth of the beam, and  $jd$  is the arm of the resisting couple, shall not exceed the following percentages of the respective compressive strengths fixed by this act.

#### BEAMS WITH HORIZONTAL BARS ONLY.

For beams with horizontal bars only and without web reinforcement, two per cent.

#### BEAMS WITH WEB REINFORCEMENT.

For beams with web reinforcement consisting of vertical stirrups looped about the longitudinal reinforcing bars in

Sect. 15.]

the tension side of the beam, suitably anchored in the compression side and spaced horizontally not more than one half the depth of the beam, or for beams in which longitudinal bars are bent up at an angle of not more than forty-five degrees nor less than twenty degrees with the axis of the beam and the points of bending are spaced horizontally not more than three fourths of the depth of the beam apart, or both, the web reinforcement being designed, in each case, to carry two thirds of the total shear, six per cent.

*Punching.*—Punching shear shall not exceed six per cent of the compressive strength fixed by this act.

*Bond.*—The bond stress between concrete and steel bars shall not exceed four per cent, except that the bond between concrete and approved deformed steel bars shall not exceed five per cent, and between concrete and drawn wire shall not exceed three per cent of the compressive strength fixed by this act.

*Steel.*—The tensile or compressive stress in steel shall not exceed sixteen thousand pounds per square inch in rods and twenty thousand pounds per square inch in drawn wire and other approved cold stretched fabric, except that in slabs of stone concrete the tensile stress in rods shall not exceed eighteen thousand pounds per square inch, and in drawn wire and other approved cold stretched fabric it shall not exceed twenty-two thousand five hundred pounds per square inch.

*Modulus of Elasticity.*—The modulus of elasticity of concrete shall be taken as —

1-30th that of steel for cinder concrete with a compressive strength of 1,000 pounds per square inch or less.

1-15th that of steel for stone concrete with a compressive strength of 2,200 pounds per square inch or less.

1-12th that of steel for concrete with a compressive strength greater than 2,200 pounds per square inch, but less than 2,900 pounds per square inch.

Sect. 15.]

1-10th that of steel for concrete with a compressive strength of 2,900 pounds per square inch or more, the compressive strength referred to in all these cases being that fixed by this act.

*Footings General.*—Symmetrical, concentric column footings shall be designed for punching shear, diagonal tension and bending moment.

*Punching Shear in Footings.*—The area effective to resist punching shear in column footings shall be considered as the area having a width equal to the perimeter of the column or pier and a depth equal to seven eighths the depth of footing from top to centre of reinforcing steel.

*Diagonal Tension in Footings.*—Shearing stresses as indicative of diagonal tension shall be measured in footings on vertical sections distant from the face of the pier or column equal to the depth of the footing from top to centre of reinforcing steel.

*Bending Moment in Footings.*—The bending moment in rectangular isolated column footings at a section taken at the edge of pier or columns shall be determined by multiplying the load on the cantilever projection by three eighths the distance from the edge of pier or column to the edge of footing. The section of maximum moment in a footing supporting a round column or pier shall be taken one eighth the radius from the tangent toward the centre. The effective area of concrete and steel to resist bending moment shall be considered as that within a width extending both sides of pier or column a distance equal to depth of footing plus one half the remaining distance to edge of footing, except that reinforcing steel crossing the section other than at right angles shall be considered to have an effective area determined by multiplying the sectional area by the sine of the angle between the bar and the plane of the section. The bond stress in the steel shall not exceed that allowed by this act.

*Flat Slabs.*—Floor slabs supported upon columns with-

Sect. 15.]

out beams or girders and extending two or more bays in each direction shall conform to the following requirement.

*Capital.*—Columns may be provided with enlarged capitals. The horizontal width of capitals shall be taken where the vertical thickness is at least one and one half inches, and the contour of capitals shall not fall within that of an inverted cone or pyramid whose apex is on the centre line of the column, whose sides incline at forty-five degrees with the vertical, and whose base lies in a plane one and one half inches below the underside of the dropped panel and, if no dropped panel is used, below the underside of the slab, and has the same size and shape in plan as the capital. The width of capital in any direction shall not be less than one fifth the distance, centre to centre, of columns in that direction, and shall be such that the allowable unit stresses elsewhere specified in this act shall not be exceeded.

*Dropped Panel.*—A thickening of the slab on the underside in the vicinity of the columns is termed a dropped panel. The width of the dropped panel in any direction shall be not less than  $\frac{3}{2}$  that of the column capital. The depth of the dropped panel below the bottom of the slab shall be not more than half the slab thickness, but shall be such that the allowable unit stresses shall not be exceeded either in shear about the column capital or in bending. The allowable unit shear to be used shall be that specified for punching shear elsewhere in this act. The allowable compression in bending shall be that specified for extreme fibers adjacent to support in continuous beams.

*Slab Thickness.*—In flat slab construction, the minimum thickness of slab shall be not less than  $\frac{1}{40}$  in the case of roofs or  $\frac{1}{32}$  in the case of floors, of the distance from centre to centre of the columns in the longer direction. The thickness shall be such as to withstand the

Sect. 15.]

shear about the column capital or dropped panel without exceeding the allowable stress herein specified for punching shear.

*Bending.*— For the purpose of determining the bending in flat slab floors, the slab shall be considered as divided by lines parallel to the lines of columns into strips whose width is one half the distance,  $L$ , centre to centre, of columns measured at right angles to the span of strips. The centre line of alternate strips shall coincide with the centre line of the columns. These shall be known as A-strips. The other strips located midway between columns shall be known as B-strips. The span length of the strips shall be taken as the distance, centre to centre, of columns less two thirds the width of the column capital measured in the direction of the span.

#### A AND B STRIPS COMPRISING ANY PANEL WIDTH.

Provision shall be made in the A and B strips comprising any panel width for the whole bending moment specified, and the proportion of the whole provided for within each strip shall be not less than that given in the following table:—

	PER CENT.		
	A-Strip.	B-Strip.	Either Strip.
Positive moment, dropped panel.....	60	25	15
Positive moment, no dropped panel.....	55	25	20
Negative moment, dropped panel.....	80	15	5
Negative moment, no dropped panel....	65	20	15

*Interior Bays.*— If

$$l = \text{span as given above} - L - \frac{2}{3}c$$

where  $c$  = diameter of column capital

$w$  = total load per square foot

Sect. 15.]

whether the panels be square or oblong and in whichever direction the span be taken, the bending moments at the critical portions of interior bays shall be assumed as follows:—

*Positive Bending.*— The positive bending moment for a whole panel width shall be taken as

$$M = \frac{wLl^2}{25}$$

*Negative Bending.*— The negative bending moment for a panel width shall be taken as

$$M = \frac{wLl^2}{15}$$

*Wall Bays, Restraint.*— For wall bays when the wall is of reinforced concrete ( $l$  is the distance from the inside face of the exterior column to the centre of the interior column less one third the width of the interior column capital) the bending moment for strips running perpendicular to the wall shall be as follows:—

*Positive Bending.*— The positive bending moment for a panel width shall be taken as

$$M = \frac{wLl^2}{20}$$

*Negative Bending.*— The negative bending moment for a panel width at the interior line of columns shall be taken as:—

$$M = \frac{wLl^2}{12.5}$$

The negative bending moment for a panel at the wall shall in general be taken as:—

$$M = \frac{wLl^2}{30}$$

This may be increased, according to degree of restraint, up to  $\frac{wLl^2}{15}$  for complete restraint: *provided, however, that*

Sect. 15.]

in case the coefficient for negative bending at the wall is increased, the other two bending moment coefficients may be correspondingly decreased.

*Wall Bays, No Restraint.*— For wall bays supported on one edge upon brick walls or other construction incapable of providing adequate restraint in negative bending,  $l$  is the distance from the inner face of the wall to the centre of the interior column less one third the width of the interior column capital.

*Positive Bending.*— The positive bending moment for a panel width shall be taken as: —

$$M = \frac{wLl^2}{16}$$

*Negative Bending.*— The negative bending moment for a panel width at the interior column line shall be taken as: —

$$M = \frac{wLl^2}{10}$$

Negative bending along such walls shall be provided for by reinforcement in the top of the slab at right angles with the wall equal to four tenths per cent in floors and to two tenths per cent in roofs of the area of cross-section of the slab.

Bays discontinuous upon one or two adjacent sides shall be treated as wall bays.

When a flat slab is supported by a beam or wall on one or two sides, the half strip parallel with and adjacent to the beam or wall may be reinforced as half a B-strip.

The bending in exterior concrete columns supporting flat slab floors shall in general be taken as: —

$$\frac{wLl^2}{30} \text{ plus } \frac{Wh}{4},$$

or more up to

$$\frac{wLl^2}{15} \text{ plus } \frac{Wh}{4}$$

Sect. 15.]

in case of complete restraint, where  $W$  is the total load on the wall panel and  $h$  is the thickness of the exterior column.

For floors, half this bending shall be assumed as acting below and half above the slab; for roofs the whole bending acts below the slab.

*Brackets.*— Brackets or haunches shall be provided on exterior columns when necessary to transmit the shear and bending from the slab to the column.

*Interior Columns.*— The least dimension of interior concrete columns supporting flat slabs shall be not less than one fifteenth the span, centre to centre, of columns in the longer direction.

*Reinforcement.*— Reinforcement shall be provided at the critical sections of all strips in sufficient quantity to withstand the bending herein specified without exceeding the allowable unit stresses elsewhere specified in this act. Reinforcement lying obliquely to the axis of any strip shall be counted as having an area effective for that strip equal to its actual area of cross-section multiplied by the cosine of the angle which it makes with the axis of the strip.

*Bent Bars.*— No reinforcing for positive bending shall be bent up to the top of the slab further from the centre line of the column than one fourth  $L$  where  $L$  is the distance, centre to centre of columns in the direction of the reinforcing. Positive reinforcement in A-strips shall be provided to within 0.15  $L$  of the centre line of interior columns and extending to the inside face of wall columns; in B-strips shall be provided extending to within 0.10  $L$  of the interior column line and to the inside face of wall support. Negative reinforcement in A-strips shall extend beyond the centre line of the columns half the width of the column capital plus enough to develop the strength of the rods; at least one quarter of the negative reinforcement shall extend six inches beyond the quarter point of



Sect. 15.]

the panel or the fifth point of the span length. Negative reinforcement in B-strips shall extend forty diameters beyond the centre line of columns, and at least half thereof shall extend to the quarter point of the panel.

#### STRESS IN CONCRETE.

For determining the stress in concrete due to the bending in each strip the width shall be taken as the width of the strip, except that for negative bending in A-strips when a dropped panel is used the width shall be that of the dropped panel.

*Wall Beams.*— Wall beams in flat slab construction shall be assumed to carry a width of floor equal to one quarter the clear span of the beam in addition to the weight of beam and wall. Such beams, when continuous, shall be designed for a negative bending at columns equal to  $\frac{wl^2}{12}$  and the positive bending at mid-span shall be assumed as follows:—

(a) When the width of the columns (parallel to the beam) is not less than fifteen per cent of the distance, centre to centre, of columns or twice the depth of the beam,

$$M = \frac{wl^2}{20}$$

(b) Otherwise,

$$M = \frac{wl^2}{16}$$

*Brick Walls.*— In case a flat slab is supported by a brick wall, the wall shall in general be four inches thicker than the minimum thickness otherwise required by this act, or have equivalent pilasters.

#### FORMULAS FOR REINFORCED CONCRETE CONSTRUCTION.

These formulas are based on the assumptions and principles given in section fifteen.

Sect. 15.]

## 1. STANDARD NOTATION.

(a) *Rectangular Beams.*

The following notation is recommended:

 $f_s$  = tensile unit stress in steel; $f_c$  = compressive unit stress in concrete; $E_s$  = modulus of elasticity of steel; $E_c$  = modulus of elasticity of concrete;

$$n = \frac{E_s}{E_c};$$

 $M$  = moment of resistance, or bending moment in general; $A_s$  = steel area; $b$  = breadth of beam; $d$  = depth of beam to centre of steel; $k$  = ratio of depth of neutral axis to depth,  $d$ ; $z$  = depth below top to resultant of the compressive stresses; $j$  = ratio of lever arms of resisting couple to depth,  $d$ . $jd$  =  $d - z$  = arm of resisting couple;

$$p = \text{steel ratio} = \frac{A_s}{bd}.$$

(b) *T-Beams.* $b$  = width of flange; $b'$  = width of stem; $t$  = thickness of flange.(c) *Beams Reinforced for Compression.* $A'$  = area of compressive steel; $p'$  = steel ratio for compressive steel; $f_s'$  = compressive unit stress in steel; $C$  = total compressive stress in concrete; $C'$  = total compressive stress in steel; $d'$  = depth to centre of compressive steel; $z$  = depth to resultant of  $C$  and  $C'$ .(d) *Shear, Bond and Web Reinforcement.* $V$  = total shear; $V'$  = total shear producing stress in reinforcement; $v$  = shearing unit stress; $u$  = bond stress per unit area of bar;

Sect. 15.]

$o$  = circumference of perimeter of bar;

$\Sigma o$  = sum of the perimeters of all bars;

$T$  = total stress in single reinforcing members;

$s$  = horizontal spacing of reinforcing members.

(e) Columns.

$A$  = total net area;

$A_s$  = area of longitudinal steel;

$A_c$  = area of concrete;

$P$  = total safe load.

2. FORMULAS.

(a) Rectangular Beams.

Position of neutral axis,

$$k = \sqrt{2pn + (pn)^2} - pn \dots \dots \dots (1)$$

Arm of resisting couple,

$$j = 1 - \frac{1}{3}k \dots \dots \dots (2)$$

[For  $f_s = 15000$  to  $16000$  and  $f_c = 600$  to  $650$ ,  $j$  may be taken at  $\frac{7}{8}$ .]

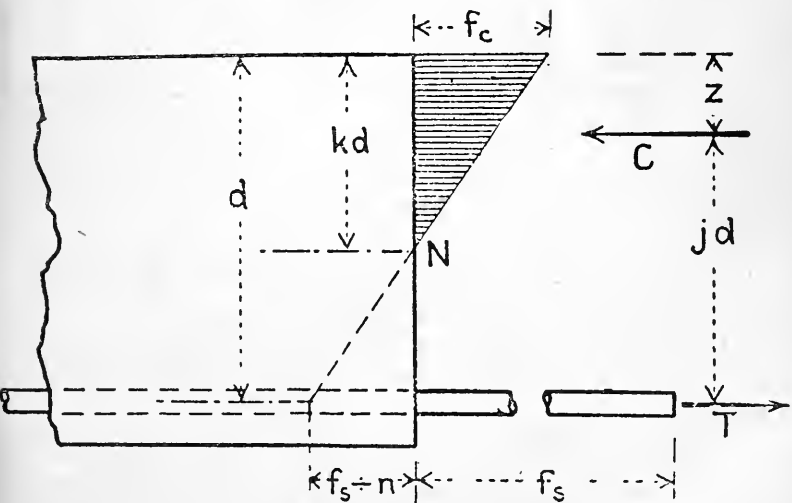


FIG. 1.

Sect. 15.]

Fiber stresses,

$$f_s = \frac{M}{Asjd} = \frac{M}{pjbd^2} \dots \dots \dots (3)$$

$$f_c = \frac{2M}{jkb^d^2} = \frac{2pfs}{k} \dots \dots \dots (4)$$

Steel ratio, for balanced reinforcement,

$$p = \frac{1}{2} \cdot \frac{1}{\frac{f_s}{f_c} \left( \frac{f_s}{n f_c} + 1 \right)} \dots \dots \dots (5)$$

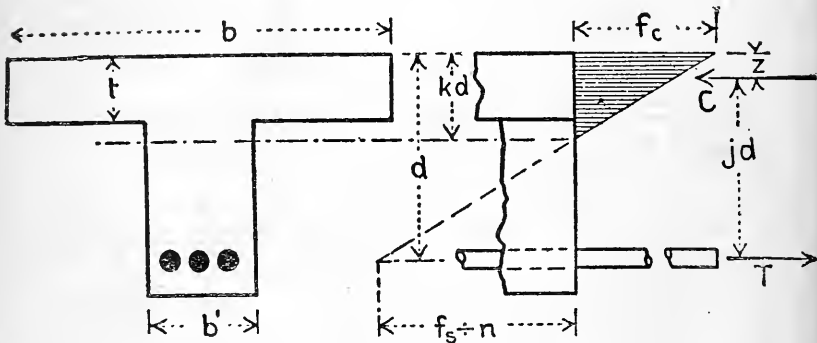
(b) *T-Beams.*

FIG. 2.

Case I. When the neutral axis lies in the flange, use the formulas for rectangular beams.

Case II. When the neutral axis lies in the stem.

The following formulas neglect the compression in the stem.

Position of neutral axis,

$$kd = \frac{2ndAs + bt^2}{2nAs + 2bt} \dots \dots \dots (6)$$

Sect. 15.]

Position of resultant compression,

$$z = \frac{3kd - 2t}{2kd - t} \cdot \frac{t}{3} \dots \dots \dots (7)$$

Arm of resisting couple,

$$jd = d - z \dots \dots \dots (8)$$

Fiber stresses,

$$f_s = \frac{M}{A_s jd} \dots \dots \dots (9)$$

$$f_c = \frac{Mkd}{bt(kd - \frac{1}{2}t)jd} = \frac{f_s}{n} \cdot \frac{k}{1 - k} \dots \dots \dots (10)$$

(For approximate results the formulas for rectangular beams may be used.)

The following formulas take into account the compression in the stem; they are recommended where the flange is small compared with the stem:

Position of neutral axis,

$$kd = \sqrt{\frac{2ndA_s + (b - b')t^2}{b'} + \left(\frac{nA_s + (b - b')t}{b'}\right)^2} - \frac{nA_s + (b - b')t}{b'} \dots \dots \dots (11)$$

Position of resultant compression,

$$z = \frac{(kdt^2 - \frac{2}{3}t^3)b + [(kd - t)^2 (t + \frac{1}{3}(kd - t))] b'}{t(2kd - t)b + (kd - t)^2 b'} \dots \dots (12)$$

Arm of resisting couple,

$$jd = d - z \dots \dots \dots (13)$$

Fiber stresses,

$$f_s = \frac{M}{A_s jd} \dots \dots \dots (14)$$

$$f_c = \frac{2Mkd}{[(2kd - t)bt + (kd - t)^2 b']jd} \dots \dots \dots (15)$$

(c) Beams Reinforced for Compression.

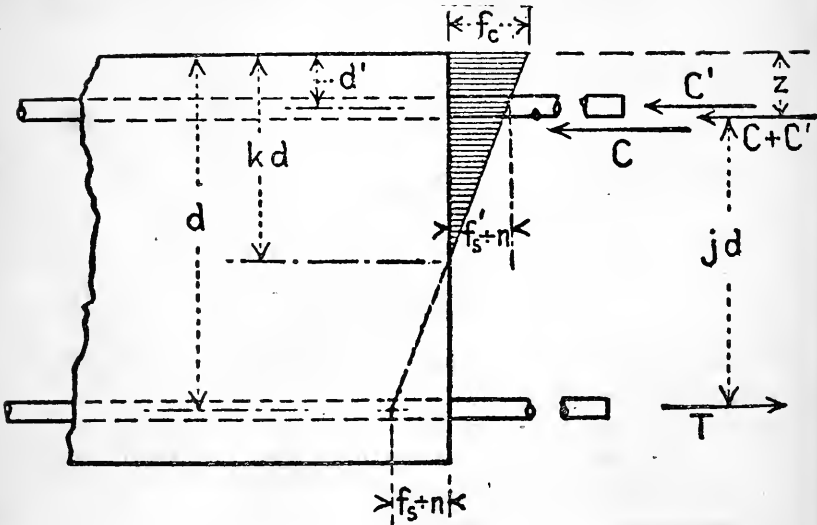


FIG. 3.

Position of neutral axis,

$$k = \sqrt{2n\left(p + p'\frac{d'}{d}\right) + n^2(p + p')^2 - n(p + p')} \dots (16)$$

Position of resultant compression,

$$z = \frac{\frac{1}{3}k^3d + 2p'nd'\left(k - \frac{d'}{d}\right)}{k^2 + 2p'n\left(k - \frac{d'}{d}\right)} \dots (17)$$

Arm of resisting couple,

$$jd = d - z \dots (18)$$

Fiber stresses,

$$f_c = \frac{6M}{bd^2 \left[ 3k - k^2 + \frac{6p'n}{k} \left( k - \frac{d'}{d} \right) \left( 1 - \frac{d'}{d} \right) \right]} \dots (19)$$

Sect. 15.]

$$f_s = \frac{M}{pjb d^2} = n f_c \frac{1-k}{k} \dots \dots \dots (20)$$

$$f_s' = n f_c \frac{k - \frac{d'}{d}}{k} \dots \dots \dots (21)$$

(d) *Shear, Bond, and Web Reinforcement.*

For rectangular beams,

$$v = \frac{V}{bjd} \dots \dots \dots (22)$$

$$u = \frac{V}{jd \cdot \Sigma o} \dots \dots \dots (23)$$

[For approximate results  $j$  may be taken at  $\frac{7}{8}$ .]

The stresses in web reinforcement may be estimated by means of the following formulas:

Vertical web reinforcement,

$$T = \frac{V's}{jd} \dots \dots \dots (24)$$

Bars bent up at angles between 20 and 45 deg. with the horizontal and web members inclined at 45 deg.

$$T = \frac{3}{4} \frac{V's}{jd} \dots \dots \dots (25)$$

In the text of the report it is recommended that two thirds of the external vertical shear (total shear) at any section be taken as the amount of total shear producing stress in the web reinforcement.  $V'$  therefore equals two thirds of  $V$ .

The same formulas apply to beams reinforced for compression as regards shear and bond stress for tensile steel.

Sect. 15.]

For T-Beams,

$$v = \frac{V}{b'jd} \dots \dots \dots (26)$$

$$u = \frac{V}{jd \cdot \sum o} \dots \dots \dots (27)$$

[For approximate results  $j$  may be taken at  $\frac{7}{8}$ .]

(e) Columns.

Total safe load,

$$P = f_c(A_c + nA_s) = f_cA(1 + (n-1)p) \dots \dots \dots (28)$$

Unit stresses,

$$f_c = \frac{P}{A(1 + (n-1)p)} \dots \dots \dots (29)$$

$$f_s = nf_c \dots \dots \dots (30)$$

[1918, c. 179, sect. 5, Special Act.]

## SECTION 16.

### STRUCTURAL STEEL.

The design, fabrication and erection of structural steel shall be in accordance with the following specifications:

#### 1. Allowable Stresses.

All parts of the structure shall be so proportioned that the sum of the maximum static stresses in pounds per square inch shall not exceed the following:

(a) *Tension*: Rolled Steel, on net section . . . . . 18,000

(b) *Compression*: Rolled Steel, on short lengths  
or where lateral deflection is prevented, . . . . . 18,000

On gross section of columns,

$$1 + \frac{18,000}{18,000r^2}$$

with a maximum of . . . . . 13,500



Sect. 16.]

In which  $l$  is the unsupported length of the column, and  $r$  is the corresponding least radius of gyration of the section, both in inches.

For main compression members, the ratio  $l/r$  shall not exceed 160, and for bracing and other secondary members, 200.

(c) *Bending*: On extreme fibres of rolled shapes, and built up sections, net section, if lateral deflection is prevented . . . . . 18,000

When the unsupported length  $l$  exceeds 15 times  $b$ , the width of the compression flange, the stress in pounds per square inch in the latter shall not exceed

$$1 + \frac{20,000}{2,000b^2}$$

The laterally unsupported length of beams and girders shall not exceed 40 times  $b$ , the width of the compression flange.

On extreme fibres of pins, when the forces are assumed as acting at the center of gravity of the pieces . . . . . 27,000

(d) *Shearing*:

On pins . . . . . 13,500

On power-driven rivets . . . . . 13,500

On turned bolts in reamed holes with a clearance of not more than 1/50 of an inch . . . . . 13,500

On hand-driven rivets . . . . . 10,000

On unfinished bolts . . . . . 10,000

On the gross area of the webs of beams and girders, where  $h$ , the height between flanges in inches, is not more than 60 times  $t$ , the thickness of the web in inches . . . . . 12,000

Sect. 16.]

On the gross area of the webs of beams and girders if the web is not stiffened where  $h$ , the height between flanges in inches, is more than 60 times  $t$ , the thickness of the web, the maximum shear per square inch,  $S/A$  shall not exceed

$$1 + \frac{18,000}{7,200t^2} \frac{h^2}{h^2}$$

In which  $S$  is the total shear, and  $A$ , is gross area of web in square inches.

(e) <i>Bearing:</i>	Double Shear.	Single Shear.
On pins . . . . .	30,000	24,000
On power-driven rivets . . . . .	30,000	24,000
On turned bolts in reamed holes . . . . .	30,000	24,000
On hand-driven rivets . . . . .	20,000	16,000
On unfinished bolts . . . . .	20,000	16,000
On expansion rollers per lineal inch 600 times the diameter of the roller in inches.		

(f) *Combined Stresses:* For combined stresses due to wind and other loads, the permissible working stress may be increased 20%, provided the section thus found is not less than that required by the dead and live loads alone.

(g) *Members Carrying Wind Only:* For members carrying wind stresses only, the permissible working stresses may be increased 20%.

## 2. *Symmetrical Members.*

Sections shall preferably be symmetrical.

Sect. 16.]

### 3. Beams and Girders.

(a) *Rolled beams* shall be proportioned by the moment of inertia of their net section. Plate girders with webs fully spliced for bending shall be so proportioned that the unit stress on the net section does not exceed the stresses specified in paragraph 1 of this section as determined by the moment of inertia of the net section.

(b) *Plate girder webs* shall have a thickness of not less than  $1/160$  of the unsupported distance between the flanges.

(c) *Web splices* shall consist of a plate on each side of the web capable of transmitting the full stress through the splice rivets.

(d) *Stiffeners*: Stiffeners shall be required on the webs of rolled beams and plate girders at the ends and at points of concentrated loads, and at other points where  $h$  the clear distance between flanges is greater than  $85t\sqrt{18,000(A/S)} - 1$ , in which  $t$  is the thickness of the web. When stiffeners are required, the distance in inches between them shall not be greater than  $85t\sqrt{18,000(A/S)} - 1$ , or not greater than 6 feet. Stiffeners under or over concentrated loads shall be proportioned to distribute such loads into the web.

Plate girder stiffeners shall generally be in pairs, one on each side of the web, and shall have a close bearing against the flange angles at points of concentrated loading. The pitch of rivet in stiffeners shall not exceed 6".

(e) *Flange plates* of all girders shall be limited in width so as not to extend more than 6" or more than 12 times the thickness of thinnest plate beyond the outer row of rivets connecting them to the angles.

(f) *Crane runway girders* and the supporting framework shall be proportioned to resist the greatest horizontal stresses caused by the operation of the cranes.

(g) *Rivets* connecting the flanges to the web at points

Sect. 16.]

of direct load on the flange between stiffeners shall be proportioned to carry the resultant of the longitudinal and transverse shears.

(h) *Rivets* connecting the flanges to the webs of plate girders and of columns subjected to bending shall be so spaced as to carry the increment of the flange stress between rivets.

#### 4. *Column Bases.*

(a) Proper provision shall be made to distribute the column loads on the footings and foundations.

(b) The top surface of all column bases shall be planed for the column bearing.

(c) Column bases shall be set true and level, with full bearing on the masonry, and be properly secured to the footings.

#### 5. *Eccentric Loading.*

Full provision shall be made for stresses caused by eccentric loads.

#### 6. *Combined Stresses.*

(a) Members subject to both direct and bending stresses shall be so proportioned that the greatest combined stresses shall not exceed the allowed limits.

(b) All members and their connections which are subject to stresses of both tension and compression due to the action of live loads shall be designed to sustain stress giving the largest section, with 50% of the smaller stress added to it. If the reversal of stress is due to the action of wind, the member shall be designed for the stress giving the largest section and the connections proportioned for the largest stress.

#### 7. *Abutting Joints.*

Compression members when faced for bearings shall be spliced sufficiently to hold the connecting members

Sect. 16.]

accurately in place. Other joints in riveted work, whether in tension or compression, shall be full spliced.

### 8. *Net Sections.*

(a) In calculating tension members, the net section shall be used, and in deducting the rivet holes they shall be taken  $\frac{1}{8}$  inch greater in diameter than the nominal diameter of the rivets.

(b) Pin-connected tension members shall have the section through the pin hole 25% in excess of the net section of the member, and a net section back of the pin hole equal to 75% of that required through the pin hole.

### 9. *Rivets and Bolts.*

(a) In proportioning rivets, the nominal diameter of the rivet shall be used.

(b) Rivets carrying calculated stresses, and whose grip exceeds five diameters, shall have their number increased 1% for each additional 1-10 inch in the rivet grip.

(c) Rivets shall be used for the splices and connections of main members, and for connections subject to reversal of stresses.

(d) Finished bolts in reamed holes may be used in shop or field work where it is impracticable to obtain satisfactory power-driven rivets. The finished shank shall be long enough to provide full bearing, and washers used under the nuts to give full grip when turned tight.

Unfinished bolts may be used in field work for connections in minor structures, and for secondary members of all structures such as purlins, girts, door and window framing, alignment bracing and secondary beams in floor.

### 10. *Rivet Spacing.*

Rivets shall be spaced in accordance with good engineering practice.

Sect. 16.]

*11. Connections.*

(a) Connections carrying calculated stresses except for lacing, sag bars, or angles, hand rails or beam connections, shall not have less than 2 rivets; or for field connections not less than 3 rivets.

(b) Members meeting at a joint shall have their lines of center of gravity meet at a point if practicable; if not, provision shall be made for any eccentricity.

(c) The rivets at the ends of any member transmitting the stresses into that member should have their centers of gravity in the line of the center of gravity of the member; if not, provision shall be made for the effect of the resulting eccentricity. Pins may be so placed as to counteract the effect of bending due to dead load.

(d) When a beam or grinder "A" is connected to another member in such a manner that "A" acts as a continuous or fixed end beam, proper provision shall be made for the bending moments at such a connection.

(e) Where stress is transmitted from one piece to another, through a loose filler, the number of rivets shall be properly increased.

*12. Expansion.*

Proper provision shall be made for expansion and contraction.

*13. Minimum Thickness.*

No steel less than  $\frac{5}{16}$  inch thick shall be used for exterior construction, nor less than  $\frac{1}{4}$  inch for interior construction, except for linings or fillers and the webs of rolled structural shapes.

Structural steel and sheet metal thinner than  $\frac{1}{4}$  inch forming a part of the construction of stairs, skylights, roof houses, fire escapes, light one-story buildings, or light-miscellaneous steel work may be used under such restrictions as the commissioner may prescribe.

Sect. 16.]

14. *Workmanship.*

(a) All workmanship shall be equal to the best practice in modern structural shops.

(b) Compression joints depending upon contact bearing shall have the bearing surfaces truly faced after the members are riveted.

(c) The use of a burning torch is permissible if the burned metal is not carrying stresses during the burning. Stresses shall not be transmitted into the metal through a burned surface.

15. *Erection.*

(a) The frame of all steel skeleton buildings shall be carried up true and plumb, and temporary bracing shall be introduced wherever necessary to take care of all loads to which the structure may be subjected, including erection equipment, and the operation of same. Such bracing shall be left in place as long as may be required for safety.

(b) As erection progresses the work shall be securely bolted up to take care of all dead load, wind and erection stresses.

(c) Wherever piles of material, erection equipment, or other loads are carried during erection, proper provisions shall be made to take care of stresses resulting from the same.

(d) No riveting shall be done until the structure has been properly aligned.

(e) Rivets driven in the field shall be heated and driven with the same care as those driven in the shop.

[1918, c. 179, sect. 6, Special Act.]

[1923, c. 462, sect. 10.]

[1924, c. 412, sect. 2.]

## SECTION 17.

## CLASSIFICATION.

*First and Second Class Buildings.*

Every building hereafter erected more than seventy-five feet in height, or hereafter increased in height to more than seventy-five feet, shall be a first class building. Every second class building hereafter erected more than four stories in height, and any second class building now in existence and increased in height to more than four stories shall have the first floor and the basement and cellar stories of first class construction except as hereinafter otherwise mentioned for buildings for habitation. Every building for habitation hereafter erected covering more than five thousand square feet, or more than five stories in height, shall be a first class building. Every building altered or enlarged and occupied or to be occupied as a habitation, to be in excess of sixty-five feet in height, or in excess of five thousand square feet in superficial area, or in excess of five stories in height, shall be a first class building. Every building hereafter erected within the building limits to be occupied as a permanent schoolhouse shall be a first class building. Every building hereafter erected as a theatre, and every building hereafter altered to be occupied as a theatre, shall be a first class building. Every building hereafter erected for, altered to or converted to use as a moving picture house shall be a first class building. All other buildings may be of second or third class construction.

Except as is otherwise provided herein, buildings adapted for habitations, and not more than five stories in height, may be erected, remodelled or enlarged of second class construction, but no such building shall exceed five thousand square feet in superficial area or sixty-five feet



Sect. 17.]

in height. Every such building exceeding thirty-five hundred square feet of superficial area, and every such building exceeding seventeen hundred and fifty square feet in superficial area, and more than four stories or fifty-five feet in height, shall have the first floor and basement and cellar stories of first class construction, with no openings through the first floor, except for piping; provided that stairways from the first story to the outside may penetrate the floor construction. Said stairs herein referred to are to be fireproof, separated from the basement or cellar by walls of solid masonry at least eight inches thick, with no opening to cellar or basement. The first story, or basement, or both the first story and basement, in such building more than seventeen hundred and fifty square feet in superficial area so constructed, remodelled or enlarged, may be used for mercantile purposes; provided that the floors and walls separating the portion of the building used for mercantile purposes and the portion used for habitation be of first class construction with no openings, except for piping, but that stairways from the portion used for habitation to the outside may penetrate the mercantile portion. In such event, the stairs herein referred to are to be constructed of incombustible material and separated from the latter by solid masonry walls at least eight inches thick with no openings to the portion used for habitation. In such buildings where the second floor is of first class construction the requirement providing for the first floor, basement and cellar stories to be of first class construction may be omitted.

#### RESTRICTION OF AREAS.

Any first class building used above the first floor as a warehouse or store for the storage or sale of merchandise shall have all *vertical openings protected by fireproof enclosures*. Such enclosures shall, if enclosing stairs or

Sect. 17.]

escalators, have automatic doors, and all glass in the enclosure shall be wire glass.

Such a building shall be so divided by brick walls built like party walls with the same openings allowed, that no space inside the buildings shall exceed in area *ten thousand square feet*, except that when any such building has a frontage of not less than *fifty feet on each of two streets*, such space may exceed *ten thousand square feet* in area, *provided* that buildings in which such extension of area beyond ten thousand square feet is permitted shall have *automatic fire sprinklers installed* and means of ingress and egress satisfactory to the commissioner and the board of appeal.

Second class buildings used above the first floor as warehouses or stores for the storage or sale of merchandise shall be *so divided by brick walls*, built like *party walls* with the same openings allowed, that no space inside such buildings shall exceed in area *ten thousand square feet*, and *no existing wall* in any second class building shall be removed so as to leave an *area of more than ten thousand square feet*, nor shall any existing wall separating areas which combined would exceed ten thousand square feet in area, have openings cut in it greater in area or number than is allowed in this act for party walls.

Every second class building more than *three* stories high and used above the first floor as a warehouse or store for the storage or sale of merchandise, shall have all vertical openings for elevators and stairways, air or light shafts, through its floors protected by fireproof enclosures. Such enclosures shall be supported by fireproof supports and framing, and shall, if enclosing stairs or escalators, have automatic doors, and all glass in the enclosure shall be wire glass.

No building used above the first floor for the storage or sale of merchandise shall have less than two means of

Sect. 17.]

egress from every story, one of which means may be either an outside fire escape or through a brick wall closed by automatic doors into a building of the same class; except than an independent monumental stairway extending from the basement to the second floor may be constructed.

#### BUILDINGS FOR MANUFACTURING PURPOSES.

Buildings *outside* the building limits and adapted exclusively for manufacturing, storage, mechanical or *stable* purposes, may be built under such conditions as the commissioner shall prescribe. If of wood such buildings shall not exceed forty-five feet in height.

[1914, c. 782, sect. 4.]

[1916, c. 248, Special Acts.]

[1918, c. 179, sect. 7, Special Act.]

[1921, c. 289, sect. 2.]

### SECTION 18.

#### CONSTRUCTION.

##### *Height.*

No building, structure or part thereof shall be erected or altered to a greater height than two and one half times the effective width of the street or streets upon which the building or structure stands, and not exceeding one hundred and fifty-five feet in height in any case.

The effective width of such street or streets shall be measured from the face of the proposed building or structure to the lawfully established line of the street on the opposite side. If the street is of uneven width the width shall be the average width between the proposed building or structure and the lawfully established line of the street on the opposite side. The measurements shall be taken from the extreme ends of the face of the building and a point at the center, said measurements to be made at street level.

Sect. 18.]

Whenever an effective width of a street is increased by an area or setback from the street, the building so set back may be increased in height to two and one half times the effective width of the street, not exceeding one hundred and fifty-five feet in height in any case.

Along a narrower street near its intersection with a wider street any building or any part of a building fronting on the narrower street, within one hundred feet from the side of the wider street, shall be governed by the height and roof setback regulations provided for the wider street. A corner building on such intersecting street shall be governed by the height and roof setback regulations provided for the wider street for one hundred and fifty feet from the side of such wider street measured along such narrower street. Beyond such points such corner building shall be governed by the height and roof setback regulations provided for the narrower street. On streets less than forty feet in width the same height regulations shall be applied as on streets forty feet in width.

Nothing in this section however shall prohibit the erection or alteration of any building, structure or part thereof to a height greater than (two and one half times the width of the street or streets upon which the building or structure stands but not exceeding one hundred and fifty-five feet in any case) if the external wall of a height greater than two and one half times the width of such street shall be set back from the vertical face of the building in the ratio of one foot horizontally for each two and one half feet vertically.

Nothing in this act shall authorize the erection or alteration of a building to a height greater than that authorized by existing law, or by existing ordinances, rules, regulations or orders, within the district or districts designated "B" by the commission on height of buildings in the city of Boston, under authority of chapter three hundred and

Sect. 18.]

thirty-three of the acts of nineteen hundred and four, chapter three hundred and eighty-three of the acts of nineteen hundred and five and chapter three hundred and thirty-three of the Special Acts of nineteen hundred and fifteen, and any acts in amendment thereof or in addition thereto, or within the territory as to which special limitations were imposed by chapter four hundred and fifty-two, of the acts of eighteen hundred and ninety-eight, as limited by chapter four hundred and fifty-five of the acts of nineteen hundred and twenty, chapter five hundred and forty-three of the acts of nineteen hundred and two, chapter four hundred and fifty-seven of the acts of eighteen hundred and ninety-nine or chapter four hundred and sixteen of the acts of nineteen hundred and seven or to a height greater than that limited in any restriction lawfully imposed by the park commissioners of said city.

[1923, c. 462, sect. 11.]

## SECTION 19.

### EXCAVATIONS.

All excavations shall so be protected, by sheet piling if necessary, by the persons causing the same to be made, that the adjoining soil shall not cave in by reason of its own weight. It shall be the duty of the owner of every building to furnish, or cause to be furnished, such support that his building shall not be endangered by any excavation; *provided*, that the owner of any building which is endangered by an excavation carried by an adjoining owner more than ten feet below the grade of the street may recover the expense so caused of supporting such building from the persons causing such excavation to be made. All permanent excavations shall be protected by retaining walls. In case of any failure to comply with the provisions of this section the commissioner may enter upon the premises and may furnish such support as the

Sect. 19.]

circumstances may require. Any expense so incurred may be recovered by the city from the persons required by law to furnish the support.

## SECTION 20.

## FOUNDATIONS OF BUILDINGS.

The foundation loads of every building, except temporary structure, shall be carried down to a satisfactory bearing material by means of properly designed walls, piers, grillages or piling which shall be so designed, located or otherwise disposed as to permit the entire loads which they transmit to be distributed over the bearing area with a unit intensity which shall not exceed the allowable value given in this section. The bearing area of any pile is the area over which it distributes its load.

The footing of every foundation shall be carried down at least four feet below any adjoining surface exposed to freezing and no footing shall be started on soil which is in a frozen condition. Foundations shall not be laid in freezing weather unless adequate precautions are taken against frost action.

For the purposes of this section "satisfactory bearing material" shall mean only ledge rock in its natural bed, natural deposits of sand, gravel or clay, and any combination of the foregoing materials which does not contain or does not overlie an appreciable amount of organic material.

In the absence of satisfactory tests of their sustaining power, the maximum allowable bearing values of the above materials shall be limited by the following unit pressures:—

	Tons per Square Foot.
Solid ledge rock . . . . .	100
Shale and hardpan . . . . .	10
Gravel, compact sand and hard yellow clay . . . . .	6

Sect. 20.]

	Tons per Square Foot.
Dry or wet sand of coarse or medium sized grains, hard blue clay mixed or unmixed with sand, dis- integrated ledge rock . . . . .	5
Medium stiff or plastic clay mixed or unmixed with sand, or fine grained dry sand . . . . .	4
Fine grained wet sand (confined) . . . . .	3
Soft clay protected against lateral displacement . . . . .	2
Fine grained wet sand (confined) . . . . .	3
Soft clay protected against lateral displacement . . . . .	2

*Definitions.*— (a) Solid ledge: Naturally formed rock, such as the granites and others of similar hardness and soundness, normally requiring blasting for their removal.

(b) Shale: Laminated slate or clay rocks removable with more or less difficulty by picking.

(c) Hardpan: A thoroughly cemented mixture of sand and pebbles or of sand, pebbles and clay, with or without a mixture of boulders and difficult to remove by picking.

(d) Gravel: A natural uncemented mixture of coarse or medium grained sand with a substantial amount of pebbles measuring one fourth of an inch or more in diameter.

(e) Sand (compact): Requiring picking for its removal.

(f) Sand (loose): Requiring shovelling only.

(g) Sand (medium grain): Individual grains readily distinguishable by eye though not of pronounced size.

(h) Sand (fine grained): Individual grains distinguished by eye only with difficulty.

(i) Hard clay: Requiring picking for its removal.

(j) Disintegrated ledge rock: Residual deposits of decomposed ledge.

(k) Medium clay: Stiff and plastic but capable of being spaded.

(l) Soft clay: Putty-like in consistency and changing shape readily under relatively slight pressure.

Sect. 20.]

*Note.*— The materials described in items *c, d, e, f, g, i, j, k*, shall be in relatively thick beds, if full loading value is used. Otherwise, if underlaid by a softer material, the value assigned to that material shall be used.

*When a Building Rests on a Ledge.*

Wherever a building or structure is to rest in part only upon solid ledge, the unit intensity of load upon the balance of the bearing area shall be not more than one half of the value given above for the several classes of soil.

Prior to the issuance of a permit for any permanent building or structure, the owner shall, by means of open pits or by test borings carried at least ten feet into a satisfactory bearing material other than ledge rock, determine the character and depth of the soil underlying the proposed site, and a certified copy of the report of all borings and test pits so taken, together with samples, taken dry, of the material selected for a foundation bearing shall be filed with the commissioner for his approval and classification. The number and location of borings taken, together with the method used in making and reporting them shall be as directed by the commissioner.

Foundations for first and second class buildings may be of brick, stone or concrete. The thickness shall be as stated in section twenty-three with the further provision that all foundation walls below grade shall be figured as retaining walls when they act as such.

Foundations of stone shall be of square split stone except that rubble stone shall be allowed under buildings outside of the building limits as they existed prior to September twenty-third, nineteen hundred and thirteen, but only when such buildings do not exceed forty-five feet in height and the foundation wall is less than ten feet in depth. No rubble foundation shall be less than



Sect. 20.]

twenty inches in thickness. All walls shall be properly bonded by through courses.

*Footings.*—The footings of foundation walls or piers shall consist of footing stones, concrete, reinforced concrete construction or steel grillages. Footings of wood construction may be used *provided* that they are to be entirely below the permanent ground water level.

*Footing Stones.*—Footing stones shall be at least ten inches in thickness. They shall be fully bedded upon the bearing soil.

*Concrete Footings.*—Concrete footings shall be not less than twelve inches in thickness. They may be either stepped or battered to meet the wall or pier which they support. The offset of each step or the angle of batter shall be such as not to exceed the allowable stresses in the concrete. If battered footings are used there shall be a squareshoulder at the base which shall be not less than four inches in height.

#### *Steel Grillage.*

Steel grillage foundations shall have at least six inches of concrete below and shall be entirely embedded in and surrounded by concrete at least four inches thick between steel and earth, and the concrete shall be no poorer than one part Portland cement and seven and one half parts aggregate, measured before mixing.

*Footing Loads.*—Provision shall be made in determining the required area of footings for safely supporting the full dead loads and the figured live loads on the lowest tier of columns, piers or walls, plus the weight of the footings themselves and such backfilling and overlying basement floor loads as may come vertically over the projecting spread of the footing.

*Foundation Piers and Caissons.*—The foundation of any building or structure may be carried down to ledge or other satisfactory bearing material by isolated piers of

Sect. 20]

approved masonry or by open or pneumatic caissons, so designed that the working stresses in the materials and on the soil do not exceed those established by this act.

[1918, c. 179, Sect. 8, Special Act:]

[1920, c. 91, Sect. 2.]

## SECTION 21.

### PILE FOUNDATIONS.

*General Requirements.*—The supporting value of piles shall be obtained from embedment in or bearing on material as firm as can practicably be obtained, and the method of driving shall be such as not to impair their strength. The frictional value observed in driving for that part of piles embedded in or passing through such materials as peat, silt, or fill overlying such materials, shall not be relied upon for support. No pile or group of piles shall be loaded eccentrically, except in cases where it is impracticable to avoid it. In such cases the unit stress allowable for piles shall not be exceeded. Any type of pile construction not provided for in this section shall meet such requirements as may be prescribed by the commissioner.

A detached column or pier footing supported by piling shall rest upon not less than three piles, but column or pier footings supported by proper and permanent masonry or steel construction which provides lateral support in all directions may each rest upon a single pile if the allowable load per pile is not exceeded. Light wall foundations may be supported by a single row of piles; *provided*, that the length of wall unsupported laterally by proper masonry or steel construction does not exceed ten feet. A light wall shall be known as that wall or walls of a building not in excess of one story and not exceeding twenty feet in height. All other foundation walls requiring piling shall rest upon at least two rows of piles, the rows to be at least two feet on centres for buildings up to thirty feet in height.

Sect. 21.]

For buildings exceeding thirty feet in height, if not more than two rows of piles are used, the rows shall be spread not less than three feet on centres.

Piles under masonry buildings shall be capped with concrete or with block granite. If capped with plain concrete the proportion shall be one part Portland cement to not more than seven and one half parts aggregate, and the capping shall be not less than sixteen inches high above the pile heads. All concrete capping shall fill the space between and around them for a depth of six inches and shall extend for not less than six inches beyond the outer edge of the pile cluster. No rubble concrete shall be used for pile capping. If capped with block granite, each block shall have a firm bearing on not less than three piles, shall be not less than twelve inches thick, and shall project sufficiently to cover fully all pile heads.

Piles supporting steel or wooden buildings without masonry walls or floors may be capped with timber not less than six inches thick, securely jointed together and to the piles.

The commissioner shall require additional piles to be driven for all piles which are broken, broomed or injured in any way, and for piles having a lower sustaining power than that required for the work.

The sustaining power of piles driven by jetting shall be determined by test loads as directed by the commissioner.

*Wooden Piles.*—Wooden piles shall be single sticks except as prescribed elsewhere, cut from sound live trees, shall be close grained and solid, free from defects, such as injurious ring shakes, unsound or loose knots, or decay, which may materially impair their strength or durability. Piles must be butt-cut above the ground swell and have a uniform taper from butt to tip.

*Short Bends not Allowed.*—A line drawn from the centre of the butt to the centre of the tip shall be within the body of the pile.

Sect. 21.]

All knots shall be trimmed close to the body of the pile. All piles shall be at least six inches in average diameter at tip under the bark.

*Inspection of All Piles.*— The commissioner shall require a competent inspector qualified by experience and training and satisfactory to him, to be on the work at all times while piles are being driven, and the inspector shall keep an accurate record of the length, size of tip and butt of each pile, the weight and fall of the hammer and the penetration of each pile for each of the last three blows.

Square timber of approved quality may be used as piling, in which case the average cross-section shall be not less than ten inches by ten inches, and the tip not less than six inches by six inches.

Pile heads shall be cut to sound wood before capping is placed.

*Loads on Wooden Piles.*— Wooden piles driven through fill, silt, peat or other soil incapable of adequately resisting lateral bending, to hardpan or ledge, or deriving their value from embedments of less than one twelfth their length in approved soil, shall be figured as columns, using the table for timber compression members, and using an area equal to the middle cross-section of the pile. All such piles shall be of hard wood such as oak, southern yellow pine or similar woods, if the commissioner shall so decide.

The safe load on all other wooden piles driven by drop hammer shall not exceed twelve tons each for spruce, Norway pine or other soft woods, nor fifteen tons each for southern yellow pine, oak or woods of similar strength, and shall be limited by the following formula: —

$$L = \frac{2 WH}{P \text{ plus } 1}$$

When testing for their value the pile head shall have sound wood and the fall of the hammer shall be ten feet.

Sect. 21.]

The safe supporting value of wooden piles when driven by single acting power hammer shall be limited by the following formula: —

$$L = \frac{2 WH}{P \text{ plus } 0.1}$$

In these formulas: —

L is the allowable load in pounds.

W is the weight of the hammer or striking parts in pounds.

H is the fall of the hammer in feet.

P is the average penetration in inches under the last three blows after the pile has been driven to a point where successive blows produce approximately equal or uniformly decreasing penetration.

The distance between wooden piles shall be not less than twenty-four inches on centres. The tops of all wooden piles shall be cut at an elevation not higher than grade 5.00, except that the commissioner may in his discretion permit a higher point of cut off, but not exceeding grade 9.00 in localities where the level of the ground water fluctuates with the tidal variations.

Wooden piles may be driven to a depth not exceeding ten feet below the ground surface by means of properly designed followers: *provided*, that such followers are constructed of steel or iron, and are equipped with a suitable cast iron or steel socket which encases the pile head sufficiently to avoid injury to them during the driving process. Before using such a follower the pile head shall be cut or trimmed so as to expose a sound section of timber on which the follower shall rest. If wooden driving blocks are inserted between the follower and pile hammer they shall be not more than twelve inches in height, of hard wood, and shall be replaced as often as their fibers become ruptured. In case followers are used, the sustaining value of the pile as determined by the driving formula shall be reduced twenty five per cent unless test loads are applied,

Sect. 21.]

in which case the commissioner may allow a higher unit loading not exceeding the maximum prescribed by this section.

### CONCRETE PILES.

*Pre-cast Concrete Piles.*—Pre-cast concrete piles shall be properly designed and reinforced to permit handling and driving without injury. The amount of longitudinal reinforcing employed shall be not less than two per cent nor more than four per cent, with bands or hoops not less than one fourth of an inch in diameter and spaced not further than ten inches. They shall be thoroughly cured before driving. The diameter or lateral dimension of such a pile shall be not less than eight inches at the point, and shall average not less than eleven inches. The length shall not exceed thirty times the average diameter when the pile is driven through fill, silt, peat or other material having relatively little lateral stiffness, to ledge or hardpan, or when it derives its value from embedment of less than one twelfth its length in approved soil, not forty times the average diameter in any case.

When driven to ledge or hardpan the allowable load on any such pile shall not exceed four hundred pounds per square inch on the concrete at the average cross section, and six thousand pounds per square inch on the longitudinal reinforcement.

All pre-cast concrete piles shall be protected against damage in driving by the use of a suitable cushion cap of approved design, and when driven to ledge shall be provided with a metal shoe having ample bearing surface.

*Cast in Place Concrete Piles.*—Concrete piles cast in place shall be so made and placed as to insure the exclusion of any foreign matter, and to secure a perfect full sized shape, and shall be spaced at least three feet, centre to centre, and more if the commissioner so decides. The average diameter of any such pile in place shall be not less

Sect. 21.]

than eleven inches, and the diameter of the tip shall be not less than eight inches. The length shall not exceed thirty times the average diameter when the pile is driven through fill, silt, peat or other material having relatively little lateral stiffness, to ledge or hardpan, or when it derives its value from embedment of less than one twelfth its length in approved soil, nor forty times the average diameter in any case. When driven to ledge or hardpan the allowable load on any such pile shall not exceed four hundred pounds per square inch on the concrete at the average section.

*General Provisions.*—Metal tubes five sixteenths of an inch thick or less, remaining in the ground, shall not be considered as reinforcement. To be considered as reinforcement, all steel rods shall be embedded in and covered by three inches of concrete.

The safe load for all concrete piles not driven to ledge shall be determined by the commissioner, who may, if he deems it necessary, require one or more tests of the same to be made at the expense of the owner of the proposed building or structure, or of the party causing the piles to be driven, but the commissioner shall not allow a greater load than one-half of the test load giving three eighths inch total settlement, such total settlement to remain constant for a period of twenty-four hours, nor shall the prescribed unit stresses be exceeded. Such tests shall be made under the supervision of the commissioner, and the results shall be filed in his office. No concrete pile shall be allowed a greater load than thirty tons in any case.

All load tests shall be conducted in accordance with regulations promulgated by the commissioner and to his satisfaction but in the absence of such regulations all load tests shall be in accordance with regulations formulated by the commissioner, and to his satisfaction, but in the absence of such regulations, they shall be continued until at least twice the working load allowed has

Sect. 21.]

been put upon the pile, and an accurate record shall be kept, to the nearest one sixteenth inch of settlement for and after each increment of load has been added. Increments of load shall not exceed ten thousand pounds each, and at least eight hours shall elapse between the addition of successive increments. Test loads shall be applied at capping grade.

All concrete for concrete piles shall be mixed in the proportion of one part Portland cement to not more than six parts of aggregate, and with a sufficient amount of water to produce a plastic or viscous consistency.

Concrete piles shall be capped with concrete masonry only.

[1918, c. 179, sect. 9, Special Act.]

[1923, c. 462, sect. 12.]

## SECTION 22.

### CELLARS — RAT-PROOFING.

*Cellars.*—The cellar of every building, where the grade or nature of the ground so requires, shall be sufficiently protected from water and dam by a bed at least two inches thick over the whole, of concrete, cement and gravel, tar and gravel, or asphalt, or by bricks laid in cement. No cellar or basement floor of any building shall be constructed below the grade of twelve feet above mean low water, unless such cellar is made waterproof. All metal foundations and all structural metal work underground shall be protected from dampness by concrete, waterproofed where necessary, or by other material approved by the commissioner.

*Rat-proofing.*—The cellar of every building hereafter erected within the building limits shall be made rat-proof by the use of masonry or metal. All openings in foundations, cellars and basements in such buildings, except for doors and hatchways, and except also for such windows



Sect. 22.]

wholly above ground as may be exempted by the commissioner in his discretion, shall be completely covered with screens of metal having meshes of not more than one half of an inch in least dimension and constructed of rods or wire of not less than twenty gauge.

[1918, c. 179, sect. 10, Special Act.]

## SECTION 23.

### THICKNESS OF WALLS.

#### *Basement Wall.*

For the purposes of this section a basement wall shall be construed to include any exterior wall between the ground and the first floor, and any party, fire and bearing walls from the top of foundations to the first floor.

The thickness of masonry walls shall be in all cases, irrespective of the requirements of this section, sufficient to keep the stresses in the masonry within the working stresses prescribed by this act.

#### *Single Family Dwellings.*

For single family dwellings not over three stories high with wooden floor beams spanning not more than fifteen feet, all exterior, party, bearing or fire walls shall be not less than twelve inches thick for basement walls and eight inches thick above the basement: *provided, however,* that the ends of floor timbers on opposite sides of wall in such buildings shall not be nearer than eight inches to each other.

#### *Dwellings Not More Than Three Stories and Twenty Feet Wide.*

For dwellings not over three stories high with floors spanning not more than twenty feet, all exterior walls shall be not less than twelve inches thick for basement walls and eight inches thick above the basement, and all

Sect. 23.]

party, fire and bearing walls shall be not less than twelve inches thick. In case any part of such a building is adapted for any use other than habitation all walls surrounding that part of the building shall be not less than twelve inches thick.

*All Other Dwellings, etc.*

For all other residences and for hotels, lodging houses, boarding houses, clubs, convents, hospitals, asylums and detention buildings, all exterior, party, fire and bearing walls above foundations shall have the following minimum thickness in inches:

STORIES.	Base-ment.	1.	2.	3.	4.	5.	6.	7.	8.
1 story building.....	12	12							
2 story building.....	12	12	12						
3 story building.....	12	12	12	12					
4 story building.....	12	12	12	12	12				
5 story building.....	16	12	12	12	12	12			
6 story building.....	16	16	12	12	12	12	12		
7 story building.....	16	16	16	12	12	12	12	12	
8 story building.....	20	16	16	16	12	12	12	12	12

*Other Than Dwellings.*

For all other buildings, exterior, party, fire and bearing walls above foundations shall have the following minimum thickness in inches:

STORIES.	Base-ment.	1.	2.	3.	4.	5.	6.	7.	8.
1 story building.....	12	12 <sup>1</sup>							
2 story building.....	12	12	12						
3 story building.....	16	12	12	12					
4 story building.....	16	16	12	12	12				
5 story building.....	16	16	16	12	12	12			
6 story building.....	20	16	16	16	12	12	12		
7 story building.....	20	20	16	16	16	12	12	12	
8 story building.....	20	20	20	16	16	16	12	12	12

<sup>1</sup> In case the floor area is less than 500 square feet, the wall thickness may be 8 inches.

Sect. 23.]

*Provided, however,* that if any part of any building is lower than the rest, the lower part may have walls of thicknesses required for a building of height equal to that of the lower part.

#### *Foundation Walls.*

The foundation walls shall be at least four inches thicker than the required thickness of the walls of the first story. The thickness herein given shall apply to all masonry walls unless they are reinforced by a frame or skeleton of steel or reinforced concrete.

#### *Mezzanine Floor or Balcony.*

For the purposes of this section any balcony or mezzanine floor of more than ten feet span shall be considered as forming a story in fixing the thickness of the walls which support it.

#### *Ashlar.*

In reckoning the thickness of walls, ashlar shall not be considered unless the walls are at least sixteen inches thick and the ashlar is at least eight inches thick, or unless alternate courses are at least four and eight inches to allow bonding with the backing. Ashlar shall be held by metal clamps to the backing or be properly bonded to the same.

#### *Non-bearing Walls — Thickness.*

Non-bearing walls not used for fire or party walls may be four inches less in thickness than is required by the preceding tables; and such walls supporting stairs or stair landings may be eight inches less: *provided, however,* that no such non-bearing or stair wall shall be less than eight inches thick nor have a greater height unstayed laterally than thirty times its thickness, except with the approval of the commissioner.

Sect. 23.]

*Curtain Walls.*

Curtain walls between columns, buttresses or projecting piers may be thinner than is required by the preceding tables: *provided, however*, that in single family houses not over three stories high such curtain walls shall be not less than four inches thick, and in all other buildings such curtain walls shall be not less than twelve inches thick for fire or party walls nor less than eight inches thick for exterior walls, except that the parts between the top of one window opening and the bottom of the window opening above, if faced with metal, shall be backed by at least four inches of incombustible material. No curtain wall exceeding twenty feet in length shall have a greater height unstayed laterally than thirty times its thickness.

*Hollow Block Walls.*

Hollow block walls shall have the same minimum thickness as is required for brick walls, but shall not be used for exterior walls in buildings over three stories high, nor in party walls over two stories high. Solid unreinforced concrete walls shall have the same minimum thickness as required for brick walls. Reinforced concrete walls shall be of the thickness and construction required by the commissioner, subject to the requirements of section fifteen and all acts in amendment thereof and in addition thereto. Hollow terra-cotta building blocks may be used in external and bearing walls other than party walls for buildings not over four stories high.

[1918, Special Act, c. 179, sect. 11.]

[1923, c. 462, sect. 13.]

## SECTION 24.

## ANCHORS.

All walls of a first or second class building meeting at an angle shall be securely bonded, or shall be united every

Sect. 24.]

five feet of their height by anchors made of at least two inches by half an inch of steel or wrought iron, well painted, and securely built into the side or partition walls not less than thirty-six inches, and into the front and rear walls at least one half the thickness of such walls.

## SECTION 25.

### BRICKWORK — BONDING.

Every eighth course, at least, of a brick wall shall be a full heading or bonding course, except where walls are faced with face brick, in which case in every eighth course at least every other brick shall be a full header. No diagonal header ties shall be used.

In a skeleton frame building brick facing of not more than four inches in thickness may be bonded to the frame by metal ties if other suitable precautions satisfactory to the commissioner are taken. Such ties shall be of galvanized wire or other suitable material satisfactory to him.

[1918, Special Act, c. 179, sect. 12.]

## SECTION 26.

### VAULTED WALLS.

If the air spaces are headed over and the walls are built solid for at least three courses below the floor and roof beams, walls, if of brick, may be built hollow. They shall contain, exclusive of withes, the same amount of material as is required for solid walls, and the masonry on the inside of the air space in walls over two stories in height shall be not less than eight inches thick, and the parts on either side shall be securely tied together with ties not more than two feet apart in each direction.

## SECTION 27.

## WALLS FRAMED WITH IRON OR STEEL.

Walls may be built in part of iron or steel or with a reinforced concrete or metal framework. In such metal framework the beams and girders shall be riveted to each other at their respective junction points. If columns made of rolled iron or steel are used, their different parts shall be riveted to each other, and the beams and girders resting upon them shall, if possible, have riveted connections to unite them with the columns. If cast iron columns are used, each successive column shall be bolted to the one below it by at least four bolts not less than three fourths of an inch in diameter, and the beams and girders shall be bolted to the columns. At each line of floor or roof beams, lateral connections between the ends of the beams and girders shall be made in such manner as rigidly to connect the beams and girders with each other in the direction of their length.

## SKELETON PARTY WALLS.

All party walls of skeleton construction shall have curtain walls of solid brick, not less than twelve inches thick in buildings over two stories high.

All outside walls of skeleton construction shall have curtain walls which may be of masonry terra-cotta, concrete, or reinforced concrete, constructed and supported under such conditions as the commissioner shall prescribe.

If the metal or other frame work is so designed that the enclosing walls do not carry the weight of floors or roof, then the walls shall be of masonry or concrete construction and shall be thoroughly anchored to the iron skeleton, and whenever the weight of such walls rests upon beams or columns, such beams or columns shall be made

Sect. 27.]

strong enough in each story to carry the weight of wall resting upon them without reliance upon the walls below them.

[1923, c. 462, sect. 14.]

## SECTION 28.

### PARTY WALLS ABOVE ROOF.

In buildings less than forty-five feet in height all party walls shall be built to a height at least twelve inches above the roof covering and shall be capped with stone, cement or metal securely fastened to the masonry. In all other buildings such walls shall be carried thirty inches above the roof.

## SECTION 29.

### WALLS — CORNICES.

Where a wall is finished with a stone cornice, the greatest weight of material of such cornice shall be on the inside of the face of the wall. All cornices of second class buildings shall be of brick or covered with fireproof material and the walls shall be carried up to the boarding of the roof; and where the cornice projects above the roof the masonry shall be carried up to the top of the cornice and covered with metal, like parapet walls.

## SECTION 30.

### PIERS AND HEARTHES.

Piers and walls shall have caps or plates, where they are needed, sufficient properly to distribute the load.

Hearths shall be supported by trimmer arches of brick or stone; or shall be of single stones at least six inches thick, built into the chimney and supported by iron beams, one end of which shall be securely built into the masonry of a chimney or of an adjoining wall, or which shall other-

Sect. 30.]

wise rest upon an incombustible support. Brick jambs of every fireplace, range or grate opening shall be at least eight inches wide each, and the backs of such openings shall be at least eight inches thick. Hearths and trimmer arches shall be at least twelve inches longer on either side than the width of such openings, and at least eighteen inches wide in front of the chimney breast. Brickwork over fireplaces and grate openings shall be supported by proper iron bars, or brick or stone arches.

### SECTION 31.

#### WALLS — DOORWAYS IN PARTY WALLS.

Openings for doorways in party walls shall not exceed one hundred square feet each in area, and each opening shall have two sets of fire doors separated by the thickness of the wall, hung in a manner satisfactory to the commissioner, except that the aggregate width of all openings in any story shall not exceed fifty per cent of the length of the wall in which such openings occur. Openings, not exceeding one hundred and forty-four square inches, constructed and protected as shall be approved by the commissioner, may be permitted in any wall or floor.

[1923, c. 462, sect. 15.]

### SECTION 32.

#### FIRE PROTECTION.

All structural metal supporting or forming part of the frame, floors, roof or columns of any building, except as otherwise exempted in this act, shall be protected against the effect of heat. The commissioner may in respect to radio towers waive the provisions of this section.

Protection shall consist of:—

(a) *Concrete.*— Cast in forms around and in direct contact with the structural members and reinforced with



Sect. 32.]

iron or clamps or hangers or with wires in such a manner as to form a thorough bond. Concrete filling may be deemed protection for the upper flanges where arch construction is used;

(b) *Terra Cotta*.—Clamped in place with steel clamps or wrapped securely with number twelve galvanized iron wire or metal lath in such manner as to hold each block in place, set in mortar no poorer than one part natural cement and two parts sand and (except where arches abut) plastered with the same mortar at least one half inch thick, and at least thick enough to make the entire protection as thick as required in paragraph three. Terra cotta blocks may be hollow but each face shall be solid, and no shell or web shall be less than three quarters inch thick;

(c) *Brickwork*.—Set in cement mortar;

(d) Any material or form of construction that will resist the action of flames and a heat of seventeen hundred degrees Fahrenheit for at least two hours without raising the temperature of the material to be protected above five hundred and fifty degrees Fahrenheit, through a thickness of two inches, as determined by fire and water tests for fireproofing construction adopted by the American Society for Testing Materials.

This protection shall be, unless it is otherwise provided herein, at least three quarter inch thick and at least of the thickness named in the following table:—

On columns carrying masonry walls:—

One and one half inches against the edges of flanges;  
Four inches elsewhere.

On columns carrying floors or roofs or both:—

One and one half inches against the edges of flanges;  
Three inches elsewhere.

Sect. 32.]

On beams, girders or trusses carrying masonry walls:—

One inch on top;

Two inches elsewhere.

On beams, girders, or trusses carrying floors or roofs or both:—

One inch on top;

One and one half inches elsewhere.

On beams deeper than fifteen inches or having a flange width of more than seven and one half inches:—

One inch on top;

Two inches elsewhere.

On lugs, brackets, braces and similar minor construction members and beyond the tips of rivets:—

Three quarters of an inch.

#### *Exterior Isolated Columns.*

About isolated columns on the exterior of buildings, the thickness of protection may be reduced to one inch, when the same is covered with an outer shell of cast iron or steel, except that for isolated columns on the exterior of one story buildings fire protection may be omitted.

#### *Plaster on Metal Lath Not Fire Protection for Steel or Iron.*

Plaster on metal lath shall not be considered as a fire protection for steel or iron structural members, except that where suspended ceilings of metal lath and plaster leave not less than one inch of air space against the protective covering of such structural member, the protective covering may be one inch in thickness.

Metal lath and plaster used for the requirements of this section shall have a total thickness, not counting clinches, of not less than three quarters of an inch.

#### *Pipes, etc., Not to be Embedded.*

No pipes, wires, cables or other material shall be embedded in the required fireproofing of columns or other structural members.

Sect. 32.]

The above requirements as to fire protection shall not apply in the following cases:—

(a) Structural metal in second or third class buildings in any case in which wood without fire protection would be permissible under this act.

(b) Structural metal which faces on enclosed spaces that are strutted up or hung down from floors or roofs where the tops, bottoms and walls or partitions of such spaces are protected against fire on the outer side, as required elsewhere in this act.

(c) Lintels under stone or brick unless over ten feet span.

(d) Buildings built in whole or in part of a better class of construction than is required by this act shall be required to have only such protection for structural metal as would be required in a building of the type that would be allowed in the given case.

(e) Metal work in a nonbearing partition, and for furrings and metal used only to support finish or equipment, and for metal of stair construction, suspension rods for balconies, steel work of theatre stages, fly galleries and rigging lofts.

(f) Metal, *other than columns*, carrying no other loads than ceilings, or suspended balconies not over eight feet wide. When a suspended ceiling is used it shall be of metal lath and plaster with hanging rods, ties stiffening, and the like, of metal.

*Alterations — Fireproofing to be Satisfactory to Commissioner.*

In work in connection with alterations of existing buildings, the character and amount of protection for steel and iron work shall be made satisfactory to the commissioner.

Whenever any protective material or structural metal is, in the opinion of the commissioner, liable to injury by

Sect. 32.]

trucks or merchandise, wood or metal guards shall be applied as he may require.

#### *Firestopping in Third Class Buildings.*

In buildings of third class construction the exterior walls at each floor level, and all spaces between joists over girders and bearing partitions, and from plate to roof boarding, shall be firestopped with masonry or metal or other material satisfactory to the commissioner.

#### *Firestopping in Second Class Buildings.*

In buildings of second class construction spaces between strap furring on brick walls shall be filled for a distance of five inches below and five inches above the floor beams with mortar, and all spaces between joists over girders and bearing partitions, and from plate to roof boarding shall be firestopped with masonry not less than four inches thick.

#### *Roof, Stairway and Chimney Firestopping.*

In buildings of second or third class construction spaces between rafters, over furring enclosing spaces under the roof, shall be firestopped with wood or metal, and spaces between stringers of stairs and joists of landings, unless stairs are unceiled or of incombustible materials, shall be firestopped with masonry or metal or not less than seven eighths of an inch of wood, at least twice in each flight of stairs. All spaces around chimneys shall be thoroughly firestopped with sheet metal, metal lath and plaster, or masonry.

#### *Firestopping — How Applied.*

Firestopping shall completely fill all openings where it is applied; all chases or enclosures for pipes shall be fire-

Sect. 32.]

stopped adjacent to other required firestopping and by the same materials, except that metal lath and plaster may be used.

#### *Rat-proofing.*

No building operations shall be permitted which will create unnecessary permanent spaces where rats will find refuge from their enemies and breed.

#### *Firestopping Floors.*

In every building of second or third class construction each floor shall be thoroughly stopped by a continuous layer of asbestos fabric, magnesocalcite or other fire-resisting material approved by the commissioner.

*Furnaces and Smoke Pipes.*—The tops of all heating furnaces and smoke pipes shall be at least one foot below the nearest wooden beams or ceilings. All ceilings immediately over a furnace or boiler, and for six feet on each side thereof, and all ceilings over indirect radiators shall, except under fireproof floors, be metal-lathed and plastered.

*Register Boxes.*—All hot-air register boxes in the floors or partitions of buildings shall be set in soapstone or equally fireproof borders and not less than two inches in width, shall be made of tin plate and shall have double pipes and boxes properly fitted to the soapstone. Hot-air pipes and register boxes shall be at least one inch from any woodwork, and register boxes shall be fifteen inches by twenty-five inches or larger, and their connecting pipes shall be two inches from any woodwork. If indirect hot water or indirect steam heat is used, the commissioner may modify or dispense with the foregoing requirements.

*Vent and Smoke Pipes.*—All vent or smoke pipes for stoves, furnaces or heaters, not including gas stoves, hereafter installed shall be placed not nearer than twelve

Sect. 32.]

inches to any lath, plaster or board partition, ceiling or woodwork. Where such pipes pass through a lath and plaster or board partition, they shall be protected by ventilated metal collars at least six inches larger in diameter than the pipe. Where such pipes enter the chimney, the opening into the same shall be protected by a metal collar built at least four inches into the brickwork of the chimney. No such pipe shall pass through the roof or exterior wall of any building. Such pipes when within eighteen inches of a ceiling shall be protected by having the ceiling over them, and at least two feet wide, wire-lathed and plastered, or by having a shield of metal of the same width hung from the floor timbers, and at least six inches distant therefrom. Vent pipes to gas stoves, if placed nearer than three inches to any woodwork or lath and plaster partition, shall be protected with incombustible material.

[1914, c. 782, sect. 5.]

[1918, c. 179, sect. 13, Special Act.]

[1921, c. 60, sect. 2.]

[1923, c. 462, sect. 16.]

[1924, c. 335, sect. 4.]

## SECTION 33.

### FIREPROOF PARTITIONS.

Except as is otherwise provided in this section, partitions in buildings of first class construction shall be constructed of the materials and in the manner herein specified:—

(a) Brick in cement mortar;

(b) Concrete, consisting of one part Portland cement, and not more than three parts of sand and six parts of stone or gravel, not less than three inches thick if properly reinforced with steel, nor less than four inches thick otherwise;

Sect. 33.]

(c) Cinder concrete, consisting of one part Portland cement and not more than three parts of sand and six parts of cinders, not less than four inches thick if properly reinforced with steel, nor less than five inches thick otherwise;

(d) Hollow terra cotta blocks, laid in cement mortar, not less than three inches thick;

(e) Hollow concrete blocks, of either stone or cinder concrete laid in cement mortar, not less than three inches thick;

(f) Solid or hollow blocks consisting of gypsum containing not more than twenty-five per cent by weight of cinders, asbestos fiber, wood chips or vegetable fiber, laid in gypsum plaster or cement mortar tempered with lime, not less than three inches thick;

(g) Metal lath on a steel studding covered with Portland cement mortar or gypsum plaster, of a finished thickness of not less than two inches in the case of solid partitions, nor less than three inches in the case of hollow partitions; or

(h) Any material or form of construction that may be approved by the commissioner if conforming to the requirements of the fire test hereinafter prescribed. But nothing in this section shall prevent the erection, in the discretion of the commissioner, of partitions of pressed metal and glass or of temporary partitions of wood and glass within rooms or spaces enclosed by fireproof partitions or walls.

The thicknesses as above described are for partitions up to fifteen feet in height, and they shall be increased in thickness one inch for every additional eight feet or fraction thereof. If partitions are not plastered on both sides, the thicknesses shall be one inch greater than those above specified.

*Fireproof Partition Support.*

*Construction.*— Unless built as approved masonry walls, partitions in fireproof buildings shall be independently supported at each floor. They shall be keyed, or otherwise securely fastened to the ceilings, and, when necessary, shall be stiffened with suitable steel uprights securely fastened to floor and ceiling. Partitions enclosing hallways or toilet rooms and other permanent partitions shall not rest on wood flooring but shall start on the fireproof construction of the floor. In the upper story, where there is a space between the ceiling of the top floor and the roof, partitions need not extend above the ceiling.

*Tests of Fireproof Partitions.*— In testing the fireproof qualities of any partition construction, a vertical panel not less than fourteen feet long and nine feet high shall be subjected to a continuous fire for not less than one hour at an average temperature of seventeen hundred degrees Fahrenheit, during the latter half hour, followed by an application for not less than two and one half minutes of a hose stream from a one and one eighth inch nozzle at thirty pounds nozzle pressure, without the passage of flame during the test.

[1918, c. 179, sect. 14, Special Act.]

## SECTION 34.

## TIMBERS IN WALLS OF SECOND CLASS BUILDINGS.

The ends of all wooden floor or roof timbers in second class buildings shall enter the wall to a depth of at least four inches; and the ends of all such beams shall be so shaped or arranged that in case of fire they may fall without injury to the wall.

[1918, c. 179, sect. 15, Special Act.]



## SECTION 35.

## ALTERATION OF EXISTING BUILDINGS.

Any building, except those of third class construction within the building limits, having not more than five floors above the mean grade of all the sidewalks, and covering an area of not more than seventeen hundred and fifty square feet, may be altered, remodelled or enlarged for use as a house for habitation or tenements using second class construction.

The first story or basement, or both the first story and basement of second and third class buildings may be used for mercantile purposes; *provided*, that the walls and ceiling surrounding the mercantile portion are firestopped as follows: The ceilings and exterior or party walls are to be wire lathed and cement plastered with three coats of cement plaster. The partitions surrounding the mercantile portion are to be firestopped full height between the studs with brick, terra cotta, or gypsum laid in cement and covered on both sides with metal lath and cement plaster three coat work. Any openings in these surrounding partitions are to be protected by metal covered self-closing doors.

## HEIGHT ALLOWED.

The height of any such building shall not be increased unless the walls and foundations conform to the provisions of this act. The number of stories of such a building shall not exceed five above the cellar or basement.

## EGRESS REQUIRED.

Every such building, except a single family dwelling, more than three stories in height so altered, remodelled or enlarged, shall be provided with at least two indepen-

Sect. 35.]

dent means of egress, at least one of which shall consist of an inside stairway, enclosed with partitions of wood studding, the spaces between the studs filled solid to full height with bricks, terra cotta or gypsum blocks, laid in mortar, and both sides of partitions and soffits of stairs plastered with three coats of cement plaster on metal lath, or any enclosure of superior fire-resisting construction, satisfactory to the commissioner, all openings into said enclosure to have self-closing fireproof doors and fireproof frames. The other means of egress may be outside iron fire escape with stairs to the ground, or connecting iron balconies to an adjoining building, and each tenement above the first story shall have direct access to at least two separate means of egress.

#### EXPOSURE REQUIRED.

Every such building, so altered, remodelled or enlarged, shall have, in addition to the exposure on the widest street, an exposure as long as the average width of the building, upon a space open from the ground to the sky, at least ten feet wide for the first three stories, and increasing in width five feet for the next two stories. If the proposed building is more than five stories in height, said space shall be twenty feet; *provided*, that if the basement and first story are adapted or enlarged for use for mercantile purposes the exposure required by this section shall not apply to that part of the building; and *provided, also*, that sufficient space be retained on the lot for the storage of ashes or garbage.

Such exposure may be either upon private or public ways, or upon land which is dedicated for the use of the building, and may be divided and placed as approved by the building commissioner.

These spaces shall remain undiminished so long as the building is used for habitation.

If the building is situated on the corner of streets or

Sect. 35.]

private ways not less than ten feet wide the commissioner may approve the omission of the whole or part of this additional exposure.

#### ALTERATION — WHEN IT PRODUCES NEW STRUCTURE PRACTICALLY.

If in the opinion of the commissioner the alteration proposed to be made in a building is of such extent as, when done, to produce a practically new structure or to impair the stability or increase the fire risk of the structure as a whole, then the whole structure shall be made to conform to the provisions of this act for a new structure of the same class. A building damaged by fire or other casualty may be repaired or restored so as to conform to its original condition, or may be reconstructed in some or all of its parts, so as to conform to the requirements of this act for new buildings, as the commissioner may specify in his permit.

#### WINDOWS IN LIVING ROOM.

Every living room in a building adapted for habitation shall have a window on the open air of an area not less than ten square feet and distant in a three story building not less than six feet from any opposite wall or lot line; distant in a four story building not less than eight feet from any opposite wall or lot line; distant in a five story building not less than ten feet from any opposite wall or lot line. This shall not apply to the construction of third class buildings, except the provision for a window on the open air of an area as above provided.

#### EXPOSURE REQUIRED.

New buildings for habitation or tenement purposes of not more than seventeen hundred and fifty square feet area, may be built of second class construction with the same restrictions as required by the preceding paragraphs

Sect. 35.]

of this section referring to the alteration, remodelling and enlarging of second class buildings. The exposure required under this section shall apply to all such buildings hereafter constructed and adapted for habitation.

[1921, c. 289, sect. 3.]

[1923, c. 462, sect. 17.]

[1924, c. 335, sect. 5.]

SECTION 36.

LOADS.

Dead loads shall consist of the weight of walls, floors, roofs, and permanent partitions. The weights of various materials shall be assumed as follows:

	Pounds per Cubic Foot.
Beech . . . . .	42
Birch . . . . .	42
Brickwork . . . . .	120
Concrete, cinder, structural . . . . .	108
Concrete, cinder, floor filling . . . . .	96
Concrete, stone . . . . .	144
Douglas, fir . . . . .	36
Granite . . . . .	168
Granolithic surface . . . . .	144
Limestone . . . . .	150
Maple . . . . .	42
Marble . . . . .	168
Oak . . . . .	48
Pine, southern yellow . . . . .	42
Sandstone . . . . .	144
Spruce . . . . .	30
Terra cotta, architectural, voids unfilled . . . . .	72
Terra cotta, architectural, voids filled . . . . .	120
	Pounds per Square Foot.
Gravel or slag and felt roofing . . . . .	6
Plastering on metal lath, exclusive of furring . . . . .	8

[1921, c. 289, sect. 3.]

Sect. 36.]

## LIVE LOADS.

Live loads shall include all loads except dead loads. Every permit shall state the purpose for which the building is to be used, and all floors and stairs shall be of sufficient strength to bear safely the weight to be imposed thereon in addition to the dead load, but shall safely support a minimum uniformly distributed live load per square foot as specified in the following table:

CLASS OF BUILDING.	Pounds per Square Foot.
Armories, assembly halls, and gymnasiums.....	100
Fire houses:—	
Apparatus floors.....	150
Residence and stable floors.....	50
Garages, private, not more than two cars.....	75
Garages, public.....	150
Grandstands.....	100
Hotels, lodging houses, boarding houses, clubs, convents, hospitals, asylums and detention buildings:—	
Public portions.....	100
Residence portions.....	50
Manufacturing, heavy.....	250
Manufacturing, light.....	125
Office buildings:—	
First floor.....	125
All other floors.....	60
Public buildings:—	
Public portions.....	100
Office portions.....	75
Residence buildings, including porches.....	50
Schools and colleges:—	
Assembly halls.....	100
Class rooms never to be used as assembly halls.....	50
Sidewalks.....	250
(Or eight thousand pounds concentrated, whichever gives the larger moment or shear.)	
Stables, public or mercantile:—	
Street entrance floors.....	150
Feed room.....	150
Carriage room.....	50
Stall room.....	50
Stairs, corridors, and fire escapes from armories, assembly halls and gymnasiums.....	100
Stairs, corridors, and fire escapes except from armories, assembly halls, and gymnasiums.....	75
Storage, heavy.....	250
Storage, light.....	125
Stores, retail.....	125
Stores, wholesale.....	250

Sect. 36.]

The commissioner may require design for heavier loads than the above minimum values, if, in his judgment, the purpose of the building or vibrating machinery requires it. For buildings or structures not included in the above table, the commissioner shall establish allowable live loads.

*Allowable — Maximum Loads Imposed.*

The commissioner may prescribe the maximum loads which may be imposed upon the floors of existing buildings.

*Change of Occupation — Permit Required.*

No use or occupation of a building or part of building for a purpose other than that for which it was originally built and designed to be used, and no change in the use or occupation of a building or part thereof which will increase the floor load beyond the capacity prescribed for such use and occupation shall be made unless, upon application therefor, the commissioner shall issue a permit on condition that the proposed use will not endanger the safety of the building or the health or the safety of the occupants thereof.

*Floor Loads to be Posted.*

Before any building hereafter erected is occupied, in whole or in part, as a business building, and before any building already erected but not previously occupied as a business building, is occupied or used, in whole or in part, for that purpose, and whenever, for any reason, the commissioner shall prescribe the load for an existing building or part thereof, the safe live load for each floor, or portion of each floor as approved by the commissioner, shall be marked on metal plates, of character approved by him, which shall be supplied and securely affixed by the owner of the building in a conspicuous place in the

which they relate. It shall be the duty of the occupants of the building to maintain such plates during occupancy, and the owner of the building or his agent shall cause the same to be properly affixed with each change of occupancy. No person shall place or cause or permit to be placed on any floor of any building any greater load than the approved safe load.

*Slab, Arch and Beam to Have Sufficient Strength to Bear Live and Dead Load.*

Every plank, slab and arch, and every floor beam carrying one hundred square feet of floor or less, shall be of sufficient strength to bear safely the combined dead and live load supported by it, but the floor live loads may be reduced for other parts of the structure as follows:

*Live Load Reductions.*

In all buildings except armories, garages, gymnasiums, storage buildings, wholesale stores, and assembly halls, for all flat slabs of over one hundred square feet area, reinforced in two or more directions and for all floor beams, girders, or trusses carrying over one hundred square feet of floor, ten per cent reduction.

For the same, but carrying over two hundred square feet of floor, fifteen per cent reduction.

For the same, but carrying over three hundred square feet of floor, twenty-five per cent reduction.

These reductions shall not be made if the member carries more than one floor and therefore has its live load reduced according to the table below.

In public garages, for all flat slabs of over three hundred square feet area reinforced in more than one direction, and for all floor beams, girders and trusses carrying over

Sect. 36.]

three hundred square feet of floor, and for all columns, walls, piers, and foundations, twenty-five per cent reduction.

In all buildings except storage buildings, wholesale stores, public garages and office buildings, for all columns, girders, trusses, walls, piers, and foundations.

Carrying one floor . . .	No reduction.
Carrying two floors . . .	Twenty-five per cent reduction.
Carrying three floors . . .	Forty per cent reduction.
Carrying four floors . . .	Fifty per cent reduction.
Carrying five floors . . .	Fifty-five per cent reduction.
Carrying six floors or more,	Sixty per cent reduction.

For office buildings only:

Carrying one floor . . .	No reduction.
Carrying two floors . . .	Ten per cent reduction.
Carrying three floors . . .	Twenty per cent reduction.
Carrying four floors . . .	Thirty per cent reduction.
Carrying five floors . . .	Forty per cent reduction.
Carrying six floors or more,	Fifty per cent reduction.

### *Roof Loads.*

Roofs shall be designed to support safely minimum live loads as follows:—

Roofs with pitch of four inches or less per foot, a vertical load of forty pounds per square foot of horizontal projection applied either to half or to the whole of the roof.

Roofs with pitch of more than four inches and not more than eight inches per foot, a vertical load of fifteen pounds per square foot or horizontal projection and a wind load of ten pounds per square foot of surface acting at right angles to one slope, these two loads being assumed to act either together or separately.



Sect. 36.]

Roofs with pitch of more than eight inches and not more than twelve inches per foot, a vertical load of ten pounds per square foot of horizontal projection and a wind load of fifteen pounds per square foot of surface acting at right angles to one slope, these two loads being assumed to act either together or separately.

Roofs with pitch of more than twelve inches per foot, a vertical load of five pounds per square foot of horizontal projection and a wind load of twenty pounds per square foot of surface acting at right angles to one slope, these two loads being assumed to act either together or separately.

All buildings and structures shall be calculated to resist a pressure per square foot on any vertical surface as follows:—

For forty feet in height . . . . .	Ten pounds.
Portions from forty to eighty feet above ground . . . . .	Fifteen pounds.
Portions more than eighty feet above ground . . . . .	Twenty pounds.

#### *Wind Pressure.*

But the commissioner may require a building or structure to be designed for larger pressure than the pressures given in the table, if, in his judgment, the exposure requires it.

If the resisting moments of the materials of construction are not sufficient to resist the moment of distortion due to wind pressure without exceeding the stresses allowed in this act, additional bracing shall be introduced to supply the deficiency in the moment.

[1914, c. 595.]

[1918, c. 179, sect. 16, Special Act.]

[1923, c. 462, sect. 18.]

[1924, c. 414.]

## SECTION 37.

## SHUTTERS.

In all first or second class mercantile or manufacturing buildings over thirty feet in height outside openings in party walls, or in any rear or side wall within twenty feet of an opposite wall or buildings, shall have metal frames and sashes glazed with wire glass or shall be protected by shutters. Such shutters shall be covered on both sides with tin or shall be made of other substantial fireproof material, and hung on the outside, either upon independent metal frame or upon metal hinges attached to the masonry, and shall be made to be handled from the outside, and one such shutter in each room shall have a protected hand-hole eight inches in diameter.

[1923, c. 462, sect. 19.]

## SECTION 38.

[See also Elevator and Escalator Regulations Issued by Dept. of Public Safety, State House.]

## ELEVATORS.

*Shafts.*

Elevators and hoists for freight which do not run above the first story may be constructed without fireproof enclosures. Freight and passenger elevators may be placed in areas or hallways where the same are continuous and unbroken, such elevators to be protected by metal grille. Except as above provided, all shafts for elevators, hoists, dumb-waiters, lifts and shafts used for lighting and ventilating or other air ducts shall be constructed of incombustible materials; provided that in second and third class buildings not over four stories high the shafts may be constructed with wood studding, the space between the studs filled solid the full height with brick, terra cotta or gypsum block laid in mortar and plastered on both sides with at least three coats of cement plaster on metal lath. The bottom of all shafts shall be fire protected. All

[See c. 782 of 1914 on page 245.]

Sect. 38.]

windows, or ceiling lights opening into such shafts shall have metal or metal covered fireproof frames and sash glazed with wire glass and arranged to close automatically in case of fire. Such shafts shall be carried at least three feet above the adjoining roof and there covered with a skylight, providing opening of a total area equal to the area of the shaft and glazed with hammered or ribbed glass, protected by wire screens on metal supports.

#### *Gates, Rails, Trap Doors.*

Every opening into a shaft or hoistway shall be protected by self-closing gates, rails, trap-doors, or other equivalent devices.

#### *Safety Device.*

Every elevator shall be provided with a safety attachment to prevent the falling of the car. The machinery over the elevator shall have underneath it a grille sufficient to protect the car from falling material.

Every opening into an elevator shaft or hoistway and every opening through a floor, other than a stairway, shall be closed when not in use.

#### *Outside Windows on Shafts.*

All elevator shaft openings, other than openings into passenger elevator shafts, shall be furnished with metal covered or incombustible doors, hung in a manner satisfactory to the commissioner, and shall be provided with iron threshold. Wire glass panels may be used in such doors. Outside windows or openings of every elevator shaft shall have three vertical iron rods, painted red, equally spaced off in such window or opening.

#### *Danger Signal.*

Freight elevators shall be equipped with a suitable danger signal to warn people of the approach of the elevator.

Sect. 38.]

The space between the car and door of each landing shall be not more than two inches.

No elevator shall be used in any building until the same is approved in writing by the commissioner.

*Prohibition of Use.*

In case any freight or passenger elevator is not constructed or furnished in compliance with this act, or has become unsafe, the commissioner shall post a conspicuous warning and prohibition at each entrance to such elevator. It shall thereafter, until a new written permit is given by the commissioner, be a penal offence hereunder to operate the said elevator, or to remove or deface the said notice.

*Recess in Wall Prohibited.— Platforms — Outside Openings.*

Freight elevator wells hereafter built on the line of the external wall of a building shall be so constructed that there shall be no recess in the outer wall along the whole line of the same, and that no more than four inches space shall be allowed between the platform of the car and the outer wall. The side of the platform and the line of the door-way shall be flush with the well-way, and the door openings from the said elevator well into the building shall be placed at least six inches back from the face of the well, so as to allow space enough for self-closing gates to operate between the door and the well opening. Outside openings to freight elevators shall be protected by self-closing slatted gates, "vertical," with spaces not wider than two inches between the slats.

*Speed Limit.*

All elevators running at a speed of more than one hundred feet a minute, shall be operated by competent persons not less than eighteen years of age, and no other person shall operate or have the care or charge of such an elevator.

Sect. 38.]

*Age of Operator.*

No elevator shall be operated by or placed in charge of any person under sixteen years of age.

*Plans and Permit Required.*

No elevator shall hereafter be installed in any building without a permit having been granted therefor, and the applicant shall submit a plan showing the proposed location of the shaftway, the area and situation of the machine room, and the said plan shall be filed as part of the records of the department. All elevators hereafter installed shall be located so as to give easy and safe access to all the principal parts of the machinery for inspection and repairs.

*Overspeed Governor.*

All passenger elevators hereafter built, operated by drum and cables, shall have an overspeed governor to prevent the car from descending at overspeed, and all passenger and freight elevators shall have a slack cable device to stop the machinery in case the car is held up or the cables part.

*Accident to be Reported.*

If any accident shall occur to any elevator affecting life or limb or damaging any part of the machinery or running parts of the elevator, it shall be the duty of the engineer or superintendent in charge immediately, before any repairs are made, or any broken pieces are removed, to notify the commissioner of the accident, before the elevator is operated again, so that the cause of the accident may be determined, any faulty construction remedied, and satisfactory repairs made.

All elevator cables hereafter installed that pass through bevelled sockets, the ends returning and refitting into the

Sect. 38.]

same, shall have in addition lead or babbitt metal poured into the ends of the socket, to prevent the possibility of the cable's slipping.

#### *Manufacturers to Test Safety Devices.*

All manufacturers of elevators shall be required to test, in the presence of an inspector, the safety devices of every elevator installed before the same is turned over to the owners for use, and the commissioner shall be notified by the manufacturer at least twenty-four hours before such test is made. An inspector may require a test of safety device of any elevator if in his judgment the same is required.

#### *Additional Safeguards.*

The commissioner may require additional safeguards on elevators, if in his judgment the condition, use or surroundings of the elevator demand them.

The commissioner may, with the approval of the mayor, appoint competent elevator inspectors in addition to those already detailed, one for every one thousand elevators and hoistways in the city of Boston.

[See 1914, c. 782, sect. 6.]

[1921, c. 289, sect. 4.]

## SECTION 39.

### WOODEN BUILDINGS.

*Foundations.*— Every wooden building hereafter erected or enlarged outside of the building limits, shall have a foundation of rubble, block granite or brick or concrete, carried up to the surface of the ground, and no round or boulder stone shall be used. Every such foundation, if of brick or concrete, shall be at least twelve inches thick, and if of granite shall be at least eighteen inches thick,

Sect. 39.]

and if of rubble shall be at least twenty inches thick, and shall be laid at least four feet below any surface exposed to frost and upon the solid ground or upon piles properly spaced.

*Underpinning.*— Every such wooden building hereafter erected or enlarged, the sills of which do not rest directly upon a foundation as above described but on an underpinning, shall have such underpinning made of brick, stone or concrete, concrete or terra-cotta blocks, and the underpinning, if of brick concrete, concrete or terra-cotta block, shall be at least eight inches thick, and if of stone shall be at least sixteen inches thick.

*Framing.*— Every wooden building hereafter erected or enlarged shall have all its parts of sufficient strength for their purposes; shall be built with posts, sills and girts not smaller than four by six inches or with ledger boards; shall have no studs more than twenty inches on centers for buildings more than one story high, with all angles between partitions, or between partitions and walls, blocked strongly, giving what is known as "solid corners"; shall have every post securely braced; shall have wall spaces back of all ledger boards tightly filled with at least two inch furring cut in between studs; and shall have all posts and girts properly mortised, tenoned and pinned in each story, and if ledger boards are used they shall be at least one inch by six inches gained full size into posts and studs, all other parts of frame to be nailed or pinned together.

#### LEDGER BOARDS PROHIBITED.

Where no exterior wall boarding is used ledger boards shall not be used, and wall-girts shall be framed to posts and pinned. Braces shall repeat in each story and shall not be smaller than three inch studding.

[1914, c. 782, sect. 7; 1918, c. 179, sect. 17, Special Act.]

[1923, c. 462, sect. 20.]

## SECTION 40.

[See also Zoning Act issued as a separate document.]

## HABITATIONS — HEIGHT — DISTANCE FROM LOT LINE.

No wooden building hereafter erected, to be used as a habitation, shall be more than three stories nor more than forty feet in height above the first floor line; nor shall any part of such a building, eaves and cornices excepted, which is to be occupied by three or more families, be placed nearer than five feet from any adjoining lot lines, and if built on land of the same owner it shall not be nearer than ten feet from any other building; nor shall any part of such wooden building, which is to be occupied by less than three families and is less than three stories in height, be nearer than five feet from the line of any adjoining lot; nor shall any lot line be moved nearer than five feet from any wooden building, or, if built on land of the same owner, nearer than ten feet from any other building, eaves and cornices excepted, unless in either case the wall on the side toward such lot or adjoining building is constructed as a brick or concrete wall not less than eight inches thick and carried twelve inches above the roof, all openings therein to be protected by wire glass set in metal frames and sash. Wooden buildings hereafter constructed to form a block of two or more houses shall have brick or concrete party walls between adjoining houses, which shall be not less than eight inches thick, shall be carried twelve inches above the roof and shall be capped with a metallic covering.

## AREA.

No wooden building hereafter erected to be used in whole or in part as a habitation shall exceed twenty-two hundred square feet in area, and no such existing building



Sect. 40.]

shall be enlarged to exceed twenty-two hundred square feet in area.

#### OTHER THAN HABITATION.

No wooden building hereafter erected to be used for purposes other than habitation shall exceed forty feet in height above the first floor line, and no such building except buildings erected for the purposes of storing ice, which shall not be erected within five hundred feet of any other building, shall exceed twenty-two hundred feet in area unless the external parts are covered with incombustible material approved by the Commissioner and no such building shall exceed five thousand square feet in area in any event: *provided, however*, that nothing in this section shall be construed to affect the provisions of section nine of this act; and no such existing building shall be altered or enlarged to exceed forty feet in height above the first floor line or twenty-two hundred square feet in area, unless the external parts of the whole building are covered with incombustible material approved by the Commissioner or to exceed five thousand square feet in area in any event.

Wooden buildings erected for purposes other than habitation shall not be situated within five feet of the lot lines unless the side wall on such lines be of brick or concrete carried above the roof at least twelve inches and capped with a metallic covering, all openings in such outer walls shall be protected by wire glass set in metal frames and sash. If built on land of the same owner the buildings shall be not nearer than ten feet to any other building, eaves and cornices excepted, unless wall on side toward the lot line or adjoining building is constructed as a brick or concrete wall not less than eight inches thick and carried twelve inches above the roof with all openings therein protected by wire glass set in metal frames and sash.

Sect. 40.]

No wooden building shall be moved, increased in area or altered to be nearer than five feet to the lot lines or ten feet to any other wooden building on land of the same owner.

[1913, c. 704, sect. 2; 1914, c. 248, sect. 1; 1914, c. 782, sect. 8.]

[1923, c. 462, sect. 21.]

## SECTION 41.

### FLOORING DURING CONSTRUCTION.

[General Laws, c. 143, Sects. 17, 18 and 19. See Appendix.]

## SECTION 42.

### ADDITIONAL REQUIREMENTS FOR TENEMENT HOUSES.

#### *Definitions.*

Certain words are defined as follows:—

(1.) A *tenement house* is any house, building, structure or portion thereof, occupied, or adapted for occupation, as a dwelling by more than three families living independently of one another and doing their cooking upon the premises, or by more than two families above the first story so living and cooking. A family living in a tenement house may consist of one or more persons.

An *existing tenement house* is any building erected as such or converted to such use or as altered for such use or so used before the passage of this act, and any building adapted for such use, *provided* that a permit was issued for the erection of said building before the passage of this act.

A *tenement house hereafter erected* is any tenement house other than an existing tenement house as above defined.

(2.) A *corner lot* is a lot situated at the junction of two or more streets, or of two or more streets and alleys or open passageways not less than fifteen feet in width.

(3.) A *yard* is an open unoccupied space on the same lot

Sect. 42.]

with a building and between the extreme rear line of said building and the rear line of the lot.

(4.) A *court* is an open unoccupied space other than a yard on the same lot with a building. An inner court is a court not extending to a street, or alley, or open passageway, or yard. An outer court is a court extending to a street, or alley, or open passageway, or yard. A vent court is an inner court for the lighting and ventilation of water-closets, bathrooms, public halls, and stair halls only. An intake is a passageway connecting an inner court with a street, or alley, or open passageway, or yard.

(5.) A *shaft*, whether for air, light, elevator, dumb-waiter, or any other purpose, is an enclosed space within a building, extending to the roof, and covered either by a skylight or by the roof. A vent shaft is a shaft used solely to ventilate or light water-closet compartments or bathrooms or kitchenettes.

(6.) A *public hall* is a hall, corridor, or passageway not within an apartment.

(7.) A *stair hall* includes the stairs, stair landings, and those parts of the public hall through which it is necessary to pass in going from the entrance floor to the roof.

(8.) An *apartment* is a room, or suite of two or more rooms, occupied or suitable for occupation, as a residence for one family.

(9.) *Repairs* means any renewal of any existing part of a building, or of its fixtures or appurtenances, which does not lessen the strength of the building.

[1921, c. 289, Sect. 5.]

## SECTION 43.

### FIRE ESCAPES.

#### *Tenement Houses.*

Except as provided in section thirty-five, in all tenement houses hereafter erected of the first or second class

Sect. 43.]

more than three *stories in height* and in every building hereafter enlarged and occupied or to be occupied as a tenement house more than three stories in height, there shall be provided at least one of the following means of egress in addition to the staircases, but if the first named means of egress is provided no means of egress other than this and one other staircase need be provided, and every suite shall have direct access to both such means of egress.

(1.) *An enclosed stairway* consisting of iron or reinforced concrete stairs, and stair landings, each not less than three feet in width in the clear, surmounted by a pent house not less than eight feet high. The stairway shall extend from the roof to the level of the ground, and shall open into either a street or passageway leading to a street; the said stairway shall be lighted to the satisfaction of the building commissioner and enclosed in walls of brick, stone, terra-cotta or concrete, and said walls may be within or without the line of the main wall of the building, but access to said stairway shall be only by doors through an external wall to balconies leading to the same, except at the roof where access to said stairway may be directly from the roof.

(2.) *Iron balconies* connecting with adjoining buildings or with adjoining parts of the same house separated from each other by a brick, terra-cotta or concrete partition wall in which there are no openings except such as are protected with fireproof self-closing doors, and every suite above the first floor, shall have direct access to at least two means of egress, one of which shall be an enclosed stairway. The said balconies shall be not less than thirty inches wide and capable of sustaining a load of seventy pounds per square foot; railings shall be of iron, stone, terra-cotta or concrete, and three feet high, or higher if in the opinion of the commissioner a greater height is required for safety.

Sect. 43.]

(3.) *Exterior fire escapes* of iron with iron grated floors, and capable of bearing a load of seventy pounds per square foot. The stair treads shall be of iron, and the pitch of the stairs shall not exceed sixty degrees.

*Balconies* shall be at least three feet four inches wide, and the stairs at least twenty inches wide. There shall be a landing at the foot of each flight, and at the level of the second floor there shall be cantilever ladders. The rails on all horizontal balconies and on the stairs shall be at least two feet ten inches high at all points.

[1914, c. 782, sect. 9.]

[1921, c. 289, sect. 6.]

## SECTION 44.

### BULKHEADS AND SCUTTLES.

#### *Tenement Houses Hereafter Erected.*

Every tenement house of the first or second class hereafter erected shall have in the roof a fireproof bulkhead with a fireproof door to the same, and shall have fireproof stairs with a guide or hand rail leading to the roof, except that in such tenement houses which do not exceed sixty-five feet in height, such bulkheads may be of wood covered with metal on the outside and plastered on metal lathing on the inside; provided that the door shall be covered with metal on both sides.

### EXISTING TENEMENT HOUSES.

Every other tenement house shall have in the roof a bulkhead or scuttle. No scuttle shall be less in size than two feet by three feet, and all scuttles shall be covered on the outside with metal, and shall be provided with stairs or stationary ladders leading thereto and easily accessible to all tenants of the building, and kept free from encumbrance, and all scuttles and ladders shall be

Sect. 44.]

kept so as to be ready for use at all times. No scuttle shall be situated in a closet or room, but all scuttles shall be in the ceiling of the public hall on the top floor, and access through the scuttle to the roof shall be direct and uninterrupted. Scuttles shall be hinged so as to readily open. Every bulkhead hereafter constructed in a tenement house shall be constructed as provided for tenement houses hereafter erected and shall have stairs with a guide or hand rail leading to the roof, and such stairs shall be kept free from encumbrance at all times. No lock shall be placed on any scuttle or bulkhead door, but either may be fastened on the inside by movable bolts or hooks. All key-locks on scuttles and on bulkhead doors shall be removed. No stairway leading to the roof in a tenement house shall be removed.

#### SECTION 45.

##### HOUSES FOR HABITATION — MAIN STAIRCASE.

Every house for habitation, except a single family dwelling, hereafter erected more than three stories in height or covering an area or more than thirty-five hundred square feet shall have a staircase, designated by the commissioner, of incombustible material extending from the entrance to the roof and with a pent house constructed of incombustible material. And the said staircase shall not extend below the entrance floor level, except as an exit to the outside and shall have no opening into basement or cellar and shall be enclosed in walls constructed of incombustible material except as hereinafter provided. In addition to the above staircase, all such buildings shall have a staircase enclosed as described in section forty-seven. All door openings from all stair enclosures shall have metal or metal covered self-closing doors and metal or metal covered frames. Public halls therein shall be at least three feet wide in the clear and stairs shall be at least three feet wide between the wall and the stair rail.

Sect. 45.]

### STAIRWAY ENTRANCES — RISERS — TREADS — WINDOWS.

Each stairway shall have an entrance on the entrance floor from a street or alley or open passageway or from an outer court, or from an inner court which connects directly with a street or alley or open passageway. All stairs shall be constructed with a rise of not more than eight inches, and with treads not less than nine inches wide and not less than three feet long in the clear. Where winders are used all treads at a point eighteen inches from the strings on the wall side shall be at least ten inches wide.

### BALUSTERS. RAILS.

In every tenement house all stairways shall be provided with proper balusters and railings kept in good repair. No public hall or stairs in a tenement house shall be reduced in width so as to be less than the minimum width prescribed in this section.

### TENEMENT HOUSE SPRINKLERS.

In all tenement houses of second and third class construction, hereafter erected, being more than three stories high and containing more than ten suites, the basements or cellars, kitchenettes, stairway enclosures and elevator, light ventilating and dumb-waiter shafts shall be provided with a system of automatic sprinklers approved as to situation, arrangements and efficiency by the building commissioner.

The building commissioner may require the basement or cellar of a tenement house of first class construction, more than three stories high and containing more than ten suites, where in his opinion a fire hazard exists, to be equipped with a system of automatic sprinklers approved by him as to situation, arrangement and efficiency.

---

NOTE.—Sect. 45, pars. 4, 5 and 6, operation of to be suspended if accepted by Mayor, until March 1, 1921. Chap. 645, acts of 1920, Mayor did not accept.

Sect. 45.]

Basements or cellars in existing tenement houses of second and third class construction, being more than three stories high and containing more than ten suites, shall be provided with a system of automatic sprinklers approved as to situation, arrangement and efficiency by the building commissioner.

The building commissioner may in his discretion also require that all doors leading from rear stairway enclosures on each floor of such tenement houses shall be suitably protected by fire proofing material.

In existing tenement houses of first, second and third class construction more than three stories high and containing more than ten suites, where the first floor is of first class construction and in any such tenement house in which any stairway, enclosure, elevator, light, ventilating or dumb-waiter shaft is fireproof, as defined in section thirty-three, as amended by section fourteen of chapter one hundred and seventy-nine of the Special Acts of nineteen hundred and eighteen, the commissioner may waive the provisions of this section in respect to automatic sprinklers, except in cases, where, in his opinion, a fire hazard exists.

#### HALLS AND STAIRS TO BE LIGHTED.

Public halls and main stairways in all tenement houses now existing or hereafter erected three stories or more in height, and accommodating four or more families who are served by a common main stairway and hall, shall be provided with proper and sufficient lights to be kept lighted during the night. The words "main stairway" as used in this section shall mean the staircase so designated by the building commissioner.

#### SHAFTS TO BE ENCLOSED.

In every tenement house now or hereafter existing which is more than three stories high and has more than

---

See note on preceding page.



Sect. 45.]

eight suites, all elevator, vent and dumbwaiter shafts and stairways shall be enclosed in the basement or cellar by masonry walls not less than eight inches thick, or by two-inch solid metal and plaster partitions, with fire-proof self-closing doors.

[1914, c. 782, sect. 10; 1915, c. 352, sect. 4, Special Act.]

[1920, c. 440, sects. 1 and 2.]

[1924, c. 136.]

[1921, c. 289, sect. 7.]

[1921, c. 476.]

[1924, c. 335, sect. 6.]

## SECTION 46.

### STAIR HALLS, CONSTRUCTION OF.

In tenement houses hereafter erected covering more than seventeen hundred and fifty square feet, but not more than thirty-five hundred square feet in superficial area, which do not exceed three stories above the cellar or basement, there shall be at least two stairways. The stairs may be made of wood, provided that the soffits are covered with metal lath and plastered with three coats of cement plaster and provided that such stairs are properly fire-stopped at top, center and bottom of each flight with brick, terra cotta or gypsum block nogging. Public halls therein shall be at least three feet wide in the clear and stairs shall be at least three feet wide between the wall and the stair rail.

[1921, c. 289, sect. 8.]

## SECTION 47.

### STAIR HALLS, HOW ENCLOSED.

In second and third class tenement houses hereafter erected and existing tenement houses hereafter altered, stair halls other than those required to be of first class construction may be enclosed with wooden stud partitions; provided that such partitions are filled in solid the

Sect. 47.]

full height between the studs with brick, terra cotta, gypsum blocks or other filling material approved by the commissioner, all to be laid in mortar and both sides of partition and soffit of stairs plastered with three coats of cement plaster on metal lathing. All openings in these partitions are to be protected as mentioned in section thirty-five of said chapter five hundred and fifty.

[1921, c. 289, sect. 9.]

## SECTION 48.

### ENTRANCE HALLS.

Every entrance hall in every tenement house hereafter erected shall be at least three feet six inches wide in the clear, from the entrance up to and including the stair inclosure, and beyond this point at least three feet wide in the clear, and shall comply with all the conditions of the preceding sections of this act as to the construction of stair halls, except that in a fireproof tenement house hereafter erected the entrance hall may be enclosed with terra-cotta blocks not less than four inches thick and angle-iron construction, instead of brick walls. If such entrance hall is the only entrance to more than one stairway, that portion of said hall between the entrance and the stairway shall be increased at least eighteen inches in width in every part for each additional stairway.

## SECTION 49.

### CELLAR CEILINGS.

In all tenement houses of the second or third class hereafter erected, except where the floor next above is first class construction, the cellar and basement ceiling shall be lathed with metal laths and plastered three coats of cement plaster.

[1921, c. 289, sect. 10.]

## SECTION 50.

## PARTITIONS, CONSTRUCTION OF.

In all tenement houses of the second or third class hereafter erected all stud partitions which rest directly over each other shall run through the wooden floor beams and rest upon the cap of the partition below, and shall have the studding filled in solid between the uprights to the depth of the floor beams with suitable materials. All such buildings having a superficial area of over thirty-five hundred square feet and all buildings more than seventeen hundred and fifty square feet in superficial area and more than four stories or fifty-five feet in height, shall have all stud partitions between suites fireproofed by filling in full height between studs with brick, terra cotta or gypsum blocks or other filling material approved by the commissioner and covering both sides of the separating partitions with metal laths and three coats of cement plaster.

[1921, c. 289, sect. 11.]

## SECTION 51.

## WOODEN TENEMENT HOUSES.

Outside of the building limits, tenement houses not exceeding three stories in height above the basement, nor eighteen hundred square feet in area, may be erected of wood. No wooden tenement house shall be increased in height so as to exceed three stories above the basement or cellar.

## SECTION 52.

## SHAFTS.

All elevator or dumb-waiter shafts hereafter constructed in any tenement house shall be fireproof throughout, with self-closing doors at all openings at each story. But nothing in this section shall be so construed as to require

Sect. 52.]

enclosures about elevators or dumb waiters in the well-hole of stairs where the stairs themselves are enclosed in walls of incombustible materials, and are entirely constructed of fireproof materials as hereinbefore provided. Every vent shaft hereafter constructed in any tenement house shall have an intake of at least the dimensions provided for vent courts in section sixty-one, and shall be of the same minimum dimensions; and the sky-light covering such vent shaft shall be raised at all points at least one foot above the top of the walls of such vent shaft, and the space between the top of said walls and the skylight shall remain at all points open and unobstructed except for such supports essential to the stability of the skylight, as may be approved by the commissioner.

### SECTION 53.

#### BAKERIES AND FAT BOILING.

No bakery and no place of business in which fat is boiled shall be maintained in any tenement house which is not fireproof throughout, unless the ceiling and side walls of said bakery or of the said place where fat boiling is done are made safe by fireproof materials around the same, and there shall be no openings either by door or window, dumb-waiter shafts or otherwise, between said bakery or said place where fat is boiled in any tenement house and the other parts of the building.

### SECTION 54.

#### OTHER DANGEROUS BUSINESSES.

All transoms and windows opening into halls from any part of a tenement house where paint, oil, spirituous liquors or drugs are stored for the purpose of sale or otherwise shall be glazed with wire-glass, or they shall be removed and closed up as solidly as the rest of the wall.

Sect. 54.]

There shall be between any such hall and such part of said tenement house a fireproof self-closing door.

## SECTION 55.

[See also Zoning Act, issued as a separate document.]

### LIGHT AND VENTILATION.

#### *Yards.*

#### TENEMENT HOUSES HEREAFTER ERECTED.

The requirements for yards hereinafter provided shall be deemed sufficient for all tenement houses.

#### WIDTH OF YARD.

Except in those cases hereinafter provided for, there shall be, behind every tenement house hereafter erected, a yard extending across the entire width of the lot, and at every point open from the ground to the sky unobstructed, except by fire escapes or unenclosed outside stairs.

#### DEPTH OF YARD.

The depth of said yard shall be measured from the extreme rear wall of the house to the rear line of the lot, and at right angles to said line, except that where there is an alley or open passageway in the rear of the lot the depth of the yard may be measured to the middle of said alley or open passageway. On an irregular lot of several depths, where there is more than one rear line to the lot, such yard may extend across the entire width of the lot in sections, *provided* that each section of the yard is in every part and at every point of the minimum depth hereinafter prescribed. Where the side lines of a lot converge toward the rear, the depth of the yard shall be such as to give it an area equal to the greatest width of the yard multiplied by the depth hereinafter prescribed.

Sect. 55.]

## CORNER LOTS.

Except on a corner lot, the depth of the yard behind every tenement house hereafter erected fifty feet in height or less shall be not less than *twelve* feet in every part. All yards without exception shall be increased in depth at least one foot for every additional ten feet of height of the building, or fraction thereof, above fifty feet.

Except as hereinafter otherwise provided, the depth of the yard behind every tenement house hereafter erected upon a corner lot shall not be less than *six* feet in every part. But where such corner lot is more than twenty-five feet in width, the depth of the yard for that portion in excess of twenty-five feet shall be not less than twelve feet in every part, and shall increase in depth as above provided.

## THROUGH LOTS.

Whenever a tenement house is hereafter erected upon a lot which runs through from street to street, or from a street to an alley or open passageway, and said lot is one hundred and fifty feet or more in depth, said yard space shall be left midway between the two streets, and shall extend across the entire width of the lot, and shall be not less than twenty-four feet in depth from wall to wall, and shall be increased in depth at least two feet for every additional ten feet in height of the building, or fraction thereof, above fifty feet.

## YARD NOT FRONTING ON STREETS, ETC.

When a tenement house hereafter erected does not front upon a street, a public alley, or a passageway, not less than fifteen feet wide, the requirements in this section as to yards shall apply to the front of such tenement house as well as to the rear. Neither the yard behind one

Sect. 55.]

tenement house nor any part thereof shall be deemed to satisfy in whole or in part the requirement of a yard in front of another tenement house.

## SECTION 56.

### CASES IN WHICH NO YARD SHALL BE REQUIRED.

#### *Tenement Houses Hereafter Erected.*

No yard shall be required behind a tenement house hereafter erected upon a lot which abuts at the rear upon a railroad right of way, a cemetery or a public park.

No yard shall be required behind a tenement house hereafter erected upon a lot entirely surrounded by streets or by streets, alleys or open passageways, not less than fifteen feet in width, or by such streets, alleys, and passageways and a railroad right of way, a cemetery or a public park.

No yard shall be required behind a tenement house hereafter erected upon a lot less than one hundred and fifty feet deep and running through from street to street or from a street to an alley or open passageway not less than fifteen feet in width, or upon a corner lot adjoining a lot less than one hundred and fifty feet deep and running through from street to street, or from a street to such an alley or open passageway.

No yard shall be required behind a tenement house hereafter erected upon a corner lot adjoining a lot more than one hundred and fifty feet deep and running through from street to street or from a street to an alley or open passageway not less than fifteen feet in width; but if there be no yard, an outer court upon such corner lot shall extend from the street along the line of such adjoining lot to a point in line with the middle line of the block; the width of said court to be not less than the width of court prescribed in the ensuing paragraph.

Sect. 56.]

No yard shall be required behind a tenement house hereafter erected upon a corner lot adjoining two or more lots any one of which bounds upon a single street, or alley or open passageway, not less than fifteen feet in width; but if there be no yard an outer court upon such corner lot shall extend from the street, or from such alley or open passageway along a lot line either to the extreme rear of an adjoining lot or to the extreme rear of said corner lot; *provided*, that the width of said court measured from the lot line to the opposite wall of the building, for tenement houses fifty feet or less in height, shall be not less than six feet in every part, and for every additional ten feet of height of the tenement house shall be increased one foot throughout the whole length of said court.

## SECTION 57.

### COURTS.

#### *Tenement Houses Hereafter Erected — Not to be Roofed Over.*

No court of a tenement house hereafter erected shall be covered by a roof or skylight, but every such court shall be at every point open to the sky unobstructed. Except such courts as are provided for in section fifty-six, all courts, except for fire escapes, may start at the second tier of beams.

## SECTION 58.

### OUTER COURTS.

#### *Tenement Houses Hereafter Erected on Lot Line.*

The provisions of this section shall apply only to tenement houses hereafter erected. Where one side of an outer court is located on the lot line, the width of the said court, measured from the lot line to the opposite wall of the building, for tenement houses fifty feet or less in height shall not be less than six feet in every part and for



Sect. 58.]

every ten feet of increase or fraction thereof in height of such tenement houses, such width shall be increased one foot throughout the whole length of the court, and except where the court runs through from the yard to the street, said width shall never be less than one eighth of the length of the court.

*Between Wings or Ells.*

Where an outer court is located between wings or parts of the same building, or between different buildings on the same lot, the width of the court, measured from wall to wall, for tenement houses fifty feet or less in height shall be not less than twelve feet in every part, and for every ten feet of increase or fraction thereof in the height of the said building, such width shall be increased two feet throughout the whole length of the court. The depth of such courts shall never exceed four times their width.

*Windows Opening On.*

Wherever an outer court changes its initial horizontal direction, or wherever any part of such court extends in a direction so as not to receive direct light from the street or yard, or from an alley, or open passageway not less than fifteen feet in width, the length of that part of the court shall never exceed its width, such length to be measured from the point at which the change of direction begins. Wherever an outer court between parts of the same building is twelve feet or less in depth, its width may be one half its depth, provided that such width is never less than four feet in the clear. This exception shall also apply to every offset or recess in outer courts. And no window except windows of water-closet compartments, bathrooms, or halls shall open upon any offset or recess less than four feet in width.

## SECTION 59.

## INNER COURTS.

*Tenement Houses Hereafter Erected — Width — Area.*

The provisions of this section shall apply only to tenement houses hereafter erected. Where one side of an inner court is located on the lot line and the building does not exceed fifty feet in height, the least width of the court shall be not less than eight feet, and the area of the court shall be not less than one hundred and twenty-eight square feet. For every ten feet, or fraction thereof, of increase in the height of the building above fifty feet the minimum width of such inner courts shall be increased by one foot, and the area thereof shall never be less than twice the square of such minimum width. Where an inner court is not located on the lot line but is enclosed on all four sides, and the building does not exceed fifty feet in height, the least width of said court shall be not less than sixteen feet and the area not less than two hundred and fifty-six square feet. For every ten feet, or fraction thereof, of increase in the height of said building above fifty feet, the minimum width of such inner courts shall be increased by two feet, and the area of the court shall never be less than the square of such minimum dimension.

## SECTION 60.

## VENT COURTS.

*Area — Least Dimension.*

Inner courts used solely for the lighting and ventilation of water-closets, bath rooms, kitchenettes, public halls, or stair halls, or for interior fire escapes, may be constructed in any tenement house, and shall be not less than fifteen square feet in area, nor less than three feet in the least horizontal dimension for buildings fifty feet or less in height. For every increase of ten feet or fraction thereof

Sect. 60.]

in the height of such buildings the least dimension shall be increased by one foot, and the area by not less than eight square feet. Vents for kitchenettes must be entirely separate from those used for water-closets and bath rooms.

[1921, c. 289, sect. 12.]

## SECTION 61.

### INTAKES.

Every inner court in a tenement house hereafter erected shall be provided with one or more horizontal intakes at the bottom. Such intakes in vent courts shall be not less than four square feet in area, so arranged as to be easily cleaned; in other inner courts they shall be not less than three feet wide and seven feet high, and there shall be at least two open grille doors, containing not less than fifteen square feet of unobstructed openings, one at the inner court and the other at the street or yard as the case may be.

Nothing contained in the foregoing sections concerning outer and inner courts shall be construed as prohibiting windows in walls that cut off the angles of such courts, provided that the running length of the walls containing such windows does not exceed six feet.

## SECTION 62.

### BUILDINGS ON THE SAME LOT WITH TENEMENT HOUSES.

No tenement house shall hereafter be so enlarged or its lot so diminished, and no building of any kind shall be hereafter so placed upon the same lot with a tenement house, as to decrease the minimum depth of yards, or the minimum size of courts or yards prescribed in this act for tenement houses hereafter erected.

## SECTION 63.

### ROOMS, LIGHTING AND VENTILATION OF.

In every tenement house hereafter erected there shall be in each room, except water-closet compartments and

Sect. 63.]

bath rooms, windows of a total area of at least one eighth the floor area of the room and not less than eleven square feet in area, opening directly on a street or public alley or open passageway not less than fifteen feet wide or upon a yard or court of the dimensions hereinbefore specified, or upon a railroad right of way, cemetery or public park; and such windows shall be located so as properly to light all parts of the room. The top of at least one window shall be not less than seven feet six inches above the floor, and the upper half of it shall be made so as to open the full width.

#### ALCOVES.

Every alcove in every tenement house hereafter erected shall be provided with an opening into a room, such opening to be equal in area to eighty per cent of that side of the alcove in which the opening is located; and the alcove shall have at least one window of not less than fifteen square feet of glazed surface opening as provided in this section.

[1921, c. 289, sect. 13.]

### SECTION 64.

#### ROOMS, SIZE OF.

In every tenement house hereafter erected all rooms, except water-closet compartments and bath rooms, shall be of the following minimum sizes: In each apartment there shall be at least one room containing not less than one hundred and twenty square feet of floor area and provided with a chimney flue and thimble, except where said room is furnished with heat from a central heating apparatus, and every other room shall contain at least seventy square feet of floor area. Each room shall be in every part not less than eight feet high from the finished

Sect. 64.]

floor to the finished ceiling; *provided* that only one half of an attic room need be eight feet high. No portion of a room in any such tenement house shall be partitioned off so as to form a room not conforming to the provisions of sections sixty-three and sixty-four, or so as to form an alcove not conforming to sections sixty-three and seventy.

[1921, c. 289, sect. 14.]

## SECTION 65.

### PUBLIC HALLS.

#### *Lighting of.*

Except as otherwise provided in section sixty-six, in every tenement house hereafter erected covering a superficial area of more than seventeen hundred and fifty square feet, every public hall shall have at least one window opening directly upon a street, a public alley or open passageway not less than ten feet in width, a railroad right of way, a cemetery or a public park, or upon a yard or court or a vent court as provided in section sixty, or be lighted by other means which in the opinion of the commissioner will provide a sufficient amount of light. Either such window shall be at the end of said hall, with the plane of the window substantially at right angles to the axis of the hall, or there shall be at least one window opening as above prescribed in every twenty feet in length or fraction thereof of the hall; but this provision for one window in every twenty feet of hallway shall not apply to that part of the entrance hall between the entrance and the first flight of stairs, provided that the entrance door contains not less than five square feet of glazed surface. At least one of the windows provided to light each public hall shall be at least two feet six inches wide and five feet high, measured between the stop beads.

Sect. 65.]

## SEPARATE HALL.

Any part of a hall which is shut off from any other part of said hall by a door or doors shall be deemed a separate hall within the meaning of this section.

[1921, c. 289, sect. 15.]

[1924, c. 335, sect. 7.]

## SECTION 66.

## WINDOWS FOR STAIR HALLS, SIZE OF.

In every tenement house hereafter erected covering a superficial area of more than seventeen hundred and fifty square feet, the aggregate area of windows to light or ventilate stair halls on each floor shall be at least fifteen square feet: *provided, however*, that when there shall be, within the space enclosed by the stairway and its landings, from the second story upward, an open area for light and ventilation whose least horizontal dimension shall be equal to the width of the stairs, but in no case less than three feet, then the windows required in sections sixty-five and sixty-six may be omitted.

## SKYLIGHT OVER STAIR WELL.

There shall be in the roof, directly over each stair well, in all tenement houses hereafter erected, without windows as above provided, a ventilating skylight provided with ridge ventilators, having a minimum opening of forty square inches, or else such skylights shall be provided with fixed or movable louvres. The glazed roof of the skylight shall not be less than twenty square feet in area.

[1921, c. 289, sect. 16.]

## SECTION 67.

## PRIVACY.

*Water-closets.*

In every apartment of four or more rooms in a tenement house hereafter erected, at least one water-closet compartment shall be accessible without passing through any bedroom.

## SECTION 68.

## BASEMENTS AND CELLARS IN TENEMENT HOUSES AND OTHER BUILDINGS.

*Living Rooms.*

In tenement houses hereafter erected no room in the basement or cellar shall be occupied for living purposes, unless all of the following conditions are complied with:—

*Height Of.*

(1.) Such room shall be at least eight and one half feet high in every part from the floor to the ceiling.

*Water-closets.*

(2.) There shall be appurtenant to such room the use of a separate water-closet, constructed and arranged as required by section sixty-nine.

*Window Openings.*

(3.) Such room shall have a window or windows opening upon the street, an alley or open passageway not less than fifteen feet in width, a railroad right of way, cemetery or public park or upon a yard or court. The total area

Sect. 68.]

of windows in such room shall be at least one eighth of the floor area of the room, and one half of the sash shall be made to open full width, and the top of each window shall be within six inches of the ceiling.

*Damp-proof Walls and Floors.*

(4.) The floor of such room shall be damp-proof and waterproof, and all walls surrounding such room shall be damp-proof.

*Sleeping Rooms.*

No room on any floor of any house or building now existing or hereafter erected, which floor is in whole or in part below the highest point of the curb of a public street or way in front and within twenty-five feet of the outside wall, and no room on any floor thereof, which floor is in whole or in part below the highest point of the ground adjacent to such building and within fifteen feet thereof, shall be occupied for sleeping purposes unless all of the following conditions are complied with:—

*To Abut on Outside Wall.*

(a.) Such room shall on at least one side abut on an outside wall of said building for a space of at least seven feet.

*Windows, Area and Exposure.*

(b.) Such room shall have a window or windows opening directly upon an open space not less than fifteen feet square, and open from the ground to the sky without obstruction; such window or windows shall have a total area of not less than ten square feet and not less than one eighth of the floor area of said room, and both halves of the sash of each window shall be made to open to their full width, and the top of each window shall be within six inches of the ceiling.



Sect. 68.]

(c.) At least sixty per cent of the area of any such room shall be above the level of the highest point of the ground within fifteen feet of the outside wall or walls of said room and in which the windows above required are situated.

*Floors and Walls to be Waterproof.*

(d.) The floor of such room and all walls surrounding such room shall be damp-proof and waterproof.

*Height Of.*

(e.) Such room shall be at least eight feet six inches in height in every part, from floor to ceiling: *provided*, that in tenement houses erected prior to the first day of August, nineteen hundred and seven, and in other houses and buildings erected prior to the first day of June, nineteen hundred and fourteen, it shall be sufficient if said room is seven feet in height over at least four fifths of its area.

*Water-closets — Construction, Arrangement.*

(f.) There shall be appurtenant to such room a water-closet constructed and arranged as required by section sixty-nine, and used solely by the occupants of said room or by the household of which said occupants are members.

*Sleeping Rooms.*

(g.) No such room shall be occupied for sleeping purposes without a permit from the board of health, such permit to be posted in a conspicuous place in the main room of the apartment. A record of all such permits shall be kept in the office of the board of health.

*Requirements when Exempted.*

(h.) Whenever basement rooms which do not comply with all the technical requirements of this act are, in

Sect. 68.]

the opinion of the board of health, supplied with sufficient light and ventilation and are suitable rooms for living and sleeping purposes, the board, after an inspection of the premises and a report in writing as to the area, capacity and other conditions, may issue a certificate to the owner of the building stating that, in the opinion of the board, such rooms are fit to be occupied for living and sleeping purposes. The issue of the said certificate shall operate as an exemption from the technical requirements of this section in all the particulars set forth in said certificate: *provided*, that said certificate is kept at all times posted in a conspicuous place in such room. A file and record of all such reports and certificates shall be kept in the office of the board of health. Said board may revoke the certificate if such room, in its opinion, ceases to be suitable for the purposes named in the certificate.

[1914, c. 628, sect. 1; 1915, c. 346, Special Act.]

## SECTION 69.

### WATER-CLOSETS IN TENEMENT HOUSES HEREAFTER ERECTED.

In every tenement house hereafter erected there shall be a separate water-closet in a separate compartment within each apartment. Every such water-closet shall be placed in a compartment completely separated from every other water-closet, and such compartment shall be not less than two feet and nine inches wide, and shall be enclosed with plastered partitions, or some equally substantial material, which shall extend to the ceiling. Such compartment shall have a window, opening directly, or through a straight horizontal shaft of the same dimensions as the window and not more than four feet long, upon a street, a railroad right of way, cemetery or public park or a yard or alley or open passageway not less than four feet

Sect. 69.]

wide, or upon a court vent or upon a covered passageway not more than twenty feet long and at least twenty feet wide, and twenty feet high. Every such window shall be at least one foot by three feet between stop beads; and the whole window shall be made so as to open readily. When, however, such water-closet compartment is located on the top floor and is lighted and ventilated by a skylight over it, no window shall be necessary, provided that the roof of such skylight contains at least three square feet of glazed surface and is arranged so as to open readily. Nothing in this section in regard to the separation of water-closet compartments from each other shall apply to a general toilet room containing several water-closets, hereafter placed in a tenement house, provided that such water-closets are supplemental to the water-closet accommodations required by law for the use of the tenants of the said house. Nothing in this section in regard to the ventilation of water-closet compartments shall apply to a water-closet hereafter placed in an existing tenement house, to replace a defective fixture in the same position and location. No water-closet shall be maintained in the cellar of any tenement house without a permit in writing from the board of health; and said board shall have power to make rules and regulations governing the maintenance of such closets. Every water-closet compartment in any tenement house shall be provided with proper means of lighting the same at night. If fixtures for gas or electricity are not provided in such compartment, then the door of such compartment shall be provided with translucent glass panels, or with a translucent glass transom, not less in area than four square feet. The floor of every such water-closet compartment shall be made waterproof with asphalt, tile, stone or some other waterproof material; and such waterproofing shall extend at least six inches above the floor on all sides of the compartment except at

Sect. 69.]

the door opening so that the floor can be washed or flushed without leaking. No drip trays shall be permitted. No water-closet fixtures shall be inclosed with any woodwork.

[1922, chap. 61.]

## SECTION 70.

### LIGHTING AND VENTILATION OF EXISTING TENEMENT HOUSES.

Excepting water-closet compartments and bathrooms, wherever a room in any tenement house has a window or windows of less than nine square feet of glazed surface opening on a street, a railroad right of way, cemetery, public park, alley or open passageway not less than ten feet in width, such window or windows shall be enlarged and provided with the above mentioned glazed surface, and wherever such room does not open as above provided or opens upon an alley or open passageway less than ten feet in width or upon a shaft or upon a court less than six feet in its least dimension, then such room shall be provided with a sash window communicating with another room in the same apartment, having windows of at least the superficial area prescribed for the windows of rooms in tenement houses hereafter erected and opening on a street, a railroad right of way, cemetery, public park or alley or open passageway at least ten feet in width, or on a court or courts at least equivalent to the courts required in sections fifty-eight and fifty-nine; and such new sash window shall contain not less than fifteen square feet of glazed surface and shall be made so as to open readily. One wall of every alcove in an existing tenement house shall be provided with an opening equal in area to eighty per cent of the wall. No tenement house shall be so altered as to reduce the provisions for the light and ventilation of any room or alcove or public hall or stair hall below the requirements of this act.

## SECTION 71.

## SKYLIGHTS.

*Existing Tenement Houses.*

In every existing tenement house there shall be in the roof, directly over each stair well, a ventilating skylight, provided with ridge ventilators and also with fixed or movable louvres or movable sashes. But this section shall not apply to any tenement house now having windows as provided in section sixty-five or a bulkhead in the roof over the main stairs, which bulkhead is provided with windows made so as to open readily and with not less than twelve square feet of glass in the top of the bulkhead. All skylights hereafter placed in any tenement house shall conform to the provisions of section sixty-six. All the existing dome lights or other obstructions to skylight ventilation shall be removed.

*Public Hall — Lighting Of.*

Where the public hall in an existing tenement house is not provided with windows opening as provided in section sixty-five, and where there is not a stair well as provided in section sixty-six, all doors leading from such public hall into apartments shall be provided with translucent glass panels of an area of not less than four square feet for each door; or such public hall may be lighted by a window or windows at the end thereof with the plane of the window at right angles to the axis of the hall, said window opening upon the street, a railroad right of way, cemetery, public park, or an alley or open passageway at least ten feet in width, or upon a yard or court of the dimensions hereinbefore provided.

## SECTION 72.

## WATER-CLOSETS IN EXISTING TENEMENT HOUSES.

In existing tenement houses the woodwork enclosing the space underneath the seat of all water-closets used in common by two or more families shall be removed and such space shall be left open. The floor or other surface beneath and around such closet shall be maintained in good order and repair, and the floors made waterproof to the satisfaction of the board of health.

## WATER-CLOSETS, NUMBER REQUIRED.

Every such water-closet shall be located in a compartment completely separated from every other water-closet, and such compartment shall be ventilated to the satisfaction of the board of health. There shall be provided at least one water-closet for every three families, or for every nine rooms in every existing tenement house.

## SECTION 73.

## WATER SUPPLY.

*Tenement Houses Hereafter Erected.*

In every tenement house hereafter erected there shall be in each apartment a proper sink with running water.

*Existing Tenement House.*

Every existing tenement house shall have water furnished in sufficient quantity at one or more places on each floor occupied by or suitable to be occupied by one or more families. The owner shall provide proper and suitable tanks, pumps or other appliances to receive and to distribute a sufficient supply of water at each floor in the said house at all times of the year, during all hours of the day and night.

Sect. 73.]

*Sinks in Public Halls.*

The woodwork enclosing sinks located in the public halls or stairs shall be removed and the space underneath the sinks shall be left open. The floors and wall surfaces beneath and around the sink shall be maintained in good order and repair.

## SECTION 74.

## DRAINAGE OF COURTS AND YARDS.

*Tenement Houses.*

In every tenement house all courts, areas, intakes and yards shall be properly graded, drained and paved or otherwise surfaced to the satisfaction of the board of health.

## SECTION 75.

## RECEPTACLES FOR GARBAGE AND ASHES.

*Tenement House.*

The owner of every tenement house shall provide therefor suitable covered, water-tight receptacles satisfactory to the board of health, for ashes, rubbish, garbage, refuse and other matter. No person shall place ashes, rubbish, garbage, refuse or other matter in the yards, open areas or alleys connected with, or appurtenant to, any tenement house except in suitable receptacles provided for the same.

[Repealed so far as inconsistent with 1907, c. 550, sect. 128; as amended by 1913, c 586, sect. 1.]

## SECTION 76.

## POWERS OF THE BUILDING COMMISSIONER.

The commissioner shall not dispense with any of the requirements of sections forty-two to seventy-five, inclusive.

## SECTION 77.

## THEATRES.

*Definition.*

Every building hereafter erected so as to contain an audience hall and a stage, with curtain, movable or shifting scenery, and machinery, adapted for the giving of plays, operas, spectacles or similar forms of entertainment, shall be a theatre within the meaning of this act. No existing building not now used as a theatre shall be altered and used as a theatre, unless it conforms to the provisions of this act for a new theatre.

[1921, c. 60, sect. 3.]

## SECTION 78.

## CONSTRUCTION.

Every theatre hereafter built shall be of first-class construction, and the steel work of the stage, of the fly galleries, and of the rigging loft need not be fireproofed.

[1921, c. 60, sect. 4.]

## SECTION 79.

## OPEN COURTS.

Every theatre built in a block not on a corner shall have an open court or passageway on both sides extending from the proscenium line to the line of the street on the front, or, in case the building abuts on a street both in front and rear, these passages may extend from the line of the front of the auditorium to the line of the rear street. These passages shall be at least six feet wide throughout their length, and shall not be closed by any locked gate or doorway. They shall immediately adjoin the auditorium, or a side passage or lobby directly con-



Sect. 79.]

nected therewith. These passages shall be open to the sky opposite the whole depth of the auditorium, but may be carried out to the street front or rear through passages enclosed by brick walls or other fireproof material equally efficient, and covered by a solid brick vault at least eight inches thick, each passage to be not less than eight feet wide and ten feet high throughout.

## SECTION 80.

### INNER COURT.

Every theatre built upon the corner of two streets shall have one inner court on the side of the building away from the side street, such court to be of the same description as the courts provided for in the preceding paragraph.

## SECTION 81.

### STORES, ETC.

Nothing in this act shall be construed to prohibit the use of any part of a theatre building for stores, offices, or for habitation, provided that the parts so used for a theatre shall be built with exits to the street entirely distinct from the rest of the building and shall be separated from the rest of the building by solid partition walls and floors, walls not to be less than twelve inches in thickness, without any openings in the same.

[1923, c. 467, sect. 22.]

## SECTION 82.

### FLOOR LEVELS.

In all theatres, the entrances shall be not more than one step above the level of the sidewalk of the main street, and the stage shall be not more than five feet above the said level.

## SECTION 83.

## PROSCENIUM WALL.

The stage of every theatre shall be separated from the auditorium by a wall of fireproof construction, which wall shall extend the whole width of the auditorium and the whole height to the roof of the portion occupied by the stage. There shall be no openings through this wall except the curtain opening, one doorway each side behind the boxes, and one doorway which shall be located at or below the level of the stage, and plumbing, ventilating and such other pipe openings as may be approved by the building commissioner, such openings to be fire-stopped. The doorways shall not exceed twenty-one superficial feet each, and shall have standard fire-doors hung in a manner satisfactory to the commissioner. The finish or decorative features around the curtain opening of every theatre shall be of fireproof material.

[1921, c. 60, sect. 5.]

## SECTION 84.

## CURTAIN.

The proscenium or curtain opening of every theatre shall have a fire-resisting curtain reinforced by wire netting or otherwise strengthened. If of iron, or similar heavy material, and made to lower from the top, it shall be so arranged as to be stopped securely at a height of seven feet above the stage floor, the remaining opening being closed by a curtain or valance of fire-resisting fabric.

## SECTION 85.

## STAGE FLOOR.

The part of the stage floor, usually equal to the width of the proscenium opening, used in working scenery,

Sect. 85.]

traps or other mechanical apparatus, may be of wood, and no flooring used thereon shall be less than one and one eighth inches in thickness.

## SECTION 86.

### VENTILATORS.

There shall be one or more ventilators near the centre, and above the highest part of the stage of every theatre, of a combined area of opening satisfactory to the commissioner, and not less than one tenth of the area of the undivided floor space behind the curtain at the stage floor level. The openings in every such ventilator shall be closed by valves or louvres so counter-balanced as to open automatically, which shall be kept closed, when not in use, by a fusible link and cord reaching to the prompter's desk, and readily operated therefrom. Such cord shall be of combustible material, and so arranged that if it is severed the ventilator will open automatically.

### SKYLIGHT COVERINGS FOR VENTILATORS.

Skylight coverings for ventilators shall have sheet metal frame set with double-thick glass, each pane thereof measuring not less than three hundred square inches, or shall be protected with wire glass. If wire glass is not used, a suitable wire netting shall be placed immediately beneath the glass, but above the ventilator openings. Illuminating fixtures and glass on illuminating fixture over the auditorium shall be suspended and secured in a manner approved by the fire commissioner.

### ILLUMINATING FIXTURES OVER AUDITORIUM.

Glass on illuminating fixtures over the auditorium shall be secured from danger of falling as the commissioner shall require, but in no case shall any glass more than six inches

Sect. 86.]

in diameter or length be hung over the auditorium unless protected from falling by a wire netting or similar device satisfactory to the commissioner.

[1923, c. 462, sect. 23.]

## SECTION 87.

### SEATS IN AUDITORIUM.

All seats in the auditorium excepting those contained in boxes shall be spaced not less than thirty inches from back to back, measured in a horizontal direction, and shall be firmly secured to the floor. No rows of seats in the auditorium shall contain more than fourteen seats between aisles and where there is but one aisle no row shall contain more than seven seats.

### BALCONY AND GALLERY PLATFORMS.

The platforms for seats in balconies and galleries shall nowhere have a greater rise than twenty-one inches, nor be less than thirty inches from back to back.

## SECTION 88.

### AISLES.

All aisles on the respective floors in the auditorium, having seats on both sides of the same, shall be not less than thirty inches wide where they begin and shall be increased in width toward the exit in the ratio of one inch to five running feet. Aisles having seats on one side only shall be not less than two feet wide at their beginning and shall increase in width, the same as aisles having seats on both sides.

## SECTION 89.

### CHANGES IN LEVEL.

All changes in the levels of the floors of such buildings, except under stairways, from story to story, and except

Sect. 89.]

the necessary steps in galleries and balconies rising or declining toward the exits, shall be made by inclines or declines of no steeper gradient than two in ten within the auditorium, and rising toward the exits, and one in ten for all others.

[1921, c. 60, sect. 7.]

## SECTION 90.

### LOBBIES.

Preceding each division of the theatre there shall be foyers, lobbies, corridors, or passages, the aggregate capacity of which on each floor or gallery shall be sufficient to contain the whole number to be accommodated on such floor or gallery in the ratio of one square foot of floor room for each person.

## SECTION 91.

### STAGE DOORS.

There shall be not less than two exit doors each not less than three feet in width, located on opposite sides of the stage, and opening directly upon a street, alley, court, or courtway leading to a public thoroughfare.

## SECTION 92.

### ROOM EXITS.

All rooms in theatres for the use of persons employed therein shall have passages to at least two independent means of exit.

## SECTION 93.

### DOORS TO OPEN OUTWARD.

All doors of exit or entrance shall open outward, and shall be hung so as to swing in such a manner as not to become an obstruction in a passage or corridor, and no

Sect. 93.]

such doors shall be fastened so as to be inoperative when the building is occupied by an audience.

## SECTION 94.

### FALSE DOORS.

No mirrors shall be so placed as to give the appearance of a doorway or exit, hallway, or corridor, nor shall there be any false doors or windows.

## SECTION 95.

### MAIN FLOOR AND FIRST GALLERY EXITS.

A common exit may serve for the main floor of the auditorium and the first gallery, provided that its capacity be equal to the aggregate capacity of the outlets from the main floor and the said gallery; and provided that the lowermost run of any exit leading from a gallery shall not open directly at right angles with the central axis of a common exit unless there is a clear space or landing of at least one and one quarter times the width of the exit between the foot of such exit and such centre line or nearest exit doorway.

## SECTION 96.

### EXITS.

#### *Balcony and Gallery.*

Two distinct and separate exits shall be provided for each gallery and balcony above the main floor; and the same shall be located on opposite sides of the galleries.

All gallery or balcony exits shall start with a width of not less than four feet at the uppermost gallery.

Exits from balconies and galleries shall not communicate with the basement or cellar.

## SECTION 97.

## AGGREGATE WIDTH OF EXITS.

The aggregate width of all the exits previously described shall be estimated on a basis of not less than twenty inches for every one hundred persons for whom seats are provided in the sections of the auditorium served by the respective exits.

## SECTION 98.

## EMERGENCY EXITS.

In addition to the exits previously described there shall be one exit from each side of each gallery, balcony, and main floor of auditorium, at least five feet wide, leading to exterior balconies not less than four feet wide and twenty feet long on each side of the auditorium. From such balconies there shall be staircases extending to the ground level, which may be counterweighted, with risers of not over eight and one half inches and treads of not less than nine and one half inches, inclusive of nosing. The aggregate width of these emergency stairs shall be not less than ten inches for every one hundred people served thereby, no single stairs being less than thirty inches wide.

Where all such stairs are in an interior court, each run shall be covered by a light awning of iron.

Nothing herein shall prohibit the building of emergency stairs and exits inside the walls of the building, provided that they are surrounded by a fireproof partition not less than four inches thick separating the exits and stairways from the audience room or auditorium.

[1921, c. 60, sect. 8.]

## SECTION 99.

## ADDITIONAL REQUIREMENTS.

The commissioner shall have power to require a greater number or capacity of exits than is herein prescribed.

Sect. 99.]

## ILLUMINATED EXIT SIGNS.

In every theatre there shall be over every exit, on the inside, and over every opening to a fire-escape, on the inside, an illuminated sign, bearing the word "exit" or "fire-escape," respectively, in letters not less than four inches high. The lights for the exit signs, passages, stairs, lobbies, auditoriums, rear of auditoriums, balconies, galleries, and for the balconies and stairs outside the building, shall be so arranged that they can be turned on or off independently of the means provided on the stage or in any part of the building in the rear of the proscenium wall. Every exit sign shall be kept illuminated, and every outside balcony and fire-escape shall be kept well lighted during the performance, except outside exits during a performance before sunset.

## EXIT PLAN ON PROGRAM.

Plans showing the exits and stairways shall be legibly printed so as to occupy a full page of every programme or play-bills or shall be shown by stereopticon upon a moving picture screen at least once during the afternoon and evening for a period of not less than two minutes.

## GAS PIPE OUTLETS AND BURNERS.

In said buildings there shall be such number of gas pipe outlets as the commissioner may require, fitted with no less than two gas burners. Such burners shall be inspected and tried at least once in every three months by inspectors of the department, to ascertain if they are in proper working order. The inspector shall make a report of each visit, stating the condition of the burners and the action of the inspector in regard to them.



Sect. 99.]

**DEFECTIVE BURNERS.**

The commissioner shall have authority to order any defect in the working of such burners as are necessary for public safety to be remedied.

**EXISTING THEATRE BURNERS.**

So much of this section as applies to the inspection of gas burners shall apply to buildings now used as theatres.

[1921, c. 60 sect. 9.]

**SECTION 100.****STAIRS.**

The cut of the stair stringers shall not exceed seven and one-half inches rise, nor be less than ten and one-half inches tread. There shall be no flights of stairs of more than fifteen or less than three steps between landings.

**SECTION 101.****LANDINGS OF STAIRS.**

Every landing shall be at least four feet wide. When straight stairs return directly on themselves, a landing of the full width of both flights, without any steps, shall be provided. The outer line of landings shall be curved to a radius of not less than two feet to avoid square angles. Stairs turning at an angle shall have a proper landing without winders introduced at the turn except stairway leading to private boxes. No door shall open immediately upon a flight of stairs, but a landing at least two feet wider than the width of the door openings shall be provided between such stairs and such door. When two side flights connect with one main flight, no windows shall

Sect. 101.]

be introduced, and the width of the main flight shall be at least equal to the aggregate width of the side flights.

[1921, c. 60, sect. 10.]

## SECTION 102.

### HAND RAILS.

All enclosed stairways shall have, on both sides, strong hand-rails, firmly secured to the wall, about three inches distant therefrom and about three feet high above the stairs.

All stairways eight feet and over in width shall be provided with a central rail of metal or hard wood, not less than two inches in diameter, placed at a height of about three feet above the centre of the treads, supported on wrought metal or brass standards of sufficient strength, securely bolted to the treads or risers of the stairs; and at the head of each flight of stairs, and on each side of the landing, the post or standard shall be at least six feet in height, and the rail shall be secured to the post.

## SECTION 103.

### MEASUREMENTS FOR WIDTH OF STAIRS.

The width of all stairs shall be measured in the clear between the hand-rails.

No winding or circular stairs shall be permitted.

## SECTION 104.

### RADIATORS FORBIDDEN IN PASSAGEWAYS.

No coil or radiator or floor register shall be placed in any aisle or passageway used as an exit; but all such coils and radiators may be placed in recesses formed in the wall or partition to receive the same.

Sect. 104.]

## HEATING APPARATUS LOCATION.

No boiler, furnace, engine or heating apparatus, except steam, hot water or hot air pipes or radiators shall be located under the auditorium or under any passage or stairway or exit of any theatre.

## SPRINKLERS AND STANDPIPES.

There shall be at least two two-inch high-service stand-pipes on the stage of every theatre, with ample provision of hose nozzles at each level of the stage on each side, and the water shall be kept turned on during the occupation of the building by an audience. The said pipes shall in no case be sealed, and shall have two gates, one above the other, with a proper test or waste valve; the lower gate to be kept open at all times. The proscenium opening of every theater shall be provided with a two and one half inch perforated iron pipe, or equivalent equipment of automatic or open sprinklers, so constructed as to form, when in operation, a complete water curtain for the whole proscenium opening, and there shall be for the rest of the stage a complete system of fire apparatus and perforated iron pipes, automatic or open sprinklers. Such pipes or sprinklers shall be supplied with water by high pressure service, and shall be at all times ready for use.

## SECTION 105.

## PLACES OF PUBLIC ASSEMBLY.

*Hereafter Erected.*

Every building hereafter erected with a hall or assembly room to contain a public audience of more than eight hundred persons, or with more than one superimposed gallery or balcony, shall be of first class construction;

Sect. 105.]

except that halls or assembly-rooms, the mean level of the main floor of which is not more than five feet above the grade of the principal street, upon which it abuts or of the adjoining land may have roofs of second class construction.

Every building hereafter erected with a hall or assembly-room to contain an audience of more than six hundred persons, the main floor of which is raised more than fifteen feet above the level of the curb of the principal street upon which it abuts or of the adjoining land, shall be of first-class construction throughout.

#### *Capacity.*

The capacity of a hall or assembly-room shall be estimated on the basis of six square feet for each person.

If several halls or assembly-rooms are provided in one building, their aggregate capacity shall be considered as determining whether or not the building shall be of fireproof construction, unless the several halls are enclosed by or separated from each other by fireproof walls, or floors, with fireproof doors in the same, in which case the building may be of second-class construction.

#### *Alterations to Conform to Act.*

No existing building shall be altered to contain a hall or assembly-room exceeding the foregoing dimensions, unless the whole building as altered shall conform to the provisions of this act.

#### *Seats.—Obstructions.*

All seats in places of public assemblage shall be spaced as hereinbefore provided, and, while such places of public assemblage are occupied by an audience, shall be secured in such manner as will be satisfactory to the building com-

Sect. 105.]

missioner of the city of Boston. No temporary seats or other obstructions shall be allowed in any aisle, passageway or stairway of a place of public assemblage, and no person shall remain in any aisle, passageway or stairway of any building during any performance.

*Existing Hall. Ways of Egress, Lighting Of.*

Every existing building containing a hall or assembly-room to which admission is not free, and to which the provisions of chapter four hundred and ninety-four of the acts of the year nineteen hundred and eight, relative to the licensing of public entertainments apply, shall have all the ways of egress from such building sufficiently lighted, and lighted in a manner satisfactory to the building commissioner, while the hall or assembly-room is occupied by an audience.

[1912, c. 370, sect. 1.]

[1913, c. 50, sect. 1.]

[1921, c. 60, sect. 11.]

[1923, c. 462, sect. 24.]

SECTION 106.

MOVING PICTURE SHOWS.

All moving picture shows shall be subject to the provisions of chapter one hundred and seventy-six and of chapter four hundred and thirty-seven of the acts of the year nineteen hundred and five, and of any amendments thereof or additions thereto now or hereafter made.

SECTION 107.

EXITS, ETC.

*Halls — Hereafter Erected.*

Every building hereafter erected containing a hall or assembly-room shall conform to all the aforesaid require-

Sect. 107.]

ments as to exits, stairways, exit lights, aisles, and seats, which apply to theatres; provided, that the same are necessary for the preservation of public safety and are specially ordered by the building commissioner. All orders of the building commissioner under the provisions of this section shall be subject to the authority of a majority of the Board of Appeal, which may annul or modify such orders.

[1915, c. 352, sect. 5. Special Act.]

## SECTION 108.

### ROOF GARDENS.

Nothing herein contained shall prevent the placing of a roof garden, art gallery, or rooms for similar purposes above a theatre, provided the floor of the same forming the roof over such theatre shall be constructed of fireproof materials, and shall have no covering boards or sleepers of wood. Every roof over such garden or other rooms shall have all supports and rafters of steel, and, if covered, shall be covered with glass or fireproof material, or both.

## SECTION 109.

### EXITS FROM ROOF GARDENS.

Exits from roof gardens may communicate with stairs leading from the auditorium of the theatre, but they shall be at least four in number, not less than four feet six inches wide, and distinct and separate from each other from roof to street.

## SECTION 110.

### SUMMER THEATRES.

Summer theatres, if built without the building limits, and located thirty feet distant from any other building or structure or adjoining lot lines, and of no greater seat-

Sect. 110.]

ing capacity than seven hundred and fifty persons, and not more than one story high, without balconies, or galleries, may be constructed as follows:—

The auditorium, without a cellar or basement, with open sides of double the number of exits as hereinbefore provided, opening directly into the surrounding courts or gardens at the grade level, and the adjoining dressing rooms, may be of wooden construction, but the stage shall be enclosed in brick walls not less than twelve inches thick, or shall be plastered on metal lathing throughout: *provided*, that the openings leading to the dressing rooms shall be provided with fire doors.

Otherwise, all protective features and arrangements shall comply with all previous sections of this title.

## SECTION 111.

### EXISTING THEATRES.

#### *Stairs — Stairways.*

All stairs of theatres shall have throughout proper hand-rails on both sides firmly secured to walls or to strong posts and balusters. Stairways twelve feet or more wide shall have one or more intermediate rails not more than eight feet apart and properly supported.

#### *Heating Apparatus — Location.*

No boiler, furnace, engine or heating apparatus, except steam, hot water or hot air pipes or radiators, shall be located under the auditorium nor under any passage or stairway or exit of any theatre.

#### *Illuminated Exit Signs — Emergency Lights.*

In every theatre there shall be over every exit, on the inside, and over every opening to a fire-escape, on the

Sect. 111.]

inside, an illuminated sign, bearing the word "exit" or "fire-escape," respectively, in letters not less than four inches high. An emergency arc light or its equivalent shall be installed in the auditorium, which light or lights, exit lights, and all lights in halls, corridors, or any part of the building used by the audience, except the general auditorium lighting, shall be fed independently of the stage lighting, and shall be controlled only from the lobby or other convenient place in the front of the house. Every exit sign shall be kept illuminated and every outside balcony and fire-escape shall be kept well lighted during the performance, except outside exists during a performance in the daytime and before sunset.

*Exits to Open Outward — Plans of Exits on Programs.*

The exits and openings to fire-escapes of all theatres shall open outward and have fastenings on the inside only. They shall be unfastened during every performance and shall be so arranged that they can easily be opened from within. Plans showing the exits and stairways shall be legibly printed so as to occupy a full page of every program or play bill.

*Temporary Seats.*

No temporary seats or other obstructions shall be allowed in any aisle or stairway of a theatre and no person shall remain in any aisle or stairway of any such building during any performance.

*Fire Curtain.*

The proscenium or curtain opening of every theatre shall have a fire resisting curtain of incombustible material reinforced by wire netting or otherwise strengthened. If of iron, or similar heavy material, and made to lower



Sect. 111.]

from the top, it shall be so arranged as to be stopped securely at a height of seven feet above the stage floor, the remaining opening being closed by a curtain or valance of fire-resisting fabric. The curtain shall be raised at the beginning and lowered at the end of every performance, and shall be of proper material, construction and mechanism.

#### *Stage Ventilators.*

There shall be one or more ventilators near the centre and above the highest part of the stage of every theatre, of a combined area of opening satisfactory to the building commissioner, and not less than one tenth of the area of the proscenium opening. Every such ventilator shall have a valve or louvre so counterbalanced as to open automatically, and shall be kept closed, when not in use, by a fusible link and cord reaching to the prompter's desk, or any other place easily reached from the stage level and readily operated therefrom. Such cord shall be of combustible material, and so arranged that if it is severed the ventilator will open automatically.

#### *Standpipes — Sprinklers.*

There shall be at least two two-inch high-service standpipes on the stage of every theatre, with ample provision of hose nozzle at each level of the stage on each side and the water shall be kept turned on during the occupation of the building by an audience. The said pipes shall in no case be sealed and shall have a gate and check valve and shall have a test valve placed between the gate valve and check valve. The proscenium opening of every theatre shall be provided with a two and one half inch perforated iron pipe or equivalent equipment of automatic or open sprinklers, as the commissioner may direct, so constructed as to form when in operation a complete water curtain for

Sect. 111.]

the whole proscenium opening and there shall be for the rest of the stage a complete system of fire apparatus and perforated iron pipes, automatic or open sprinklers. Such pipes or sprinklers shall be supplied with water by high pressure service, and shall be ready for use at all times.

[1908, c. 336, sect. 1.]

[1909, c. 313, sect. 1.]

## SECTION 112.

### PLUMBING.

[See separate document issued under this title.]

#### *Definition of Terms.*

The following terms shall have the meanings respectively assigned to them:—

“*Repair of Leaks*” shall mean such repairs as are necessary to protect property, but do not involve any extensive change in construction.

“*Y-branches*” shall mean a branch at sufficient angle to direct the flow and prevent backing up.

“*Air pipes*” or “*back air pipes*” shall mean air pipes from traps that extend toward the main soil pipe of the outer air and connect with not more than three traps.

“*Vent pipes*” shall mean general lines of back air pipes connecting with more than three fixtures.

“*Drain*” shall mean that part of the drainage system of a building extending through basement or cellar to sewer.

“*Soil pipe*” shall mean that part of the drainage system of a building, of four inches or more internal diameter, between basement or cellar and the highest fixture in the building.

“*Ventilation pipe*” shall mean the extension of the soil pipe from the highest fixture to and through the roof.

“*Surface drain*” shall mean a connection with drain in the basement to allow egress of surface water or overflow.

Sect. 112.]

“*Fixture*” shall mean any receptacle or outlet placed for the purpose of disposing of waste water or other matter, and connecting with the waste, soil or drain pipe of a building.

### SECTION 113.

#### REGISTRATION.

No plumber shall engage in or work at the business of plumbing unless he shall first have registered his name and place of business in the office of the commissioner, and no person shall by display of sign or plumbing material, or otherwise, advertise as a plumber unless he shall have been registered or licensed as such. Every master plumber shall conspicuously display his certificate or license within his place of business. Notice of any change in the place of business of a registered or licensed master plumber shall immediately be given by him to the commissioner.

[Chap. 103, Revised Laws.]

[Chap. 287, Acts of 1914.]

[Chap. 536, Acts of 1919.]

### SECTION 114.

#### NOTICES.

Every plumber, before any work in a building, shall, except in the case of repair of leaks, file in the office of the commissioner upon blanks for that purpose, an application for a permit, and if required by the commissioner a plan or sketch of the work to be performed; and no such work shall be done in any building without a written permit from the commissioner.

### SECTION 115.

#### CONNECTION WITH SEWER OR DRAIN.

The plumbing of every building shall be separately and independently connected outside the building with the

Sect. 115.]

public sewer, if such sewer is provided, or with a proper and sufficient private drain or sewer laid outside of the building, and if a sewer is not accessible, with a proper cesspool. Several buildings may have a common sewer connection if such connection is approved by the commissioner and the superintendent of sewers.

## SECTION 116.

### INSPECTION AND TESTS.

Pipes or other fixtures shall not be covered or concealed from view until approved by the commissioner, who shall examine or test the same within two working days after notice that they are ready for inspection. Plumbing shall not be used unless, when roughed in, the wastes, vents and back air pipes and traps are first tested by water or sufficient air pressure in the presence of an inspector, when such testing is practicable.

## SECTION 117.

### SOIL AND WASTE PIPES AND TRAPS.

The waste pipe of every independent sink, basin, bath-tub, water closet, slop-hopper, urinal or other fixture shall be furnished with a separate trap which shall be placed as near as practicable to the fixture which it serves. A sink and set of three wash-trays may be connected to the house drain through one five-inch round trap, when the outlet of the sink is not over three feet six inches from the nearest outlet from the wash-trays; and in such case the trap shall be above the floor. The outlet from each fixture shall enter the trap separately. Not more than four wash-bowls or sinks in a continuous line may be connected to the house drain through one five-inch round trap. Two or more fixtures on the same level with not more than two feet of waste pipe and connecting into the

Sect. 117.]

soil or waste pipe not more than eighteen inches below the top water line of the trap, shall not require other vent than the continuation of the soil or waste pipe full size for its whole length. Lateral branches of soil or waste pipe, if more than twenty feet in length, shall be extended through the roof undiminished in size. All connections on lead waste and back air pipes and of lead pipes to brass ferule and soldering nipples shall be full size wiped soldered branch, round or flange joints. Soil and waste pipes shall have proper T-Y or Y branches for all fixture connections. No connection to lead bends for water-closets or slop sinks shall be permitted, except the required back air pipe where a continuous vent is not practicable.

#### EARTHENWARE TRAPS.

Earthenware traps shall have heavy brass floor plates soldered to the lead bends and bolted to the trap flange, and the joint made gas tight with red or white lead. Rubber washers for floor connections shall not be used.

#### BACK AIR PIPES, VENTS, ETC.

Traps shall be protected from siphonage or air pressure by special iron or brass air pipes of a size not less than the waste pipes they serve; back air pipes shall not be connected to the trap or branched into the waste pipe except where a continuous vent is not practicable, but a suitable non-siphon trap may be used without a back air pipe upon the approval of the commissioner. Back air pipes shall enter the waste pipe within eighteen inches from the trap and shall be a continuation of the waste pipe. Lead air pipes may be used only for short connections where they are exposed to view. Air pipes for water-closet traps shall be connected to the highest point of bend or trap, and may be of two inch bore if for not more than three fixtures and less than thirty feet in length; if for more than three

Sect. 117.]

fixtures or more than thirty feet in length they shall be of three inch bore. Air pipes shall be run as direct as practicable and if one and one half inches or less in diameter shall not exceed thirty feet in length. Two or more air pipes may be connected together or with a vent pipe; but in every such case the connection shall be above the top of the fixture. The trap for the upper fixture on a line of soil or waste pipe, within five feet of the stack in a horizontal line, shall not require a special air pipe, unless the outlet is branched into a stack more than eighteen inches below the top water line of the trap. Diameters of vent pipe shall be not less than two inches for main vents through less than seven stories; three inches for water-closets on more than three floors, and for other fixtures in more than seven stories. All vent pipes shall be increased one inch in diameter before passing through the roof. Vent lines shall be connected at the bottom with a soil or waste pipe or with the drain, in such a manner as to prevent accumulation of rust scale and properly to drip the water of condensation. Offsets shall be made at an angle of not less than forty-five degrees. Soil pipes or iron waste pipes, vents and back air pipes, shall be supported by clamps to the woodwork, iron drive hooks to brick walls, or bolted clamps to iron girders.

#### NON-SIPHON TRAPS — ROUND TRAPS.

All traps, except for water-closets, not provided with special air pipes shall be suitable non-siphon traps and shall have at least a four inch water seal. Round traps shall be not less than four inches in diameter and eight inches long, and made of eight pound lead. All traps screws shall be water sealed.

#### CHEMICAL LABORATORIES.

Fixtures and waste pipes in chemical laboratories shall be installed in accordance with plans approved by the commissioner.

Sect. 117.]

## STABLES.

The drainage of stable fixtures shall be constructed according to plans approved by the commissioner.

## SECTION 118.

## BACK AIR PIPE.

In buildings where a series of bathrooms or kitchens are located directly over each other and have a common soil or waste-pipe, the back air pipe required shall be a vent line connecting with each outlet branch close to the water-closet connection or outlet from the sink trap, each branch vent to connect to vent line above the top of the highest fixture on each floor, the vent line to connect to main vent line above the top of the highest fixture in the building.

## BATTERIES OF WATER-CLOSETS.

In the case of batteries of water-closets or other fixtures the special air pipe from each trap may be omitted, provided that the soil or waste pipe, undiminished in size, is continued to a point above the roof or revented into the main soil pipe system above the top of the uppermost fixture.

The commissioner shall prepare explanatory sketches showing the method of construction described in this section.

## SECTION 119.

## REFRIGERATOR WASTES AND DRIP PIPES.

All drip or overflow pipes shall be extended to some place in open sight, and in no case shall any such pipe be connected directly with the drain pipe. No waste pipe from a refrigerator or other receptacle in which provisions are stored shall be connected directly with a drain or other waste pipe. The waste pipes from all other fixtures shall be connected directly with a drain pipe. Refrigerator

Sect. 119.]

wastes connecting with two or more stories shall be supplied with a trap on the branch for each floor and extended through the roof.

## SECTION 120.

## WATER-CLOSETS, ETC.

Every water-closet or line of water-closets shall be supplied with water from a tank or cistern, and shall have a flushing pipe of not less than one and one quarter inches in diameter. Privy vaults shall be of brick and cement of a capacity of not less than fifty cubic feet, of easy access, convenient to open, and clean, and water-tight. The inside shall be not less than two feet from the next lot and from any public or private way.

## SECTION 121.

## SOIL AND WASTE PIPES DIMENSIONS.

The diameters of soil and waste pipes shall be not less than those given in the following table:—

	Inches.
Soil pipes . . . . .	4
Main waste pipes . . . . .	2
Main waste pipes for kitchen sinks on five or more floors . . . . .	3
Branch waste pipes for laundry tubs . . . . .	$1\frac{1}{2}$
Branch waste for kitchen sinks . . . . .	$1\frac{1}{2}$
Branch waste for urinals . . . . .	$1\frac{1}{2}$
No branch waste for other fixtures shall be less than,	$1\frac{1}{4}$

## EXCEPTIONS

Except that, with the approval of the commissioner, a three-inch soil pipe may be used for one water-closet where it is not practicable to use a four-inch pipe.



Sect. 121.]

## FERRULES, CLEAN-OUTS, ETC.

Brass ferrules shall be of the best quality, bell-shaped, extra heavy cast brass, not less than four inches long and two and one quarter inches, three and one half inches, and four and one half inches in diameter, and of not less than the following weights:—

Diameters.	Weights.	
$2\frac{1}{2}$ inches . . . . .	1 pound	0 ounces.
$3\frac{1}{2}$ inches . . . . .	1 pound	12 ounces.
$4\frac{1}{2}$ inches . . . . .	2 pounds	8 ounces.

One and one-half inch ferrules shall not be used.

## SOLDERING NIPPLES.

Soldering nipples shall be of heavy cast brass or of brass pipe, iron pipe size. If cast, they shall be of not less than the following weights:—

Diameter.	Weights.	
$1\frac{1}{2}$ inches . . . . .	0 pounds	8 ounces.
2 inches . . . . .	0 pounds	14 ounces.
$2\frac{1}{2}$ inches . . . . .	1 pound	6 ounces.
3 inches . . . . .	2 pounds	0 ounces.
4 inches . . . . .	3 pounds	8 ounces.

## CLEAN-OUTS — SCREW CAPS.

Where clean-outs are used the screw cap shall be of brass, extra heavy and not less than one eighth of an inch thick. The engaging parts shall have not less than six threads of iron pipe size and shall be tapered. Clean-outs shall be full size of trap up to four inches in diameter and not less than four inches for larger traps.

The screw caps shall have a solid square or hexagonal nut not less than one half inch high, with a least diameter of one and one half inches. The bodies of brass clean-out ferrules shall be at least equal in weight and thickness to the calking ferrule for the same size of pipe.

Sect. 121.]

## LEAD PIPES. USE RESTRICTED.

The use of lead pipes is restricted to short branches of the soil and waste pipes, bends and traps, and roof connections of inside leaders. "Short branches" of lead pipe shall mean not more than:—

5 feet of  $1\frac{1}{4}$  inch pipe.5 feet of  $1\frac{1}{2}$  inch pipe.

4 feet of 2 inch pipe.

2 feet of 3 inch pipe.

2 feet of 4 inch pipe.

## LEAD PIPE — WEIGHT — THICKNESS.

The pipe shall be not less than the following average thickness and weight per linear foot:—

Diameters.	Thicknesses.	Weights per Linear Foot.
$1\frac{1}{4}$ inches	— —	2.50 pounds.
$1\frac{1}{2}$ inches	.14 inch	2.68 pounds.
2 inches	.15 inch	3.61 pounds.
$2\frac{1}{2}$ inches	.20 inch	5.74 pounds.
3 inches	.20 inch	5.74 pounds.
3 inches	.21 inch	7.54 pounds.
$3\frac{1}{2}$ inches	.22 inch	9.00 pounds.
4 inches	.23 inch	10.66 pounds.
$4\frac{1}{2}$ inches	.24 inch	12.34 pounds.
5 inches	.25 inch	14.50 pounds.
6 inches	.28 inch	18.76 pounds.
7 inches	.30 inch	23.27 pounds.
8 inches	.32 inch	28.18 pounds.
9 inches	.34 inch	33.70 pounds.
10 inches	.36 inch	40.06 pounds.
11 inches	.37 inch	45.02 pounds.
12 inches	.37 inch	48.98 pounds.

Sect. 121.]

## BRASS PIPE.

Brass pipe for soil, waste, vent and back air pipes shall be thoroughly annealed, seamless, drawn brass tubing, of not less than number thirteen Stubbs gauge.

## LEAD AND IRON PIPE UNIONS — CONNECTIONS.

No slip joint or unions shall be used on traps, waste vents or back air pipes. Threaded connections on brass traps shall be of the same size as pipe threads for the same size of pipe, and shall be tapered. Connections between lead and iron shall be made by brass sleeves or screw nipples wiped to the lead and calked or screwed into the iron.

## BRASS PIPE.

The following average thicknesses and weights per linear foot shall be used:—

Diameters.	Thicknesses.	Weights per Linear Foot.
1½ inches	.14 inch	2.84 pounds.
2 inches	.15 inch	3.82 pounds.
2½ inches	.20 inch	6.08 pounds.
3 inches	.21 inch	7.92 pounds.
3½ inches	.22 inch	9.54 pounds.
4 inches	.23 inch	11.29 pounds.
4½ inches	.24 inch	13.08 pounds.
5 inches	.25 inch	15.37 pounds.
6 inches	.28 inch	19.88 pounds.

## CAST IRON PIPES, ETC.

Cast iron pipes shall be uncoated, sound, cylindrical and smooth, free from cracks and other defects, of uniform thickness and of the grade known to commerce as "extra heavy." If buried under ground they shall be coated with asphaltum or red lead.

Sect. 121.]

Pipe, including the hub, shall weigh not less than the following average weights per linear foot:—

DIAMETERS.	Weights per Linear Foot.	DIAMETERS.	Weights per Linear Foot.
2 inches.....	5½ pounds.	7 inches (not stock size),	27 pounds.
3 inches.....	9½ pounds.	8 inches.....	33½ pounds.
4 inches.....	13 pounds.	10 inches.....	45 pounds.
5 inches.....	17 pounds.	12 inches.....	54 pounds.
6 inches.....	20 pounds.		

All joints shall be made with picked oakum and molten lead run full and be made gas tight. No cement joints nor connections between iron and cement or tile pipe or brick drains shall be made within any building.

#### WROUGHT IRON PIPE.

Galvanized wrought iron pipe shall be of not less than the following thickness and weight per linear foot:—

Diameters.	Thicknesses.	Weights per Linear Foot.
1½ inches	.14 inch	2.68 pounds.
2 inches	.15 inch	3.61 pounds.
2½ inches	.20 inch	5.74 pounds.
3 inches	.21 inch	7.54 pounds.
3½ inches	.22 inch	9.00 pounds.
4 inches	.23 inch	10.66 pounds.
4½ inches	.24 inch	12.34 pounds.
5 inches	.25 inch	14.50 pounds.
6 inches	.28 inch	18.76 pounds.
7 inches	.30 inch	23.27 pounds.
8 inches	.32 inch	28.18 pounds.
9 inches	.34 inch	33.70 pounds.
10 inches	.36 inch	40.06 pounds.
11 inches	.37 inch	45.02 pounds.
12 inches	.37 inch	48.98 pounds.

Sect. 121.]

## EXTRA HEAVY.

The threaded part of the pipe if less than one and one half inches long shall be of the thickness and weight known as "extra heavy" or "extra strong."

## FITTINGS.

Fittings on wrought iron vent or back air pipes shall be galvanized recessed cast iron threaded fittings. Fittings for "Plumber's tubing" shall be heavy weight with sharp threads.

Fittings for waste or soil or refrigerator waste pipes of wrought iron or brass pipe shall be galvanized cast iron, or brass, recessed, and threaded drainage fittings, with smooth interior waterway and threads tapped so as to give a uniform grade to branches of not less than one quarter of an inch per foot.

## JOINTS.

All joints on wrought iron or brass pipe shall be screwed joints made up with red lead, and any burr formed in cutting shall carefully be reamed out.

## SECTION 122.

## DRAIN PIPES, ETC.

Drain and connecting ventilation pipes, vents and back air pipes shall be of sufficient size, and made of extra heavy cast iron pipe if under ground, and if above ground shall be made of extra heavy cast iron galvanized wrought iron of standard weight, or of not less than number thirteen Stubbs gauge brass pipe within the building, except that lead pipes may be used for short connections exposed to view. Cast iron drains shall extend not less than ten feet from the inside face of the wall beyond and away from the building.

Sect. 122.]

Drain pipes above ground shall be secured by iron to walls suspended from floor timbers by strong iron hangers or supported on brick piers. Proper manholes shall be supplied to reach clean-outs and traps. Every drain pipe shall have a fall of not less than one quarter inch per foot and shall be extended from a point ten feet outside the inside face of the wall unobstructed to and through the roof undiminished in size and to a height not less than two feet above the roof and not less than one foot above the top of any window within fifteen feet and not less than eight feet above the roof if the roof is used for drying clothes or as a roof garden. The drain pipe shall be supplied with a Y branch fitted with a brass clean-out or with an iron stopper if required on the direct run at or near the point where the drain leaves the building. Changes in direction shall be made with curved pipes and all connections with horizontal or vertical pipes shall be made with Y branches. Saddle hubs shall not be used. All drain pipes shall be exposed to sight within the building if such exposure is practicable, and shall not be exposed to pressure where they pass through the wall.

#### STEAM EXHAUSTS, ETC.

No steam or vapor or water of a temperature over one hundred and thirty degrees Fahrenheit shall be discharged from any premises into any sewer, drain or catch-basin, nor shall any matter or thing be discharged into any sewer which may tend to cause an obstruction of the public sewer or a nuisance or a deposit therein or any injury thereto.

#### *Blow-off Tanks.*

All high pressure steam boilers shall be connected with a blow-off tank of a capacity not less than thirty per cent

Sect. 122.]

of the largest boiler connected with such tank. The location of and the connections to said blow-off tank shall be subject to the approval of the superintendent of sewers.

#### *Steam Exhausts.*

No steam exhaust or steam drip, unless it be provided with a cooling tank of a capacity approved by the superintendent of sewers, or unless it be connected with the blow-off tank, shall connect with any drain leading to the sewer. Every blow-off tank shall be supplied with a vapor pipe not less than two inches in diameter which shall be carried above the roof and above the highest windows of the building.

#### *Blow-off Tanks.— Additional Requirements.— Rain Water Leaders.*

The superintendent of sewers may require such additional means for cooling the blow-off tanks by the injection of cold water or otherwise as may be necessary to reduce the temperature of the water passing from the blow-off tank so that it shall not exceed one hundred and thirty degrees Fahrenheit. All buildings shall have leaders sufficient to discharge the roof water in such a manner as not to flow upon public way or any neighboring property. Such leaders may project into a public way not over seven inches.

[1923, c. 462, sect. 25.]

### SECTION 123.

#### SPECIAL TRAPS, ETC.

##### *Grease.— Gasolene*

Every building from which, in the opinion of the superintendent of sewers, grease may be discharged in such quantity as to clog or injure the sewer, shall have a special

Sect. 123.]

grease trap satisfactory to the superintendent of sewers. Every building in which gasolene, naphtha or other inflammable compounds are used for business purposes shall be provided with a special trap, satisfactory to the superintendent of sewers, so designed as to prevent the passage of such material into the sewer, and ventilated with a separate pipe rising to a point four feet above the roof. All non-siphon traps shall be of a type approved by the commissioner. The waste pipe of every wash stand for vehicles shall be provided with a sand box of sufficient capacity.

The waste pipe from the sink of every hotel, eating house, restaurant or other public cooking establishment, shall be connected to a grease trap of sufficient size, easily accessible to open and clean, placed as near as practicable to the fixtures that it serves.

## SECTION 124.

### ROOF LEADERS AND SURFACE DRAINS.

Rain water leaders when connected with house drains shall be suitably trapped and, within the proposed surface drainage area, shall not be connected at the top of the stack, nor extended down through the interior of the building, except by special permit from the commissioner. Wherever a surface drain is installed in a cellar or basement, it shall be provided with a deep seal trap and back water valve. Drain pipes from fixtures in cellars and basements liable to back flow from a sewer shall be supplied with back water valves.



## SECTION 125.

HAZARDOUS BUILDINGS AND APPLIANCES FOR POWER AND  
HEAT.*Permits — Publications.*

\* (No building shall be used for a grain elevator or for storage or manufacture of high combustibles or explosives or for chemical or rendering works, without a permit from the commissioner, and) no engine, dynamo, boiler or furnace shall be placed in any building without a permit from the commissioner. Every application for such permit shall be in writing, shall be filed with the commissioner and shall set forth the character of the building, the size, power and purpose of the apparatus, and such other information as the commissioner may require. The commissioner may, after an examination of the premises described in the application, and after hearing the applicant and any objectors, issue a permit for placing a boiler or furnace on such premises, upon such conditions as he shall prescribe, or he may refuse such permit. If the application is for anything other than a boiler or furnace the applicant shall publish in at least two daily newspapers published in the city of Boston, and on at least three days in each, and, if so directed by the commissioner, shall also post conspicuously on the premises a copy of the application, and shall deliver copies thereof to such persons as the commissioner may designate.

If no objection is filed with the commissioner before the expiration of ten days after the time of the first publication of notice, or within ten days of the delivery and

---

\* Portion in parenthesis superseded by c. 795, sects. 3, 6, 7 and 29 of Acts of 1914, Fire Prevention Act.

Chapter 795 superseded by General Laws, Chapter 148.

Sect. 125.]

first posting of the notice, if such delivery or posting is required the commissioner shall if the arrangement, location and construction of the proposed apparatus is proper and in accordance with the provisions of this act, issue a permit for the same. If objection is filed the application shall be referred to the board of appeal which may in its discretion require the deposit by the objector of a reasonable sum as security for the payment of the costs.

After such notice as the board shall order it shall hear the same and shall direct the commissioner to issue a permit under such conditions as it may prescribe, or to withhold the same. If the permit is refused, the applicant and if it is granted the objectors shall pay such costs as the board may order.

The commissioner may, from time to time, after public notice and hearing, prescribe the conditions on which furnaces, boilers, or other steam generators and hot water heaters may be maintained in buildings, and, if any person interested objects to such conditions and appeals from his decision establishing the same, the appeal shall be referred to the board of appeal, and thereupon said board shall prescribe the conditions.

[See General Laws, Chapter 148.]

[1923, c. 462, sect. 26.]

## SECTION 126.

### COMBUSTIBLE MATERIALS.

#### *Storage Prohibited.*

No building adapted for habitation, nor any part thereof, nor the lot upon which it is located, shall be used as a place for the storage, keeping or handling of any combustible article, except under such conditions as may be prescribed by the fire commissioner. No such building

Sect. 126.]

nor any part thereof, nor of the lot upon which it is located, shall be used as a place for the storage, keeping or handling of any article dangerous or detrimental to life or health, nor for the storage, keeping or handling of feed, hay, straw, excelsior, cotton, paper stock, feathers or rags.

[Superseded by 1914, c. 795, sects. 6, 7, Fire Prevention Act.]  
Chapter 795, superseded by General Laws, Chapter 148.

## SECTION 127.

### ENFORCEMENT OF ACT.

#### *Safety of Building — Owner Responsible.*

Every structure and part thereof and appurtenant thereto shall be maintained in such repair as not to be dangerous. The owner shall be responsible for the maintenance of all buildings and structures. The lessee under a recorded lease, also executor, trustee, administrator, or agent with power of attorney, shall be deemed the owner under the provisions of this act.

## SECTION 128.

### POWERS OF THE BOARD OF HEALTH.

#### *Limitation of Number of Occupants in Habitation.*

The board of health may by vote limit the number of occupants who shall be permitted to dwell in any building or in any part or parts thereof. They shall cause a copy of any such vote to be served upon the owner of the building, his agent, tenant or other persons having the charge thereof. If the owner, agent, tenant, or other persons having charge of said building allow or permit more people than are permitted by said vote to occupy the building or any part or parts thereof, said board may order the premises to be vacated, and they shall not again be occupied without the permission of the board, and the owner, agent, tenant or other persons having charge of said

Sect. 128.]

building shall forfeit not more than twenty dollars for every day during which he violates such order. The board may make such further regulations as to overcrowding, ventilation, the construction of water-closets, the lighting of hallways, and the occupation of buildings or parts thereof, not inconsistent with other laws, as they may deem proper. Said board may permit rooms in private stables to be occupied for sleeping purposes by grooms and coachmen.

#### *Ashes — Garbage.*

No person shall place ashes, rubbish, garbage, refuse or other matter in the yards, open areas or alleys connected with or appurtenant to any such building except in suitable receptacles provided for the same.

Every building used for habitation by more than two families and every lodging house shall be carefully inspected at least twice a year under the direction of the board of health, and whenever said board has made an order concerning such a building a reinspection shall be made within ten days after the board has been informed that the order has been complied with.

[1913, c. 586, sect. 1.]

### SECTION 129.

#### ENFORCEMENT — JURISDICTION IN EQUITY.

##### *On Application of City Attorney.*

Any court having jurisdiction in equity or any justice thereof, shall upon the application of the city by its attorney, have jurisdiction in equity:—

##### *Injunction Restraining Use.*

To restrain the construction, alteration, repair, maintenance, use or occupation of a building, structure or other

Sect. 129.]

thing constructed or used in violation of the provisions of this act, and to order its removal or abatement as a nuisance;

*Restraining Construction, Use, etc.*

To restrain the further construction, alteration, repair, maintenance, use or occupation of a building, structure or other thing, which is unsafe or dangerous;

To restrain the unlawful construction, alteration, repair, maintenance, use or occupation of any building, structure or other thing;

To compel compliance with the provisions of this act;

To order the removal by the owner of a building, structure or other thing unlawfully existing, and to authorize the commissioner, with the written approval of the mayor, in default of such removal by the owner, to remove it at the owner's expense.

*Board of Appeal Decisions, Court May Review.*

Any person, the value of whose property may be affected by any decision of the board of appeal, may have the action of said board reviewed by the court by any appropriate process, provided that proceedings are instituted within thirty days after the date of such decision.

The person applying for the review shall file a bond with sufficient surety, to be approved by the court, for such sum as shall be fixed by the court, to indemnify and save harmless the person or persons in whose favor the decision was rendered from all damages and costs which they may sustain in case the decision of said board is affirmed.

In case the decision of the board is affirmed the court, on motion, shall assess damages, and execution shall issue therefor.

*Right to Enter Any Building.*

Any person having any duty to perform under the provisions of this act may, so far as may be necessary for the performance of his duties, enter any building or premises in the city of Boston.

SECTION 130.

JURISDICTION AT LAW.

The municipal court of the city of Boston, concurrently with the superior court, shall have jurisdiction throughout the city of prosecutions and proceedings at law under the provisions of this act, and also of all provisions of law relative to plumbing and gas-fitting.

SECTION 131.

PROCEDURE.

Under the entry of any case brought under the provisions of this act the court shall, at the request of either party, advance the case, so that it may be heard and determined with as little delay as possible.

SECTION 132.

NUISANCE.

*Any Building Erected or Maintained in Violation of this Act.*

A building or structure which is erected or maintained in violation of the provisions of this act shall be deemed a common nuisance without other proof thereof than proof of its unlawful construction, and the commissioner may abate and remove it in the same manner in which boards of health may remove nuisances under the provisions of

Sect. 132.]

sections sixty-seven, sixty-eight and sixty-nine of chapter seventy-five of the Revised Laws.\*

Whoever violates any provision of this act, or whoever builds, alters, or maintains any structure or any part thereof in violation of any provision of this act, shall be punished by a fine not exceeding five hundred dollars, except as hereinbefore provided.

[1913, c. 586, sect. 2. See R. L., c. 104.]

\* The provisions of sects. 67, 68 and 69 of c. 75, R. L., have been superseded by General Laws, c. 111, sects. 123, 124, 125.

### SECTION 133.

#### REPEALS.

So much of chapter four hundred and nineteen of the acts of the year eighteen hundred and ninety-two and of all acts in amendment thereof as is unrepealed is hereby repealed. So much of any other act as is inconsistent herewith is hereby repealed.

### SECTION 134.

This act shall take effect upon the first day of August in the year nineteen hundred and seven.

[*Approved June 22 1907.*]





# APPENDICES.

## TITLE OF ACTS IN CHRONOLOGICAL ORDER.

---

- 1873, Chap. 4. An Act to Authorize the Erection of Wooden Buildings in the City of Boston for Sanitary Purposes.
- 1889, Chap. 129. An Act Relating to Buildings in the Public Parks of the City of Boston.
- 1893, Chap. 462. An Act to Authorize the Establishment of a Building Line on Public Ways. (Restrictions as to Building.)
- 1897, Chap. 219. An Act to Provide for the Protection of the Public Health in the City of Boston. (Buildings May be Vacated or Torn Down.)
- 1897, Chap. 265. An Act Relative to the Licensing of Gas Fitters and to the Supervision of the Business of Gas Fitting in the City of Boston.
- 1898, Chap. 452. An Act Relative to the Height of Buildings on and near Copley Square, in the City of Boston.
- 1899, Chap. 457. An Act to Limit the Height of Buildings in the Vicinity of the State House. (Height Limit, Seventy Feet.)
- 1902, Chap. 543. An Act Relative to the Improvement of the State House and to the Height of Buildings on Beacon Street and Bowdoin Street in the City of Boston.
- 1904, Chap. 333. An Act Relative to the Height of Buildings in the City of Boston.

- 1905, Chap. 383. An Act Relative to the Height of Buildings in the City of Boston.
- 1907, Chap. 416. An Act Relative to the Height of Buildings on Rutherford Avenue in the City of Boston. (Height Limit One Hundred Feet.)
- 1907, Chap. 463. An Act Relative to the Licensing of Theatres and Public Halls in the City of Boston.
- 1910, Chap. 284. An Act Relative to the Construction, Alteration, Inspection and Maintenance of Buildings in the City of Boston. (Building Department to Enforce Building Laws in Boston Heretofore Enforced by District Police.)
- 1910, Chap. 571. An Act to Authorize the Collection of fees for Permits and Licenses Issued by Departments of the City of Boston.
- 1911, Chap. 342. An Act to Regulate the Construction of Garages in the City of Boston.
- 1912, Chap. 259. An Act Relative to the Construction of Garages in the City of Boston.
- 1913, Chap. 280. An Act to Authorize the Mayor of the City of Boston to Grant Permits for Special Moving Picture Exhibitions in Churches, Halls, or Other Buildings.
- 1913, Chap. 577. An Act to Regulate the Erection and Maintenance of Garages in the City of Boston.
- 1913, Chap. 729. An Act Relative to Dry Houses in the City of Boston.
- 1914, Chap. 782. An Act to Amend the Building Law of the City of Boston. Elevators Hereafter Erected to be Enclosed in Shafts, etc.
- 1914, Chap. 786. An Act Exempting a Certain Parcel of Land in the City of Boston from Restrictions as to Height of Buildings, Washington Street, corner Lovering Place.

- 1915, Special Act, Chap. 254. An Act Relative to the Erection of Buildings in the City of Boston. Making the Use of Certain Buildings Lawful.
- 1915, Special Act, Chap. 306. An Act Relative to the Shirley-Eustis Mansion on Shirley Street in the City of Boston.
- 1915, Special Act, Chap. 333. An Act Relative to the Height of Buildings in the City of Boston. Revising Boundaries of Districts A and B.
- 1916, Special Act, Chap. 86. An Act Relative to the Use of Public School Property of the City of Boston for Social, Civic and Other Purposes.
- 1918, Special Act, Chap. 115. An Act to Allow Metal Garages of Limited Size in Certain Sections of the City of Boston.
- 1919, Special Act, Chap. 32. An Act to Require the Registration of Hospitals in the City of Boston.
- 1919, Special Act, Chap. 163. An Act Relative to the Construction, Alteration and Maintenance of Hospitals in the City of Boston.
- 1920, Chap. 298. An Act Relative to the Operation of Elevators by Minors.
- 1920, Chap. 455. An Act Relative to the Limitation in Height of Buildings, on Land, between Dartmouth Street and Trinity Place, in the City of Boston.
- 1920, Chap. 645. An Act Relative to Automatic Sprinklers in Tenement Houses in the City of Boston.
- 1921, Chap. 109. An Act Exempting Certain Buildings in the City of Boston from the Laws Relative to Fire Protection in Stables for Horses and Mules.
- 1921, Chap. 137. An Act to Establish Harbor Lines in South Bay in the City of Boston.
- 1921, Chap. 298. An Act Relative to the Operation of Elevators by Minors.

- 1922, Chap. 61. An Act Relative to Sanitary Arrangements in Tenement Houses in the City of Boston.
- 1922, Chap. 316. An Act Relative to Garages in the City of Boston. Approved by Mayor May 1, 1922.
- 1923, Chap. 27. An Act Exempting a Certain Parcel of Land of the Massachusetts General Hospital, in the City of Boston, from Restrictions as to the Height of Buildings.
- 1923, Chap. 278. An Act Requiring the Installation of Standpipes and Other Equipment in Certain Buildings in the City of Boston.
- 1924, Chap. 332. An Act Providing for the Appointment of Special Night Elevator Inspectors and the Inspection of Passenger Elevators at Night in the City of Boston.
- 1924, Chapter 488. An Act Regulating and Restricting the Use of Buildings and Premises, the Height and Bulk of Buildings, and the Occupancy of Lots in the City of Boston and for said Purposes Dividing the City into Districts.
- General Laws, Chap. 4, Sect. 7. Definition — Statutes. Meaning of Certain Words in Construing Same.
- General Laws, Chap. 45, Sects. 7-11. Public Parks, Playgrounds and the Public Domain. Building Line, Height of Buildings on Parkway, Buildings on Parks.
- General Laws, Chap. 49, Sect. 21. Spite Fences in Excess of 6 Feet in Height.
- General Laws, Chap. 82, Sect. 37. Building Lines.
- General Laws, Chap. 83, Sect. 5. Storm Water. Separate Systems of Plumbing.
- General Laws, Chap. 85, Sects. 8 and 9. Signs and Other Structures Projecting into Ways.
- General Laws, Chap. 139, Sects. 1 and 3. Common Nuisances. Burnt or Dangerous Buildings.

General Laws, Chap. 140, Sects. 33, 35, 38, 40. Licenses, Public Lodging Houses.

General Laws, Chap. 142. Supervision of Plumbing.

General Laws, Chap. 143. Inspection, Regulation and Licenses for Buildings, Elevators and Cinematographs.

General Laws, Chap. 148. Fire Prevention.

General Laws, Chap. 149, Sect. 126. Doors not to be Locked During Working Hours in Operative Buildings.

General Laws, Chap. 184, Sect. 15. General Provisions Relating to Real Property Proceedings Affecting Title to Realty Binding on Third Parties.

General Laws, Chap. 272, Sect. 86. Stables. Exits. Sprinklers.

Revised Ordinances of 1911, Chap. 41. Concerning the Building limits.

Revised Ordinances of 1914, Chap. 8. Concerning Control of Building Operations, Person in Charge to be Licensed.

---

#### CHAPTER 4, ACTS OF 1873.

AN ACT TO AUTHORIZE THE ERECTION OF WOODEN BUILDINGS IN THE CITY OF BOSTON FOR SANITARY PURPOSES.

*Be it enacted, etc.*

SECTION 1. The City of Boston is hereby authorized to erect, under directions of its board of health and inspector of buildings, any wooden buildings within the city, for hospital purposes, the same to remain only so long as said board deems it necessary: *provided*, that every such hospital shall be constantly guarded outside by a competent force of at least three of the police of said city.

SECT. 2. This act shall take effect upon its passage.

[January 28, 1873.]

## CHAPTER 129, ACTS OF 1889.

AN ACT RELATING TO BUILDINGS IN THE PUBLIC PARKS  
OF THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. The park commissioners of the city of Boston may erect in the parks of said city that now are or hereafter may be under their control, except the common, public garden and public squares, structures for the shelter and refreshment of persons frequenting such parks, and for other park purposes, of such materials and in such places as in the opinion of the fire commissioners of said city do not endanger buildings beyond the limits of the park. Section sixteen of chapter fifty-four of the Public Statutes and chapter three hundred and seventy-four of the acts of the year eighteen hundred and eighty-five shall not apply to such buildings.

SECT 2. This act shall take effect upon its passage.

*[Approved March 18, 1889.]*

NOTE.— See Gen. Laws, chap. 45, sects, 7 and 11.

---

## CHAPTER 462, ACTS OF 1893.

AN ACT TO AUTHORIZE THE ESTABLISHMENT OF A  
BUILDING LINE ON PUBLIC WAYS.

*Restrictions as to Building.*

SECTION 1. The board or officers having authority to lay out city or town ways may in the manner prescribed by law for giving notice of an intention to lay out any such way, give notice of an intention to establish a building line parallel to, and not more than twenty-five feet distant from, any exterior line of a highway or city or town way, and after said notice may pass a vote establishing such building line, and in the case of a city, upon the

recording of said vote in the records of the city, or in a town, upon the acceptance of said vote by the inhabitants of the town at a town meeting called as provided for by law, said building line shall be established; and until another building line shall thereafter be established in the same manner, no structure shall thereafter be erected, placed or maintained between such building line and such way, except that steps, windows, porticos and other usual projections appurtenant to the front wall of a building may be allowed in such restricted space to the extent prescribed in the vote establishing such building line.

#### *Damages.*

SECT. 2. Any person sustaining damage by reason of the establishment of such building line shall have the same remedies for obtaining payment therefor as may be prescribed by law for obtaining payment for damages sustained by the laying out of a highway in such city or town.

SECT. 3. This act shall take effect in any city when accepted by the city council thereof, and in any town when accepted by a majority of the legal voters thereof present and voting thereon at a town meeting called for that purpose.

[Approved June 9, 1893.]

#### *Building Lines Established.*

1. Beacon street, River street to Beaver street, January 5, 1895.

2. Beacon street (both sides), Arlington street to Massachusetts avenue, January 5, 1895.

3. Beacon street (northerly side), between Somerset street and Bowdoin street, November 6, 1900.

4. Boylston street, Back Bay Fens to Brookline avenue, October 4, 1894.

5. Beach street, West Roxbury (northeast side), between Centre street and railroad, February 29, 1916.



6. *Commonwealth Avenue — Building Line — Establishment of.*

Date of establishment.— August 3, 1896.

By whom established.— Board of Park Commissioners.

Where recorded.— Park Commissioner — Vol, 9. page 24.

Where recorded.— Suffolk County Registry of Deeds — Lib. 2386, Vol. 11.

Authorized.— Under chapter 462 of Acts of 1893 and chapter 313 of Acts of 1896.

Portion of avenue where line was established: On each side of avenue, from Arlington street to Beacon street.

Distance.— Parallel to the exterior lines of said avenue, and distant 20 feet therefrom.

Shown on Plan.— In two sections by W. C. Bates, C. E., dated July 27, 1896. Plan filed in Park Office — was not recorded at Registry of Deeds.

Height of Buildings.— Fixed by section 16, chapter 28 of the Revised Laws. Extreme height to which buildings may be erected shall be 70 feet exclusive of such steeples, towers, domes, cornices, parapets, balustrades, sculptured ornaments, chimneys and roofs as such Board may approve.

Copy of vote of Board of Park Commissioners:

*Voted,* That a building line be and is, under the provision of chapter 462 of the Acts of the year 1893, and chapter 313 of the Acts of the year 1896, hereby established on each side of Commonwealth avenue, from Arlington street to Beacon street, parallel to the exterior line of said avenue, and distant twenty feet therefrom as shown on a plan of said avenue in two sections, dated July 27, 1896, signed by W. C. Bates, civil engineer, and filed in the office of this Board, and this Board does hereby prescribe that existing steps, windows, porticos and other usual projections appurtenant to the front wall of existing buildings, so far as they lie between such building line and said

Commonwealth avenue, may remain as they are at the date of this order, intending hereby to sanction all projections over said line including any necessary foundations and wall supporting said projections; and do hereby further prescribe as to future buildings, that no projections of any kind (other than doorsteps and balustrades connected therewith, and cornices at the roof of building) will be allowed to extend more than five feet into the space between said line and Commonwealth avenue, and that no projection in the nature of a bay window, circular front, or octagon front with the foundation wall sustaining the same (such foundation wall being a projection of front wall) will be allowed unless any horizontal section of such projection would fall within the external lines of a trapezoid whose base upon the rear line of the aforesaid space does not exceed eighteen feet in any case, and whose side lines make an angle of forty-five degrees with the base.

*Takings by Park Department.*

7. June 29, 1894, the Board of Park Commissioners voted (for the purpose of connecting the Boston Common and Public Garden with the Back Bay Fens) to take all that part of said Commonwealth avenue which is bounded northwesterly by Beacon street, northerly by the northerly line of said avenue, easterly by Arlington street and southerly by the southerly line of said avenue; this under and by virtue of the power conferred on said Board by chapter 300 of the Acts of 1893.

8. On Oct. 14, 1905, the custody, care and improvement of so much of Commonwealth avenue as lies between Brighton and Chestnut Hill avenues, were placed in the Park Department by amending Section 1 of Chapter 28 of Revised Ordinances of 1898.

9. On Dec. 20, 1905, the portions of Commonwealth avenue, between Beacon street and Brighton avenue, and between Chestnut Hill avenue and the Newton line, were placed in the Park Department by amending Chapter two (2) of the City Ordinances of 1905.

10. Columbia road, Edward Everett square to the railroad. Established by park commissioners.

11. Columbia road (southeast side), Hamilton street to Richfield street, January 28, 1915.

12. Grove street, West Roxbury (both sides), between Washington street and Centre street, March 9, 1916.

13. Jersey street, July 15, 1898; Landsdowne street, November 7, 1906.

14. Peterborough street, February 1, 1901.

15. Queensberry street, July 15, 1897.

[See General Laws, Chapter 82, Section 37, which seems to supersede the above act, viz., chapter 462, Acts of 1893.]

### *Parkways.*

There is a twenty-five foot building line on the following locations (established by the Park Commissioners):

Riverway, from Longwood avenue to Huntington avenue.

Jamaicaway, from Huntington avenue to Prince street.

Arborway, from Prince street to Forest Hills street, with the exception of two lots on Weld park.

Northwesterly boundary of Olmsted park, from Chestnut street to line of land of Henrietta S. Sargent.

West Roxbury Parkway on southerly boundary, from Walter street to Weld street; on westerly and a part of northerly boundary. See Suffolk Registry, Lib. 2384, Fol. 153 and Lib. 2730, Fol. 359.

NOTE.— See chapter 5, Ordinance of 1922 as amended by Ordinances of 1923, sections 2 and 8.

## CHAPTER 219, ACTS OF 1897.

## AN ACT TO PROVIDE FOR THE PROTECTION OF THE PUBLIC HEALTH IN THE CITY OF BOSTON.

*Buildings may be Vacated or Torn Down.*

SECTION 1. Whenever the board of health of the city of Boston shall be of the opinion that any building or any part thereof in said city is infected with contagious disease, or by reason of want of repair has become dangerous to life, or is unfit for use because of defects in drainage, plumbing, ventilation or in the construction of the same, or because of the existence of a nuisance on the premises which is likely to cause sickness among its occupants, said board may issue an order requiring all persons therein to vacate or cease to use such building or part thereof stated in the order, for reasons to be stated therein as aforesaid. Said board shall cause said order to be affixed conspicuously to the building or part thereof: and to be personally served on the owner, lessee, agent, occupant or any person having the charge or care thereof, if the owner, lessee or agent cannot be found in the said city, or does not reside therein, or evades or resists service, then said order may be served by depositing a copy thereof in the post office of said city postpaid and properly enclosed and addressed to such owner, lessee or agent at his last known place of business or residence. Such building or part thereof shall be vacated within ten days after said order shall have been posted and mailed as aforesaid, or within such shorter time, not less than forty-eight hours, as in said order may be specified, and said building shall be no longer used; but whenever said board shall become satisfied that the danger from said building or part thereof has ceased to exist, or that said building has been repaired so as to be habitable, it may revoke said order. Whenever

in the opinion of the board of health any building or part thereof in said city is because of age, infected with contagious disease, defects in drainage, plumbing or ventilation, or because of the existence of a nuisance on the premises which is likely to cause sickness among its occupants, or among the occupants of other property in said city, or because it makes other buildings in said vicinity unfit for human habitation or dangerous or injurious to health, or because it prevents proper measures from being carried into effect for remedying any nuisance injurious to health, or other sanitary evils in respect of such other buildings, so unfit for human habitation that the evils in or caused by said building cannot be remedied by repairs or in any other way except by the destruction of said building or of any portion of the same, said board of health may order the same or any part thereof to be removed; and if said building is not removed in accordance with said order said board of health shall remove the same at the expense of the city.

[1899, c. 222, sect. 1.]

---

## CHAPTER 265, ACTS OF 1897.

AN ACT RELATIVE TO THE LICENSING OF GAS FITTERS  
AND TO THE SUPERVISION OF THE BUSINESS OF GAS  
FITTING IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

### *License Required — "Journeyman" Means.*

SECTION 1. No person, firm or corporation shall engage in or work at the business of gas fitting in the city of Boston after the first day of October in the year eighteen hundred and ninety-seven, either as employer or as a journeyman, unless such person, firm or corporation has received a license therefor in accordance with the provisions of this

act. The word "journeyman," as used in this act, shall be deemed to mean one who personally does any gas fitting or any work in connection therewith which would be subject to inspection under the provisions of this act.

*Examination Required — As to Qualifications.*

SECT. 2. Every person, firm or corporation desiring to engage in the business of gas fitting in the city of Boston shall make application therefor to the building commissioner, and shall at such time and place as may be designated by the board of examiners hereinafter provided for, to whom such application shall be referred, be examined as to his qualifications for such business.

*Board of Examiners.*

SECT. 3. The board of examiners shall consist of the building commissioner, the health commissioner, who shall be *ex officio* members of said board and serve without compensation, and a third member, who shall have been continuously engaged in business as a practical gas fitter during the five years next preceding the date of appointment. Said third member shall be chosen by said health commissioner annually, for a term ending on the first day of May of the year next ensuing, and he shall be allowed a sum not exceeding ten dollars for each day of actual service, to be paid from the treasury of the city of Boston.

*Date and Places for Holding Examinations.*

*Practical Knowledge Required.*

*Licenses — Fees for Same.*

SECT. 4. Said board of examiners shall, as soon as may be after the appointment of said third member, meet and organize by the selection of a chairman and clerk, and shall

then designate the times and places for the examination of all applicants desiring to engage in or work at the business of gas fitting in the city of Boston. Said board shall examine said applicants as to their practical knowledge of gas fitting, shall submit the applicant to some satisfactory form of practical test, and, if satisfied of the competency of the applicant, shall so certify to the building commissioner, who shall thereupon issue a license to such applicant, authorizing him to engage in or work at the business of gas fitting, first requiring him to register in the office of the said building commissioner his name, place of business or residence, license number, date of examination, and in what capacity licensed. In case of a firm or corporation, the examination of one member of the firm, or of the manager of the corporation, shall satisfy the requirements of this act. The fee for the license of any employing gas fitter shall be two dollars, and for a journeyman, fifty cents; and said license shall continue in force until revoked or cancelled, but shall not be transferable.

### *Inspectors of Gas Fitting.*

#### *Duties — Compensation — Cause of Removal.*

SECT. 5. The building commissioner shall appoint after the first day of October in the year eighteen hundred and ninety-seven, such a number of inspectors of gas fitting as the board of examiners may from time to time determine. Said inspectors shall be practical gas fitters of at least five years' continued practical experience, and shall, before appointment, be subject to an examination before the civil service commissioners. The compensation of said inspectors shall be determined by the building commissioner, subject to the approval of the mayor; and such inspectors shall hold office until removed by said commissioner, with the approval of the mayor, for malfeasance,

incapacity or neglect of duty. Said inspectors shall inspect all new work relating to gas fitting in new and in old buildings, the connections and use of such work, and shall report all violations of this act or of any act or ordinance relating thereto, which now exists or may be hereafter enacted or ordained; and they shall also perform such other appropriate duties as may be required by the building commissioner.

*License Number to be Displayed at Place of Business.*

SECT. 6. Every licensed gas fitter shall display his license number conspicuously at his place of business.

*Application to be Filed and Permit Required.*

*Materials and Workmanship Subject to Regulations.*

SECT. 7. On and after the first day of October in the year eighteen hundred and ninety-seven no building shall be piped or fitted for gas, nor shall any repairs be made in such pipings or fittings, nor fixtures placed, unless a permit shall be granted therefor by the building commissioner. Every licensed gas fitter desiring to perform any work relating to piping or fitting a building for gas, or to repair gas piping or fittings, or to place fixtures therein, shall file an application therefor at the office of the building commissioner, giving the correct location, name and address of the owner, the intended use and material of the building and a full and complete statement of the work proposed and material to be used, and shall, if required by said building commissioner, furnish a plan thereof, which shall be subject to his approval. All materials used and work performed under the provisions of this section shall be subject to such regulations as shall be made by the board of health and the building commissioner.



*Timbers, Beams or Girders Not to be Cut Into.*

*Meter to be Removed Only by Gas Company.*

SECT. 8. No gas pipe which may be introduced into any building shall be let into the timbers, beams or girders unless the same is placed within thirty-six inches of the end of said timber, beam or girder, and in no building shall the said pipes be let into the timbers, beams or girders more than two inches in depth. No person shall disconnect or remove any gas meter, except the duly authorized representative of the gas company owning such meter.

*Gas Brackets.*

SECT. 9. All gas brackets shall be placed at least three feet below any ceiling or woodwork, unless the same is properly protected by a shield, in which case the distance shall not be less than eighteen inches. Nothing in this act shall be construed to affect the operations of any gas company upon its own premises or upon its mains and surface pipes.

*Board of Health to Inspect Gas Fixtures and Appliances in Buildings.*

SECT. 10. The Board of Health of said city by its inspectors shall from time to time, as it deems proper, inspect the gas fixtures and appliances in any building and shall make such requirements relating thereto as it deems the public health requires, and the owner of such building shall comply with such requirements.

*Penalty for Violation of this Act.*

SECT. 11. Any person violating any of the provisions of this act shall be deemed guilty of a misdemeanor and

shall be subject to a fine of not exceeding one hundred dollars for each offence, and if such person has received a license under this act his license may be revoked by the building commissioner.

*Annual Report.*

SECT. 12. The building commissioner shall include in his annual report to the city council a report of the proceedings of the building department under this act, and shall include therein a report of the board of examiners appointed under this act, giving their proceedings during the year ending on the first day of February.

*Repeals.*

SECT. 13. All acts and parts of acts inconsistent herewith are hereby repealed.

SECT. 14. This act shall take effect upon its passage, except so far as is hereinbefore otherwise provided.

[Approved April 10, 1897.]

---

REVISED REGULATIONS.

PERTAINING TO GAS FITTING AND GAS FITTING MATERIALS,  
ADOPTED JULY 29, 1898, BY THE BOARD OF HEALTH  
AND THE BUILDING COMMISSIONER, TO TAKE EFFECT  
OCT. 1, 1898.— AMENDED AUG. 16, 1899.— AMENDED  
MARCH 12, 1918.— AMENDED JULY 9, 1923.—  
AMENDED JANUARY 8, 1924.

(Authorized by Chapter 265, Acts of 1897.)

---

*Notice of Repair of Leaks.*

SECTION 1. In all cases of repair of leaks, a notice giving the location and extent of all work performed shall be filed with the building commissioner immediately upon completion of the same.

*No Pipe or Fitting to be Concealed Until Approved.*

SECT. 2. No pipe or fitting shall be covered or concealed from view until approved by one of the gas fitting inspectors of the building department, or for twenty-four hours after notice has been given to the building commissioner.

*No Pipe to be Laid Subjected to Strain.*

SECT. 3. Pipes shall be run and laid to avoid any strain or weight on the same, except that of the fixtures.

*Outlets.— Number of Burners.*

SECT. 4. Outlets or fixtures shall be securely fastened; all outlets not covered by fixtures shall be left capped, and the number of burners for each outlet shall be marked on the builders' plan.

*Pipes to be Properly Protected.*

SECT. 5. Pipes laid in a cold or damp place shall be properly dripped, painted with two coats of red lead and boiled oil, or covered with felting satisfactory to the building commissioner.

*Swing Brackets.*

SECT. 6. Swing brackets shall have a globe or guard to prevent its burner from coming in contact with the wall. Bracket outlets shall be at least 2 inches from window or door casings.

*Stop-Pins.*

SECT. 7. Stop-pins to cocks shall be screwed into place.

*Cement Prohibited.*

SECT. 8. The use of gas fitters' cement is prohibited, except in putting fixtures together.

*Inside Service to be Tested.*

SECT. 9. Inside service shall be tested by the fitter who receives the permit to connect the service or meter.

*Service Pipe to Have Main Cock.*

SECT. 10. There shall be a main cock on the service pipe close to the foundation wall, one cock at the inlet side of each meter. When service pipes are over two inches brass or composition, seated valves shall be used.

*Final Test to be Made by Gas Fitter in Presence of Inspector.*

SECT. 11. There shall be a final test, by a gas fitter, of all fixtures and pipes by a column of mercury raised not less than two inches, which must stand five minutes; this test to be made in the presence of one of the gas-fitting inspectors of the building department; the gauge to be made of glass tubing of uniform interior diameter, and so constructed that both surfaces of the mercury will be exposed.

*Material of Gas-Pipe.*

SECT. 12. All gas-pipes shall be of wrought iron or steel, all fittings of malleable iron, except above two inches, when cast iron if not concealed will be allowed. All meter connections other than side flange type are to be made with rigid iron connections of a type approved by the board of health and the building commissioner.

SECT. 13. All fuel gas appliances whose safety depends upon a constant burning pilot light must be connected to a separate meter, or to a fuel meter, close to the meter.

*Risers.*

SECT. 14. No riser shall be left more than five feet away from the front foundation wall.

SECT. 15. Gas-pipes shall be run in according to the following scale: .

*Scale for Piping.*

Iron pipe, $\frac{3}{8}$ inch,	26 feet,	3 burners.
“ $\frac{1}{2}$ inch,	30 feet,	6 burners.
“ $\frac{3}{4}$ inch,	50 feet,	20 burners.
“ 1 inch,	70 feet,	35 burners.
“ $1\frac{1}{4}$ inches,	100 feet,	60 burners.
“ $1\frac{1}{2}$ inches,	150 feet,	100 burners.
“ 2 inches,	200 feet,	200 burners.
“ $2\frac{1}{2}$ inches,	300 feet,	300 burners.
“ 3 inches,	450 feet,	450 burners.
“ $3\frac{1}{2}$ inches,	500 feet,	600 burners.
“ 4 inches,	600 feet,	750 burners.

*Outside Piping of Brass a Fixture.*

When brass piping is used on the outside of plastering or woodwork, it shall be classed as fixture.

*Outlets and Risers.*

SECT. 16. Outlets and risers not provided with fixtures shall be properly capped.

*Outlets for Fixtures.*

SECT. 17. Outlets for fixtures shall not be placed under tanks, back of doors, or within three feet of any meter.

*Shields, When Required.*

SECT. 18. Gas-burners less than two feet from a plastered ceiling or less than three feet from overhead woodwork shall be protected by a shield satisfactory to building commissioner. In first class buildings no shields will be required.

*Brass Tubing.— Threads on Brass Pipe.— Rope or Square Tubing.*

SECT. 19. Brass tubing used for arms of fixtures shall be at least No. 18 standard gauge with full thread. All threads shall screw in at least  $\frac{5}{8}$  of an inch. Rope or square tubing shall be brazed or solldered into fittings and distributors, or have a nipple brazed into the tubing.

*Cast Fittings.— Plugs of Cocks.— Stems of Fixtures.— L-Burner Cocks.*

SECT. 20. Cast fittings such as cocks, swing joints, double centres and nozzles shall be standard fittings, except for factory use, where extra heavy or mill fittings shall be used. The plugs of all cocks must be ground to a smooth and true surface for their entire length, be free from sandholes, have not less than  $\frac{3}{4}$ -inch bearing on all cast fittings and  $\frac{1}{16}$  of an inch on all turned fittings, have two flat sides on the end for the washer and have two nuts instead of a tail screw. Stems of fixtures of two lights or more each shall be not less than  $\frac{1}{4}$  of an inch iron-pipe size. L-burner cocks shall not be used at the end of chandelier arms, except in stores, churches, theatres, halls, and places of assembly or public resorts.

*Outlets for Gas-Ranges.*

SECT. 21. Outlets for gas-ranges shall have a diameter not less than that required for six burners, and all gas-ranges and heaters shall have a cock on the service-pipe. Ranges and heaters must be connected with right and left couplings, except in fireplace work where brass unions may be used.

*Pipes to be Laid above Timbers.*

SECT. 22. Pipes shall be laid above timbers unless otherwise permitted by the building commissioner.

*Second-Hand Gas Piping Not Allowed.*

SECT. 23. No second-hand gas pipe shall be put into use in any building without the written permit of the building commissioner.

*Drops or Outlets.*

SECT. 24. Drops or outlets less than  $\frac{3}{4}$  of an inch in diameter shall not be left more than  $\frac{3}{4}$  of an inch below plastering, centre-piece, or woodwork, and other outlets shall not project more than  $\frac{3}{4}$  of an inch beyond plastering or woodwork.

*Outlets, How Fastened.*

SECT. 25. Fastening boards shall not be cut away to accommodate electric wires. All outlets shall be fastened according to the following diagrams:

*Weight of Gas Pipes in Pounds per Foot.*

SECT. 26. Gas pipes, all arms and stems of fixtures shall be of the kind classed as standard pipe, and shall weigh according to the following table:

Size of Pipe.	Pounds Per Foot.
$\frac{1}{8}$ -inch pipe . . . . .	.24
$\frac{1}{4}$ -inch pipe . . . . .	.42
$\frac{3}{8}$ -inch pipe . . . . .	.56
$\frac{1}{2}$ -inch pipe . . . . .	.85
$\frac{3}{4}$ -inch pipe . . . . .	1.12
1-inch pipe . . . . .	1.67
1 $\frac{1}{4}$ -inch pipe . . . . .	2.24
1 $\frac{1}{2}$ -inch pipe . . . . .	2.68
2 -inch pipe . . . . .	3.61
2 $\frac{1}{2}$ -inch pipe . . . . .	5.74
3 -inch pipe . . . . .	7.54
3 $\frac{1}{2}$ -inch pipe . . . . .	9.00
4 -inch pipe . . . . .	10.66

*No Gas Pipe to be Laid Within Six Inches of Electric Wire.*

SECT. 27. No gas pipe shall be laid within 6 inches of an electric wire, except where the electric wire is in an insulated conduit.

*Spark or Self-Lighting Burners to be Tested with Mercury Test.*

SECT. 28. Wherever spark-lighting or self-lighting burners are used the mercury test shall be applied to the cocks.

*Gas Engines.*

SECT. 29. (a) Gas engines must be connected to service from which no gas for illuminating purposes is used.

*Exhaust Pipes.*

(b.) Exhaust pipes shall be run to roof when possible, not come in contact with woodwork, and be properly protected.

*Diaphragms and Bags.*

(c.) Diaphragms and bags must be on the same floor with engine and have a valve governing same.

*Size of Pipes Connecting Gas Engines.*

(d.) The sizes of pipes used in connecting gas engines will be as follows:

Horse Power.	Feet. Per Hour.	Burners.	Size (in inches).	Length (in feet)
1	40	10	$\frac{3}{4}$	50
2	80	20	$\frac{3}{4}$	50
3	120	30	1	70
4	160	40	$1\frac{1}{4}$	100
5	200	50	$1\frac{1}{4}$	100
6	240	60	$1\frac{1}{4}$	100



Horse Power.	Feet Per Hour.	Burners.	Size (in inches).	Length (in feet).
7	280	70	1½	150
8	320	80	1½	150
9	360	90	1½	150
10	400	100	1½	150
11	440	110	2	200
12	480	120	2	200
13	520	130	2	200
14	560	140	2	200
15	600	150	2	200
16	640	160	2	200
17	680	170	2	200
18	720	180	2	200
19	760	190	2	200
20	800	200	2	200
21	840	210	2½	300
22	880	220	2½	300
23	920	230	2½	300
24	960	240	2½	300
25	1,000	250	2½	300
26	1,040	260	2½	300
27	1,080	270	2½	300

*Gas Not to be Turned on Until Piping and Fixtures Approved.*

SECT. 30. Gas shall not be turned on in any building until the piping and fixtures have been approved by the building commissioner.

*Connections with Gas Appliances.*

SECT. 31. No connection for any gas appliance shall be made to any gas fixtures on which any part of the piping thereon shall be less than three-eighths inch.

*Rubber or Flexible Tubing not Allowed.*

SECT. 32. Any gas appliance having a controlling gas cock on the same will not be approved by the Building Department if connected with rubber or flexible tubing.

*Hose Cock and Independent Fitting.*

SECT. 33. No hose cock or independent fitting that controls the gas supply to any appliance shall be nearer than six inches to any other cock.

---

CHAPTER 550, ACTS OF 1907.

*Gas Fitting — Definition of.*

SECTION 11. Gas fitting shall mean the work of putting together any fittings, pipes, or fixtures or other appliances which are to contain gas for heat, light or power purposes and will be subject to inspection under existing laws.

---

CHAPTER 452, ACTS OF 1898.

AN ACT RELATIVE TO THE HEIGHT OF BUILDINGS ON AND NEAR COPLEY SQUARE, IN THE CITY OF BOSTON.

*Height Limit, Ninety Feet.*

*Be it enacted, etc., as follows:*

SECTION 1. Any building now being built, or hereafter to be built, rebuilt or altered in the city of Boston, upon any land abutting on St. James avenue, between Clarendon street and Dartmouth street, or upon land at the corner of Dartmouth street and Huntington avenue, now occupied by the Pierce building, so called, or upon land abutting on Dartmouth street, now occupied by the Boston Public Library building, or upon land at the corner of Dartmouth street and Boylston street, now occupied by the

new Old South Church building, may be completed, built, rebuilt or altered to the height of ninety feet, and no more; and upon any land or lands abutting on Boylston street, between Dartmouth street and Clarendon street, may be completed, built, rebuilt or altered to the height of one hundred feet and no more: *provided, however*, that there may be erected on any such building, above the limits hereinbefore prescribed, such steeples, towers, domes, sculptured ornaments and chimneys as the board of park commissioners of said city may approve.

SECT. 2. The provisions of chapter three hundred and thirteen of the acts of the year eighteen hundred and ninety-six, and of chapter three hundred and seventy-nine of the acts of the year eighteen hundred and ninety-seven, so far as they limit the height of buildings, shall not be construed to apply to the territory specified and restricted in section one of this act.

SECT. 3. The owner of or any person having an interest in any building upon any land described in section one of this act the construction whereof was begun but not completed before the fourteenth day of January in the current year, who suffers damage under the provisions of this act by reason or in consequence of having planned and begun such construction, or made contracts therefor, for a height exceeding that limited by section one of this act for the locality where such construction has been begun, may recover damages from the city of Boston for material bought or actually contracted for, and the use of which is prevented by the provisions of this act, for the excess of cost of material bought or actually contracted for over that which would be necessary for such building if, not exceeding in height the limit prescribed for that locality by section one of this act, less the value of such materials as are not required on account of the limitations resulting from the provisions of this act, and

the actual cost or expense of any rearrangement of the design or construction of such building made necessary by this act, by proceedings begun within two years of the passage of this act, and in the manner prescribed by law for obtaining payment for damages sustained by any person whose land is taken in the laying out of a highway in said city.

SECT. 4. Any person sustaining damage or loss in his property by reason of the limit of the height of buildings provided for in this act, may recover such damage or loss from the city of Boston, by proceedings begun within three years of the passage of this act, and in the manner prescribed by law for obtaining payment for damages sustained by any person whose land is taken in the laying out of a highway in said city.

SECT. 5. This act shall take effect upon its passage.

[Approved May 23, 1898.]

---

## CHAPTER 457, ACTS OF 1899.

AN ACT TO LIMIT THE HEIGHTS OF BUILDINGS IN THE VICINITY OF THE STATE HOUSE.

*Height Limit, Seventy Feet.*

*Be it enacted, etc., as follows:*

SECTION 1. Any building now being built or hereafter to be built, rebuilt or altered in that part of the city of Boston which lies within the following described territory, to wit:—Beginning at the corner of Beacon street and Hancock avenue, thence continuing westerly on Beacon street to Joy street, thence continuing northerly on Joy street to Myrtle street, thence continuing easterly on Myrtle street to Hancock street, thence continuing southerly on Hancock street and Hancock avenue to the point of beginning,—may be completed, built, rebuilt or altered to the height of seventy feet measured on its

principal front and no higher, and any part of a building on or within ninety-five feet of Beacon street, between the Claffin building, so called, and Park street, may be completed, built, rebuilt or altered to the height of seventy feet above the highest grade of said part of Beacon street, and no higher: *provided, however*, that there may be erected on any such building such chimneys, pipes, water tanks and elevator houses as the Governor and Council may approve.

[1901, c. 525, sect. 4.]

SECT. 2. If and in so far as this act, or proceedings to enforce it, may deprive any person of rights existing under the Constitution, any such person now owning land within the district above described, sustaining damages in his property by reason of the limitations of the height provided for in this act of any building on or to be placed on such land may recover from the Commonwealth such damages as determined by a jury of the superior court for the county of Suffolk, on his petition therefor filed in the office of the clerk of said court within one year after the passage of this act, such determination and payment of the damages to be made under the same rules of law, so far as applicable, as govern the determination and payment of damages for the taking of lands for highways in said city.

SECT. 3. This act shall take effect upon its passage.

[Approved June 2, 1899.]

---

## CHAPTER 543, ACTS OF 1902.

AN ACT RELATIVE TO THE IMPROVEMENT OF THE STATE HOUSE AND TO THE HEIGHT OF BUILDINGS ON BEACON STREET AND BOWDOIN STREET IN THE CITY OF BOSTON.

*Height, Limits, One Hundred Feet—Seventy Feet.*

SECTION 1. Any part of any building abutting on or within forty-two feet of Bowdoin street between Allston

street and Beacon street may be completed, built, rebuilt or altered to the height of one hundred feet above the highest grade of that part of said Bowdoin street on which the building abuts as such grade has been changed and established by the governor and council and no higher, and any part of any building on or within ninety-five feet of Beacon street between the Claffin building, so called, and Park street may be completed, built, rebuilt, or altered to the height of seventy-feet above the highest grade of said Beacon street and no higher: *provided, however,* that there may be erected on any such building, such chimneys, pipes, water tanks, elevator houses and ornamental features which shall not increase the interior capacity of said building as the governor and council may approve.

SECT. 2. Any person owning land on or within forty-two feet of Bowdoin street, between Allston street and Beacon street, or on or within ninety-five feet of Beacon street between the Claffin building, so called, and Park street, whose property is damaged more than it is benefited by the improvement of the State House, consisting of the limitation of the height of buildings on said land, the laying out and grading of said streets, the removal of buildings between Hancock street and Bowdoin street, the reconstruction and extension of the State House and the construction of the park between Bowdoin street and the State House, may, within two years after the passage of this act, and not afterward, file in the office of the clerk of the superior court for the county of Suffolk, his petition for a jury to determine such damage, and a jury of said court shall thereupon determine the question, under the rules of law, so far as they are applicable, under which damages for the laying out of highways under the

Revised Laws are determined. If the jury find that the petitioner is damaged more than he is benefited by said improvement they shall determine the amount of the difference, and the Commonwealth shall pay the same; and if the jury shall not so find, judgment shall be entered for the Commonwealth, costs taxed and execution issued therefor against the petitioner as in civil cases. The city of Boston shall repay to the Commonwealth all damages which the state shall be required to pay for the change of grade of Bowdoin street made under authority of the governor and council, and for all expenses incurred in making such change.

SECT. 3. Section two of chapter three hundred and eighty-two of the acts of the year nineteen hundred, as amended by section one of chapter five hundred and twenty-five of the acts of the year nineteen hundred and one, is hereby further amended by striking out all of said section two after the word "Commonwealth," in the seventeenth line, so as to read as follows: *Section 2.* The governor and council may lay out said land for use as a park, with driveways, walks, grass plots, curbing and railing; may close Mount Vernon street from Beacon street to the state house arch; may construct a new approach to the state house from Bowdoin street and from Beacon street; may build retaining walls and fences; may change the grade of Mount Vernon street from Joy street to the state house as they shall deem to be most advantageous for an approach to the state house; may change the grade of Bowdoin street from Beacon street to Ashburton place so that the street will be substantially level in that part, and may widen Bowdoin street at any part to a width not exceeding fifty feet; may grade and construct said streets and relay the sewers, pipes, tubes,

conduits and wires therein whenever necessary, and may provide for the proper storage of coal for the use of the Commonwealth.

SECT. 4. Section three of said chapter five hundred and twenty-five is hereby repealed.

SECT. 5. This act shall take effect upon its passage.

[Approved June 28, 1902.]

---

## CHAPTER 333, ACTS OF 1904.

### AN ACT RELATIVE TO THE HEIGHT OF BUILDINGS IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. The city of Boston shall be divided into districts of two classes, to be designated districts A and B. The boundaries of the said districts, established as hereinafter provided, shall continue for a period of fifteen years, and shall be determined in such manner that those parts of the city in which all or the greater part of the buildings situate therein are at the time of such determination used for business or commercial purposes shall be included in the district or districts designated A and those parts of the city in which all or the greater part of the buildings situate therein are at the said time used for residential purposes or for other purposes not business or commercial shall be in the district or districts designated B.

SECT. 2. Upon the passage of this act the mayor of the city shall appoint a commission of three members to be called "Commission on Height of Buildings in the City of Boston." The commission shall immediately upon its appointment give notice and public hearings, and shall make an order establishing the boundaries of the districts aforesaid, and, within one month after its appointment, shall cause the same to be recorded in the registry of deeds for the county of Suffolk. The boundaries so established



shall continue for a period of fifteen years from the date of said recording. Any person who is aggrieved by the said order may, within thirty days after the recording thereof, appeal to the commission for a revision; and the commission may, within six months after its appointment, revise such order, and the revision shall be recorded in the registry of deeds for the county of Suffolk, and shall date back to the original date of recording. The members of the commission shall serve until the districts have been established as aforesaid; and any vacancy in the commission caused by resignation, death or inability to act shall be filled by the mayor, on written application by the remaining members of the commission or of ten inhabitants of the city. The members of the commission shall receive such compensation as the mayor shall determine.

*Height Limit in District A and District B, Exceptions.*

SECT. 3. In the city of Boston no building shall be erected to a height of more than one hundred and twenty-five feet above the grade of the street in any district designated A, and no building shall be erected to a height of more than eighty feet above the grade of the street in any district designated B. These restrictions shall not apply to grain or coal elevators or sugar refineries in any district designated A, nor to steeples, domes, towers or cupolas erected for strictly ornamental purposes, of fireproof material, on buildings of the above height or less in any district. The supreme judicial court and the superior courts shall each have jurisdiction in equity to enforce the provisions of this act, and to restrain the violation thereof.

SECT. 4. This act shall take effect upon its passage.

[Approved May 13, 1904.]

ORDER OF DECEMBER 3, 1904.

June 7, 1904, the mayor of the city of Boston, under the provisions of chapter 333 of the Acts of 1904, ap-

pointed the Commission on Height of Buildings in the city of Boston, and they on July 5, 1904, made an order in accordance with the provisions of said chapter, which order is recorded in the Suffolk Registry of Deeds, Book 2976, page 45.

ORDER OF JULY 5, 1904, AS AMENDED AND REVISED BY  
ORDER OF DECEMBER 3, 1904.

*Boundaries of District A.*

A. The boundaries of the Districts A, hereby established, are as follows, to wit:

1. Beginning on the northerly side of that part of the said city known as East Boston at the Chelsea Street Bridge, thence running southeasterly, southerly and southwesterly through the centre of Chelsea street to Eagle square, thence westerly through said Eagle square and the centre of Eagle street to Glendon street, thence northerly through the centre of said Glendon street to Condor street, thence westerly through the centre of said Condor street to Border street, thence southerly and southwesterly through the centre of said Border street to Sumner street, thence southeasterly through the centre of said Sumner street to Orleans street, thence southwesterly through the centre of said Orleans street to Marginal street, thence southeasterly and easterly through the centre of said Marginal street to Jeffries street, thence northeasterly through the centre of said Jeffries street to Maverick street, thence northwesterly through the centre of said Maverick street to the location of the Boston, Revere Beach and Lynn Railroad, thence northerly and northeasterly along said railroad to the property of the said city known as Wood Island Park, thence southeasterly along the line dividing the said property of the said city from the property of the East Boston Company and the property of the Commonwealth to the harbor, thence southwesterly, westerly, northwesterly, northerly,

northeasterly, and easterly along the said harbor and Chelsea Creek, around the said East Boston to the point of beginning at said Chelsea Street Bridge; meaning to include in the said District A all those portions of wards one and two of the said city, as now established by law, which are situated within the boundary line hereinbefore described.

2. Beginning on the southerly side of that part of the said city known as Charlestown at the Charlestown Bridge, thence running northwesterly through the centre of said bridge and the approaches thereof to a point on said approaches immediately over the centre of the arch connecting Warren avenue with Water street, thence northeasterly through the centre of said Water street to the property of the United States known as the United States Navy Yard, thence northwesterly along the southwesterly boundary line of said property of the United States to Chelsea street, thence northeasterly through the centre of said Chelsea street to Medford street, thence northwesterly and westerly through the centre of said Medford street to the junction of said Medford street, Bunker Hill street and Main street, thence northwesterly through the centre of said Main street to the property of the said city known as the Charlestown Playground, thence northeasterly along the southeasterly boundary of said Playground to the Mystic river, thence easterly, southeasterly, southerly and southwesterly along said Mystic river and the harbor around said Charlestown to the point of beginning at said Charlestown Bridge; meaning to include in the said District A all those portions of Wards three, four and five of the said city as now established by law, which are situated within the boundary line hereinbefore described.

3. Beginning on the easterly side of that part of the said city known as the city proper at the Congress Street

Bridge, thence running southeasterly across said bridge to that part of said city known as South Boston, thence northeasterly, easterly, southeasterly, westerly, southerly and easterly around the northerly part of said South Boston and the Reserved channel, so-called, to the point on the southerly boundary of said Reserved channel where Q street extended northerly would meet the said channel, thence southerly through the centre of said Q street to East First street, thence westerly through the centre of East First street to I street, thence southerly through the centre of said I street to East Second street, thence westerly through the centre of said East Second street to the junction of said East Second street, Dorchester street and West First street, thence northwesterly through the centre of said West First street to Dorchester avenue, thence southerly through the centre of said Dorchester avenue to Dexter street, thence westerly through the centre of said Dexter street to Ellery street, thence southerly through the centre of said Ellery street to Southampton street, thence westerly through the centre of said Southampton street to Massachusetts avenue, thence northwesterly through the centre of said Massachusetts avenue to Albany street, thence northeasterly through the centre of said Albany street to East Dedham street, thence northwesterly through the centre of said East Dedham street to Harrison avenue, thence northeasterly through the centre of said Harrison avenue to Troy street, thence southeasterly through the centre of said Troy street to Albany street, thence northerly through the centre of said Albany street to Broadway, thence northwesterly through the centre of said Broadway to Washington street, thence northwesterly across said Washington street and through the centre of Pleasant street to Piedmont street, thence westerly through the

---

\* Q street is now named Farragut Road.

centre of said Piedmont street, to Ferdinand street,\* thence northwesterly through the centre of said Ferdinand street to Columbus avenue, thence southwesterly through the centre of Columbus avenue to a point where a line passing along the boundary line between the estates now numbered 352 and 356 on Boylston street and extended southeasterly would meet said point on Columbus avenue, thence from said point northwesterly along said line and between said estates above mentioned to a point in the centre of Boylston street opposite or nearly opposite the westerly boundary of the lot on which the Arlington Street Church now stands, thence easterly through the centre of said Boylston street to Tremont street, thence northerly and northeasterly through the centre of said Tremont street to Park street, thence northwesterly through the centre of said Park street to Beacon street, thence northeasterly through the centre of said Beacon street to Bowdoin street, thence northerly through the centre of said Bowdoin street to Cambridge street, thence westerly through the centre of said Cambridge street to Staniford street, thence northerly through the centre of said Staniford street to Green street, thence northwesterly through the centre of said Green street to Leverett street, thence northwesterly through the centre of said Leverett street to the Charles river at Craigie Bridge, thence northeasterly, easterly, southeasterly, southerly and southwesterly by the said Charles river and the said harbor around the said city proper to the point of beginning at said Congress Street Bridge; meaning to include in said District A the whole of ward six and all those portions of wards seven, eight, nine, ten, eleven, twelve, thirteen, fourteen, fifteen and seventeen of the said city, as now established by law, which are situated within the boundary line hereinbefore described.

---

\* Ferdinand street is now Arlington street.

*Boundaries of District B.*

B. The boundaries of the Districts B hereby established are as follows, to wit:

1. All those portions of said wards one and two which are situated outside the line beginning and ending at said Chelsea Street Bridge hereinbefore established as the boundary of one of said Districts A.

2. All those portions of said wards three, four and five which are situated outside the line beginning and ending at said Charlestown Bridge hereinbefore established as the boundary of one of said Districts A.

3. The whole of wards sixteen, eighteen, nineteen, twenty, twenty-one, twenty-two, twenty-three, twenty-four and twenty-five of the said city, as now established by law, and all those portions of said wards seven, eight, nine, ten, eleven, twelve, thirteen, fourteen, fifteen and seventeen which are situated outside the line beginning and ending at said Congress Street Bridge hereinbefore established as the boundary of one of said Districts A.

Meaning to include in the said Districts B all those portions of the said city not included in the Districts hereinbefore established as Districts A.

Wherever in this order the words "harbor," "river," "creek" are found, the same are intended to mean the furthest line towards deep water on said harbor, river or creek respectively on which the erection of wharves or other structures is permitted by the State and United States authorities.

---

**CHAPTER 383, STATUTE OF 1905.****AN ACT RELATIVE TO THE HEIGHT OF BUILDINGS IN THE  
CITY OF BOSTON.**

*Be it enacted, as follows:*

SECTION 1. Within thirty days after the passage of this act the mayor of the city of Boston shall appoint a com-

mission of three members to determine, in accordance with the conditions hereinafter provided, the height of buildings within the district designated by the commission on height of buildings in the city of Boston as district B, in accordance with chapter three hundred and thirty-three of the acts of the year nineteen hundred and four.

SECT. 2. Said commission shall immediately upon its appointment give notice and public hearings, and shall make an order establishing the boundaries of or otherwise pointing out such parts, if any, of said district B, as it may designate in which buildings may be erected to a height exceeding eighty feet but not exceeding one hundred feet, and the height between eighty feet and one hundred feet to which buildings may be so erected, and the conditions under which buildings may be erected to said height except that such order may provide for the erection of buildings as aforesaid to a height not exceeding one hundred and twenty-five feet in that portion of said district B which lies within fifty feet from the boundary line separating said district B from the district designated by the commission on height of buildings in the city of Boston as district A, in accordance with said chapter three hundred and thirty-three, provided said boundary line divides the premises affected by such order from other adjoining premises both owned by the same person or persons, and within sixty days after its appointment shall cause the same to be recorded in the registry of deeds for the county of Suffolk. Any person who is aggrieved by such order may, within sixty days after the recording thereof, appeal to the commission for a revision; and the commission may, previous to the first day of January in the year nineteen hundred and six, revise such order, and the revision shall be recorded in the registry of deeds for the county of Suffolk and shall date back to the original date of recording. The boundaries so established shall continue for a period of fifteen years from the date of the recording of the order

made by the commission on height of buildings in the city of Boston under chapter three hundred and thirty-three of the acts of the year nineteen hundred and four. The members of the commission shall receive such compensation as the mayor shall determine.

*Heights Limited to 125 Feet — 100 Feet — 70 Feet.*

SECT. 3. Within such parts of district B as may be designated by the commission as aforesaid (which may, except as hereinafter provided, include any parts of said district B affected by prior acts limiting the height of buildings) buildings may be erected to the height fixed by the commission as aforesaid, exceeding eighty feet but not exceeding one hundred feet, or one hundred and twenty-five feet as hereinbefore provided, and subject to such conditions as may be fixed as aforesaid by the commission; but within the following described territory, to wit:— Beginning at the corner of Beacon street and Hancock avenue, thence continuing westerly on Beacon street to Joy street, thence continuing northerly on Joy street to Myrtle street, thence continuing easterly on Myrtle street to Hancock street, thence continuing southerly on Hancock street and Hancock avenue to the point of beginning, no building shall be erected to a height greater than seventy feet, measured on its principal front, and no building shall be erected on a parkway, boulevard or public way on which a building line has been established by the board of park commissioners or by the board of street commissioners, acting under any general or special statute, to a greater height than that allowed by the order of said boards; and no building upon land any owner of which has received and retained compensation in damages for any limitation of height or who retains any claim for such damages shall be erected to a height greater than that fixed by the limitation for which such damages were received or claimed.



*Height Unlimited.*

SECT. 4. No limitations of the height of buildings, or of the roofs thereof, in the city of Boston shall apply to churches, steeples, towers, domes, cupolas, arched or vaulted roofs, belfries or statuary, nor shall such portions of buildings be occupied, nor to chimneys, gas holders, coal or grain elevators, open balustrades, skylights, ventilators, flagstuffs, railings, weather vanes, soil pipes, steam exhausts, signs, roof houses, except as otherwise prohibited by law.

*Roof Houses, Pent Houses and Bulkheads.*

Roof houses, pent houses, bulkheads and skylights above the roof line used to inclose elevator machinery or shafts may be of such dimensions as approved by the building commissioner. The area so inclosed for elevator shafts shall not be used for any purpose except the storage of tools and appliances used for the maintenance of the elevators.

Roof houses, pent houses and bulkheads in first-class buildings may be constructed of angle iron and four-inch blocks, plastered on the inside and outside, or covered inside and outside with metal covering or angle iron, and two-inch solid metal lath and plaster walls may be used, the door to be of metal frame covered with metal. For second and third class buildings, roof houses, pent houses and bulkheads may be of wood frame covered with metal on the outside and plastered on metal lathing on the inside: *provided*, that the door is covered with metal on both sides.

[1919, c. 156, Special Act, to take effect April 24, 1919.]

[1922, c. 174, sect 1, 1923, c. 462, sect. 27.]

SECT. 5. This act shall take effect upon its passage.

[*Approved May 8, 1905.*]

## ORDER OF JULY 21, 1905.

*Height Limit. — Street Exceeding Sixty-four Feet in Width.*

Buildings may be erected on streets exceeding sixty-four (64) feet in width, to a height equal to one and one

quarter times the width of the street upon which the building stands; and, if situated on more than one street, the widest street is to be taken, the height to be measured from the mean grade of the curbs of all the streets upon which the building is situated, and not exceeding one hundred (100) feet in any event.

#### *Width of Streets.*

If the street is of uneven width, its width will be considered as the average width opposite the building to be erected.

The width of a street shall be held to include the width of any space on the same side of the street upon which a building stands, upon or within which space no building can be lawfully erected by virtue of any building line established by the Board of Street Commissioners or the Board of Park Commissioners acting under general or special laws.

All street or portions of streets upon which buildings may be erected on one side only shall be considered as of a width of eighty (80) feet as to that portion upon which buildings may be erected on one side only.

In the case of irregular or triangular open spaces formed by the intersection of streets, the width of the street shall be taken as the width of the widest street entering said space at the port of entrance.

#### *Parkway Restrictions.*

No building shall, however, be erected on a parkway, boulevard or public way on which a building line has been established by either of said Boards acting under general or special laws to a height greater than that allowed by said general or special laws, nor otherwise in violation of Section 3 of said Chap. 383, Act of 1905.

*Height Limit — Eighty Feet Exceptions.*

No building shall be erected to a height greater than eighty (80) feet unless its width on each and every public street upon which it stands will be at least one half its height.

Nothing in this order shall be construed as affecting any condition or restriction imposed by deed, agreement or by operation of law on any property in said District B.

*Height Limit — One Hundred Twenty-five Feet —  
District B.*

The said Commissioner further provides that buildings may be erected to a height not exceeding one hundred and twenty-five (125) feet in that portion of the District B as established by the Commission on Height of Buildings in its order dated December 3, 1904, recorded with Suffolk Deeds, Book 3008, page 129, which lies fifty (50) feet westerly from the boundary line running from Columbus avenue to the center of Boylston street, separating said District B from District A, as established by said order; *provided, however*, that said portion of District B is owned by the same person or persons who own the adjoining premises in District A.

REVISED ORDER OF NOVEMBER 20, 1905.

*Mechanic Arts High School.*

1. So long as the property owned by the city of Boston on Dalton, Belvidere and Scotia streets, bounded 205.5 feet on Dalton street, 250 feet on Belvidere street, and 184 feet on Scotia street, be said measurements more or less, shall be used for a Mechanic Arts High School, any building or buildings thereon may be erected to a height of one hundred (100) feet.

2. Add at the end of the third paragraph the words: "or by the Commonwealth or City," so that the concluding part of said paragraph shall read, "established by the Board of Street Commissioners or the Board of Park Commissioners acting under general or special laws or by the Commonwealth or City."

3. After the tenth word in the fourth paragraph insert the word "lawfully" so that said paragraph shall read: "All streets or portion of streets upon which buildings may lawfully be erected, etc."

[1922, c. 174.]

[1923, c. 462, sect. 27.]

NOTE.— See chapter 333, Acts of 1915, Special Acts and Order following.

---

## CHAPTER 416, ACTS OF 1907.

### AN ACT RELATIVE TO THE HEIGHT OF BUILDINGS ON RUTHERFORD AVENUE IN THE CITY OF BOSTON.

#### *Height Limit One Hundred Feet.*

SECTION 1. The width of Rutherford avenue in the Charlestown district of the city of Boston, between Chapman street and the Mystic river tracks of the Boston and Maine Railroad crossing the northerly part of said avenue, shall be considered as eighty feet in respect to the height of buildings that may be erected on the southwesterly and westerly side of said avenue, between the points mentioned, so as to permit the erection of buildings to the height of one hundred feet, as provided for buildings erected on streets of the width aforesaid in district B by the commission appointed on height of buildings in the city of Boston, under chapter three hundred and eighty-three of the acts of the year nineteen hundred and five.

SECT. 2. This act shall take effect upon its passage.

[Approved May 16, 1907.]

## CHAPTER 463, ACTS OF 1907.

AN ACT RELATIVE TO THE LICENSING OF THEATRES AND  
PUBLIC HALLS IN THE CITY OF BOSTON.

SECTION 1. In Boston the mayor shall be the officer to issue licenses for theatres and public halls, and he may require such changes in the structural condition of any building before issuing a license, as in his opinion, the public safety requires, but no changes shall be ordered in excess of the statutory requirements then in force for a new building of like character. Whoever is aggrieved by any order or decision of the mayor in respect to changes that he may require in the structural condition of any building before issuing a license as aforesaid shall have the right of appeal to the board of appeals established by chapter four hundred and nineteen of the acts of the year eighteen hundred and ninety-two, or to any similar or succeeding board of appeals which may hereafter be established for the city of Boston. Said board on receipt of the appeal shall within five days thereafter examine the premises and hear the parties and render a decision in writing within ten days after such hearing, and the majority of the board shall decide whether the whole or a part of the order or requirement made by the mayor in respect to structural changes shall be complied with, or whether a license for said building shall be issued; and the mayor shall make his order or requirement in respect of structural changes and the issuing of said license conform to the decision of said board. If the mayor has granted a license as aforesaid he shall not revoke or suspend the same except by giving five days' written notice to the licensee of his intention so to do, and his reasons therefor, and if the licensee is aggrieved by said notice of revocation and said reasons he may appeal to the board of appeals,

who shall within five days from date of his appeal examine the premises and hear the parties, and render a decision in writing within three days after such hearing; and the majority of the board shall decide whether the license shall be revoked, and the mayor shall make his action conform to the decision of the board and shall not revoke the same without the approval of the board.

SECT. 2. This act shall take effect upon its passage.

[Approved May 28, 1907.]

---

## CHAPTER 284, ACTS OF 1910.

AN ACT RELATIVE TO THE CONSTRUCTION, ALTERATION, INSPECTION AND MAINTENANCE OF BUILDINGS IN THE CITY OF BOSTON.

*Building Department to Enforce Building Laws in Boston Heretofore Enforced by District Police.*

*Be it enacted, etc., as follows:*

SECTION 1. It shall be the duty of the building commissioner of the city of Boston to enforce all provisions of law relative to the construction, alteration, inspection and maintenance of buildings which are or may be applicable to said city, heretofore enforced by the district police, except the provisions of chapter four hundred and sixty-five of the acts of the year nineteen hundred and seven, relative to the inspection of steam boilers, the provisions of chapter three hundred and seventy of the acts of the year nineteen hundred and four, as amended by chapter two hundred and eighty of the acts of the year nineteen hundred and five and by chapter five hundred and two of the acts of the year nineteen hundred and eight, relative to the keeping, storage, use, manufacture, sale, handling and transportation of explosive or inflammable fluids or com-

pounds or other explosives, the provisions of chapter four hundred and thirty-three of the acts of the year nineteen hundred and four, relative to the powers and duties of the detective department of the district police in connection with the investigation or prevention of fires, and the provisions of chapter five hundred and fourteen of the acts of the year nineteen hundred and nine, and acts in amendment thereof or in addition thereto, relative to labor, so far as the provisions of said chapter are enforced by the district police.

SECT. 2. All acts and parts of acts inconsistent herewith are hereby repealed.

SECT. 3. This act shall take effect upon its passage.

[Approved March 25, 1910.]

---

## CHAPTER 571, ACTS OF 1910.

### AN ACT TO AUTHORIZE THE COLLECTION OF FEES FOR PERMITS AND LICENSES ISSUED BY DEPARTMENTS OF THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. The heads of the various departments of the city of Boston may establish, subject to the approval of the mayor, reasonable fees or charges for the issuance of permits and licenses by said departments: *provided, however,* that the charge for a permit to make excavations in any street or sidewalk shall not exceed fifty cents.

SECT. 2. The authority given in the preceding section shall not deprive any of the officials named in section twenty-eight of chapter four hundred and eighty-six of the acts of the year nineteen hundred and nine of any authority given therein to fix the charges for permits and licenses.

SECT. 3. This act shall take effect upon its passage.

[Approved May 26, 1910.]

## CHAPTER 342, ACTS OF 1911.

AN ACT TO REGULATE THE CONSTRUCTION OF GARAGES  
IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. A garage hereafter erected within the fire limits of the city of Boston shall be of first class construction. A garage *hereafter* erected in any other part of the city shall be either of first or second class construction.

SECT. 2. By the term "garage" is meant a building or that part of a building wherein are kept *five* or more automobiles or motor cars charged with or containing a volatile inflammable liquid for fuel or power. Wherever hereafter any part of an existing building is converted into a garage, the garage shall be deemed to embrace all the building not separated from the garage proper by fireproof construction satisfactory to the building commissioners, and such building or part of a building shall be of first class construction.

SECT. 3. By the term "volatile inflammable liquid" is meant any liquid that will emit inflammable vapor at a temperature below one hundred degrees Fahrenheit, when tested in the open air.

SECT. 4. The penalty for violation of this act shall be a fine of not less than ten and not more than fifty dollars a day, so long as the violation continues.

*[Approved April 27, 1911.]*

## CHAPTER 259, ACTS OF 1912.

AN ACT RELATIVE TO THE CONSTRUCTION OF GARAGES  
IN THE CITY OF BOSTON.

Existing buildings upon premises numbered 337 on Newbury street, in Boston, are exempt from the provisions



of chapter 342, Acts of 1911, but only while such buildings remain of their present size and in their present location: *provided, however*, that no part of said buildings shall be used as a dwelling.

[Approved March 18, 1912, and took effect upon its passage.]

---

### CHAPTER 280, ACTS OF 1913.

AN ACT TO AUTHORIZE THE MAYOR OF THE CITY OF BOSTON TO GRANT PERMITS FOR SPECIAL MOVING PICTURE EXHIBITIONS IN CHURCHES, HALLS OR OTHER BUILDINGS.

*Be it enacted, etc., as follows:*

SECTION 1. The mayor of the city of Boston may grant permits in writing for special exhibitions of moving pictures in churches, halls or other buildings in that city which, in his opinion, are in safe condition for said exhibitions, and he may prescribe regulations for the proper conduct of the same: *provided, however*, that such special exhibitions shall be subject to the laws of the commonwealth and the regulations of the district police relating to the use of the cinematograph or similar apparatus.

SECT. 2. A fee of two dollars shall accompany each application for a permit hereunder.

SECT. 3. This act shall take effect upon its passage.

[Approved March 12, 1913.]

[See also, chapter 82, Acts of 1927, page 382.]

---

### CHAPTER 577, ACTS OF 1913.

AN ACT TO REGULATE THE ERECTION AND MAINTENANCE OF GARAGES IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. In the city of Boston no building shall be erected for, or maintained as a garage for the storage,

keeping or care of automobiles until the issue of a permit therefor by the board of street commissioners of the city after notice and a public hearing upon an application filed with said board. The application for the permit shall be made by the owner of the parcel of land upon which such building is to be erected or maintained and shall contain the names and addresses of every owner of record of such parcel of land abutting thereon.

SECT. 2. The notice required by the preceding section shall include a copy of the application and an order of said board specifying the time and place of the public hearing, and shall be given by publication once in each week for three successive weeks in some one newspaper regularly published in said city, and by mailing by prepaid registered mail a copy to every owner of record of each parcel of land abutting on the parcel of land on which the building proposed to be erected for, or maintained as a garage is to be, or is situated, and the cost of such notice and proceedings shall be borne by the applicant.

SECT. 3. At the time and place specified in the notice for the hearing the said board shall hear all parties interested, and after giving consideration to the interests of all owners of record notified, and the general character of the neighborhood in which is situated the land or building referred to in the application, shall determine whether or not the application shall be granted and a permit issued; *provided*, that no application shall be granted and no permit issued for the erection, maintenance or use of any structure or building as a garage for more than four cars on the same street, as and within five hundred feet of any building occupied in whole or in part as a public or private school having more than fifty pupils or as a public or private hospital having more than twenty-five beds, or as a church.

SECT. 4. The provisions of this act shall not apply to a building maintained as a garage for the storage, keeping or care of automobiles at the time of the passage of this act, but any enlargement of or addition to any such building shall be subject to the provisions of this act.

SECT. 5. Whoever erects or maintains a garage in violation of this act shall be subject to a fine of not less than ten nor more than fifty dollars for every day during which such violation continues. [Approved May 2, 1913.

[1912, c. 259; 1914, c. 119, sects. 1, 2, 3.]

[1922, c. 316, sect. 1.]

NOTE.— See 1922, c. 316, sects. 2 and 3.

---

## CHAPTER 729, ACTS OF 1913.

### AN ACT RELATIVE TO DRY HOUSES IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. No building or a part of a building hereafter erected or altered in the city of Boston shall be used for kiln drying timber unless such building or part of a building is of fireproof construction approved by the building commissioner.

SECT. 2. All acts and parts of acts inconsistent herewith are hereby repealed.

SECT. 3. This act shall take effect upon its passage.

[Approved May 29, 1913.]

---

## CHAPTER 782, ACTS OF 1914.

### AN ACT TO AMEND THE BUILDING LAW OF THE CITY OF BOSTON.

#### *Elevators and Shafts.*

SECTION 6. Elevators hereafter installed shall be provided with such shaftway enclosures and doors as may be

required by the regulations of the Massachusetts board of elevator regulations. All shafts for light and ventilation and skylights over such shafts shall be constructed of like materials and in a like manner as required for elevator shafts, and all window openings in the same, except in exterior walls, shall be protected by metal frames and sash and wired glass.

SECT. 11. The provisions of this act, so far as they are the same as those of existing statutes, shall be construed as continuations thereof and not as new enactments.

SECT. 12. All acts and parts of acts inconsistent herewith are hereby repealed, but nothing herein contained shall be construed to modify the powers and duties conferred and imposed upon the board of appeals by sections six, seven and eight of chapter five hundred and fifty of the acts of the year nineteen hundred and seven.

SECT. 13. This act shall take effect ninety days after its passage.

[Approved July 7, 1914.]

---

## CHAPTER 786, ACTS OF 1914.

### AN ACT EXEMPTING A CERTAIN PARCEL OF LAND IN THE CITY OF BOSTON FROM RESTRICTIONS AS TO THE HEIGHT OF BUILDINGS.

*Be it enacted, etc., as follows:*

SECTION 1. The parcel of land situated in the city of Boston bounded by Washington street, Lovering place, Harrison avenue and Asylum street is hereby exempted from the provisions of chapter three hundred and thirty-three of the acts of the year nineteen hundred and four and chapter three hundred and eighty-three of the acts of the year nineteen hundred and five, relative to the height of buildings, and is relieved from the restrictions as to height placed thereon by the commissioners on the height of buildings in the city of Boston acting under the

authority of said statutes: *provided, however*, that nothing herein shall authorize the erection on said parcel of a building exceeding one hundred and twenty-five feet in height above the grade of the sidewalk on Washington street in front of said parcel, nor the erection of any building thereon except in accordance with a permit duly granted therefor by the building commissioner of the city of Boston.

SECT. 2. This act shall take effect upon its passage.

[*Approved July 7, 1914.*]

---

## CHAPTER 254, ACTS OF 1915 (SPECIAL ACT).

### AN ACT RELATIVE TO THE ERECTION OF BUILDINGS IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. If any building erected in the city of Boston since the first day of August in the year nineteen hundred and seven, under a permit granted by the building commissioner or issued by direction of the board of appeal, appears to have been erected contrary to the law, existing at the time of its erection, such building shall be considered as having been erected in conformity with law, and the building commissioner and the mayor shall issue the permits necessary to make lawful the use of said building for the purpose for which it was erected; *provided*, that an application for the authorization of such use be filed with the building commissioner within six months of the passage of this act; and *provided, also*, that it shall appear to said commissioner, or, upon appeal from his ruling, to a majority of the board of appeal:—

First. That said building was erected in accordance with the plans approved by the building commissioner or the board of appeal.

Second. That said building was erected in good faith with the intention of complying with the law.

Third. That the use of said building for the purpose for which it was erected would not, under all the circumstances of the case, injuriously affect public interests.

SECT. 2. The provisions of section one of this act, and any authority granted thereunder, shall not relieve the owner of any building of the duty of complying with the provisions of any law passed subsequent to the time of the erection of such building, or with the terms of any order, rule or regulation made or established under authority of such law.

SECT. 3. This act shall take effect upon its passage.

*(The foregoing was laid before the Governor on the twenty-ninth day of March, 1915, and after five days it had "the force of a law," as prescribed by the Constitution, as it was not returned by him with his objections thereto within that time.)*

*[Took effect April 3, 1925.]*

---

## CHAPTER 306, ACTS OF 1915 (SPECIAL ACT).

### AN ACT RELATIVE TO THE SHIRLEY-EUSTIS MANSION ON SHIRLEY STREET IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. The provisions of chapter five hundred and fifty of the acts of the year nineteen hundred and seven relative to the construction, alteration and maintenance of buildings in the city of Boston shall not, prior to the first day of January in the year nineteen hundred and eighteen, apply to the Shirley-Eustis mansion, so called, situated on Shirley street in the city of Boston and formerly occupied by a colonial governor and by a governor of the commonwealth: *provided*, that, in the meantime, the house shall not be used as a dwelling house or for any

other purpose except to provide for its preservation and restoration as an example of a colonial executive mansion; and *provided*, that it shall be occupied only by a caretaker and his assistants.

SECT. 2. This act shall take effect upon its passage.

[*Approved April 27, 1915.*]

---

## CHAPTER 333, ACTS OF 1915 (SPECIAL ACT).

### AN ACT RELATIVE TO THE HEIGHT OF BUILDINGS IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. The chairman of the city planning board, the fire commissioner and the building commissioner of the city of Boston are hereby created a commission to determine and revise the boundaries of districts A and B as heretofore designated by the commission on height of buildings in the city of Boston, in accordance with the provisions of chapter three hundred and thirty-three of the acts of the year nineteen hundred and four, in the orders of said commission dated, respectively, the fifth day of July and the third day of December in the year nineteen hundred and four, and recorded, respectively, with Suffolk deeds in book twenty-nine hundred and seventy-six, page forty-five, and in book three thousand and eight, page one hundred and twenty-nine.

The height to which buildings may be erected in Districts A and B, respectively, as revised and established under this act, shall not exceed the height authorized for buildings in districts designated as A and B, respectively, under the provisions of said chapter three hundred and thirty-three and of chapter three hundred and eighty-three of the acts of the year nineteen hundred and five, and the orders of the commission on height of buildings

in the city of Boston under authority of said chapter three hundred and eighty-three recorded, respectively, within Suffolk deeds in book three thousand and fifty-nine, page four hundred and seventy-seven, and in book three thousand and eighty-three, page seventy-four.

SECT. 2. The commission shall give notice and public hearings and shall make an order revising the boundaries of the districts aforesaid, and shall cause the same to be recorded in the registry of deeds for the country of Suffolk. The boundaries so established shall continue for a period of ten years from the date of said recording. Any person who is aggrieved by said order may appeal to the commission for revision within sixty days after the recording thereof; and the commission may revise the order and the revision shall be recorded in the registry of deeds for the county of Suffolk and shall date back to the original date of recording.

SECT. 3. Upon the recording of the order of revision under this act so much of section two of said chapter three hundred and thirty-three as continues the boundaries for districts A and B for a period of fifteen years from the date of the recording of the order of the commission under authority of said chapter three hundred and thirty-three shall become inoperative.

SECT. 4. This act shall take effect upon its passage.

[*Approved May 11, 1915.*]

---

COMMISSION ON HEIGHT OF BUILDINGS IN THE CITY OF  
BOSTON.

[*Order of November 2, 1916.*]\*

The undersigned having been created under the provisions of chapter three hundred and thirty-three of the special acts of the year 1915 a commission to determine



and revise the boundaries of Districts A and B as heretofore designated by the commission on height of buildings in the city of Boston, in accordance with the provisions of chapter three hundred and thirty-three of the acts of the year 1904, in the orders of said commission dated, respectively, the fifth day of July and the third day of December in the year 1904, and recorded, respectively, with Suffolk Deeds in book twenty-nine hundred and seventy-six, page forty-five, and in book three thousand and eight, page one hundred and twenty-nine, and having given notice and public hearings as provided in said act, hereby on this second day of November, 1916, make the following order establishing the boundaries of the districts in said city, designated in said acts as Districts A and B, to wit:

NOTE.— See Reg. of Deeds, Suffolk Lib. 3993, Folio 81.

A. The boundaries of District A, hereby established, are as follows, to wit:

*Boundaries of District A. East Boston.*

1. Beginning on the northerly side of that part of the city known as East Boston at the intersection of Wauwatosia street and Chelsea Creek, thence running easterly through Wauwatosia street and Boardman street to Saratoga street, thence southwesterly through Saratoga street to Addison street, thence westerly through Addison street to the Boston and Maine Railroad, thence southwesterly along the Boston and Maine Railroad and the Boston and Albany Railroad to Saratoga street, thence southwesterly through Saratoga street to Neptune road, thence northwesterly through Eagle square to Eagle street, thence westerly through Eagle street to Glendon street, thence northerly through Glendon street to Condor street, thence westerly through Condor street to Meridian

street, thence southerly through Meridian street to Gove street, thence southeasterly through Gove street to Orleans street, thence southerly through Orleans street to Marginal street, thence southeasterly through Marginal street to Jeffries street, thence northeasterly through Jeffries street to Maverick street, thence northwesterly through Maverick street to the Boston, Revere Beach and Lynn Railroad, thence northeasterly along said railroad to the centre of Porter street extended, thence northwesterly along Porter street to Bremen street, thence northerly along Bremen street to Prescott street, thence southeasterly along Prescott street to the Boston, Revere Beach and Lynn Railroad, thence northerly along said railroad to the northerly boundary of the property of the city of Boston known as Wood Island Park, thence easterly along said boundary to the harbor line, thence easterly, southerly, westerly, northerly, easterly and northeasterly along said harbor line of Boston Harbor and Chelsea Creek to the point of beginning, meaning to include in said District A all those portions of Ward one and two of said city as are now established by law which are situated within the boundary lines hereinbefore described.

*Charlestown.*

2. Beginning at the northerly side of that part of said city known as Charlestown at the Malden Bridge, thence running southerly through Alford street to Sullivan square, thence southeasterly through Sullivan square and Bunker Hill street to Medford street, thence easterly through Medford street to Chelsea street, thence southerly through Chelsea street to Henley street, thence westerly through Henley street to Harvard square, thence southwesterly through Harvard square to Harvard street, thence northwesterly across Harvard street to Washing-

ton street, thence westerly through Washington street to Rutherford avenue, thence northwesterly through Rutherford avenue to Sullivan square, thence southwestery through Cambridge street to the city line, thence southerly and easterly along the city line and the Charles river channel to the Charlestown Bridge, thence northerly, easterly, northerly, and westerly along the harbor line of Boston Harbor and the Mystic river to the point of beginning; meaning to include in said District A all those portions of wards three and four of said city as are now established by law which are situated within the boundary lines hereinbefore described.

*Boston Proper. Roxbury. Dorchester. South Boston.*

3. Beginning on the northwesterly side of that part of said city known as the City Proper, at the intersection of the city line with the Charles river dam, thence easterly and southerly along said Charles river dam and Leverett street to Green street, thence easterly along Green street to Staniford street, thence southerly along Staniford street to Cambridge street, thence easterly along Cambridge street to Bowdoin street, thence southerly along Bowdoin street to Beacon street, thence southwestery along Beacon street to Park street, thence easterly and southerly along Park and Tremont streets to Boylston street, thence westerly and southwestery along Boylston street to Massachusetts avenue, thence southeasterly along Massachusetts avenue to the Providence Division of the New York, New Haven and Hartford Railroad, thence southwestery along said railroad to Tremont street at Roxbury Crossing, thence southerly through Columbus avenue to Roxbury street, thence easterly through Roxbury street to Guild row, thence southerly through Guild row to Dudley street, thence

easterly and southeasterly through Dudley street to Columbia road, thence northeasterly through Columbia road to Dorchester avenue, thence southerly through Dorchester avenue to Park street, thence northeasterly through Park street to Adams street, thence southerly through Adams street to Neponset avenue, thence southeasterly through Neponset avenue to the Milton Branch of the New York, New Haven and Hartford Railroad, thence southwesterly along said railroad to Granite avenue, thence southeasterly along Granite avenue to the Neponset river, thence easterly and northerly along the shore of the Neponset river to the Neponset Bridge, thence northerly and westerly along the harbor lines of the Neponset river, Dorchester Bay and Old Harbor to the northwest angle of said harbor line of Old Harbor, thence northwesterly to the intersection of Old Colony Avenue and Columbia road, thence northerly along Old Colony avenue to E street, thence northeasterly along E street to Broadway, thence southeasterly along Broadway to Dorchester street, thence northeasterly through Dorchester street to East Second street, thence easterly on East Second street to I street, thence northerly through I street to East First street, thence easterly through East First street to Farragut road, thence northerly through Farragut road and Farragut road extended across the Reserved channel, thence easterly, northwesterly and southwesterly, along the harbor line of said channel and of Boston Harbor to the Northern Avenue Bridge, thence westerly along said bridge to the Harbor Line, thence northerly and westerly along the Harbor Line of Boston Harbor and the Charles river to Charlestown Bridge, thence westerly along the Charles river channel and the City Line to the point of beginning, meaning to include in said District A all of ward six and all those portions of wards five, seven, eight, nine, eleven, twelve, thirteen, seventeen, eighteen, and

twenty of the said city as are now established by law which are situated within the boundary lines hereinbefore described.

B. The boundaries of District B hereby established are as follows, to wit:

*Boundaries of District B.*

1. All those portions of said wards one and two situated outside the line beginning and ending at the intersection of Wauwatosa street and Chelsea creek hereinbefore established as the boundary of one of the said Districts A.

2. All those portions of said wards three and four situated outside the line beginning and ending at the said Malden Bridge, hereinbefore established as the boundary of one of the said Districts A.

3. The whole of wards ten, fourteen, fifteen, sixteen, nineteen, twenty-one, twenty-two, twenty-three, twenty-four, twenty-five and twenty-six and all those portions of said wards five, seven, eight, nine, eleven, twelve, thirteen, seventeen, eighteen and twenty situated outside the line beginning and ending at said intersection of the city line with the Charles river dam, hereinbefore established as the boundary of one of the said Districts A.

Meaning to include in the said Districts B all those portions of the said city not included in the districts hereinbefore established as District A.

Wherever in this order the words "harbor," "river," "creek," "shore line" or "harbor line," are found, the same are intended to mean the lines furthest towards deep water on said harbor, river or creek, respectively, on which the erection of wharves or other structures is permitted by the state and United States authorities.

Wherever the boundary line of District A is described as following a certain street, the same is intended to

include all property on that side of street which lies within the described area and also that portion of all lots on the opposite side of the street, abutting on the street, but extending to a depth of not more than one hundred and fifty feet.

Wherever the boundary line of District B is determined by the enumeration of certain streets delimiting District A, the same is intended to include all property on that side of the street within the described area, except that portion of those lots abutting on the boundary streets of District A but extending to a depth of not more than one hundred and fifty feet, which are described in the paragraph above as intended to form a part of District A.

In witness whereof, the undersigned hereto set their hands this second day of November, 1916.

RALPH A. CRAM,  
JOHN GRADY,  
PATRICK O'HEARN,

*Commission on Height of Buildings  
in the City of Boston.*

BOSTON, NOVEMBER 2, 1916.

Then personally appeared the above named Ralph A. Cram, John Grady and Patrick O'Hearn and acknowledged the foregoing instrument to be their free act and deed.

Before me,

ELISABETH M. HERLIHY,  
*Special Commissioner.*

---

ORDER ON COMMISSION ON HEIGHT OF BUILDINGS IN THE  
CITY OF BOSTON AMENDING BOUNDARIES ESTAB-  
LISHED NOVEMBER 2, 1916.

[*Order of January 12, 1917.*]\*

Whereas, The undersigned, the Commission on Height of Buildings in the City of Boston, created by chapter

333 of the Special Acts of the year 1915, a commission to determine and revise the boundaries of Districts A and B in said city, which were established in pursuance of the provisions of chapter 333 of the Acts of the year 1904, did on November 2, 1916, make an order in accordance with the provisions of said chapter 333 of the Special Acts of the year 1915, which order is recorded with Suffolk Deeds, \* Book 3993, page 81; and

*Whereas*, Certain parties are aggrieved by said order of November 2, 1916, and have in pursuance of the provisions of said chapter 333 of the Special Acts of the year 1915 duly filed petitions for the revision of said order;

*Now, therefore*, We the undersigned, having considered the matters set forth in said petitions, do hereby revise said order of November 2, 1916, in the manner following:

By excluding from District A as described in clause three of said order of November 2, 1916, and including in District B as described therein, the tract of land described as follows:

Beginning at a point on Boylston street at the division line between the Hotel Brunswick and the estate numbered 504 Boylston street; thence running southerly by said dividing line to Providence street; thence running westerly along Providence street to the dividing line between the estates now numbered 91 and 93 St. James avenue extended northerly; thence running southerly by said dividing line to St. James avenue; thence running westerly along St. James avenue crossing Dartmouth street and Huntington avenue and continuing westerly along Blagden street to the easterly line of the property of the Boston Athletic Association; thence running northerly by said last mentioned line and by said line extended parallel with Exeter street northerly to

---

\* See Reg. of Deeds, Suffolk Lib. 4006. Folio 418.

Boylston street; thence running easterly along Boylston street to the point of beginning.

The above described area shall be included wholly within District B and no part of said area shall be included in District A by reason of the following provision in said order of November 2, 1916:

“Wherever the boundary line of District A is described as following a certain street, the same is intended to include all property on that side of the street, which lies within the described area, and also that portion of all lots on the opposite side of the street, abutting on the street, but extending to a depth of not more than one hundred and fifty feet.”

“Wherever the boundary line of District B is determined by the enumeration of certain streets delimiting District A, the same is intended to include all property on that side of the street within the described area, except that portion of those lots abutting on the boundary streets of District A, but extending to a depth of not more than one hundred and fifty feet, which are described in the paragraph above as intended to form a part of District A.”

This revision shall not be construed or applied so as to prevent owners of land on the northerly side of Boylston street along the area excluded from District A as above described from erecting buildings to a height permitted under the original order of November 2, 1916.

In witness thereof, the undersigned hereto set their hands this twelfth day of January, 1917.

RALPH A. CRAM,  
JOHN GRADY,  
PATRICK O'HEARN,

*Commission on Height of Buildings  
in the City of Boston.*



BOSTON, January 12, 1917.

Then personally appeared the above named Ralph A. Cram, John Grady and Patrick O'Hearn, and acknowledged the foregoing instrument to be their free act and deed.

ELISABETH M. HERLIHY,  
*Special Commissioner.*

---

## CHAPTER 86, ACTS OF 1916 (SPECIAL ACT).

AN ACT RELATIVE TO THE USE OF PUBLIC SCHOOL PROPERTY OF THE CITY OF BOSTON FOR SOCIAL, CIVIC AND OTHER PURPOSES.

*Be it enacted, etc., as follows:*

SECTION 1. Section one of chapter one hundred and ninety-five of the acts of the year nineteen hundred and twelve, is hereby amended by striking out the words "that no admission fee is charged and," in the tenth line so as to read as follows:—*Section 1.* For the purpose of promoting the usefulness of the public school property of the city of Boston, the school committee of that city may conduct such educational and recreative activities in or upon school property under its control, and shall allow the use thereof by individuals and associations, subject to such regulations as the school committee may establish, for such educational, recreative, social, civic, philanthropic and similar purposes as the committee may deem to be for the interest of the community: *provided*, that such use shall not interfere or be inconsistent with the use of the premises for school purposes.

SECT. 2. This act shall take effect upon its passage.

[*Approved February 16, 1916.*]

## CHAPTER 115, ACTS OF 1918 (SPECIAL ACT).

AN ACT TO ALLOW METAL GARAGES OF LIMITED SIZE IN  
CERTAIN SECTIONS OF THE CITY OF BOSTON.

*Superseded by Chapter 42, Acts of 1927. (See page 380.)*

---

## CHAPTER 32, ACTS OF 1919 (SPECIAL ACT).

AN ACT TO REQUIRE THE REGISTRATION OF HOSPITALS IN  
THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. Every person, firm or corporation, using or occupying a building in the city of Boston as a hospital, shall annually in April register with the building department of the city the name of the person, firm or corporation conducting the hospital and the situation of the building, and shall state, upon forms prescribed by the building commissioner, the number of occupants, the means of egress, the system of automatic sprinklers, the lights, fire stops and other precautions against fire provided in such building.

SECT. 2. Violation of this act shall be punished by a fine not exceeding five hundred dollars.

*[Approved February 19, 1919.]*

## CHAPTER 163, ACTS OF 1919 (SPECIAL ACT).

AN ACT RELATIVE TO THE CONSTRUCTION, ALTERATION  
AND MAINTENANCE OF HOSPITALS IN THE CITY OF  
BOSTON.

*Be it enacted, etc., as follows:*

*First Class.*

SECTION 1. Every building in the city of Boston exceeding three stories or forty feet in height hereafter erected, altered or designed for use or occupation as a hospital shall be a first class building as defined in chapter five hundred and fifty of the acts of nineteen hundred and seven and the amendments thereof. Every such building shall be provided with at least two enclosed stairways, shall have an additional enclosed stairway if the number of occupants, at any time, equals seventy-five, and a further additional enclosed stairway for every additional one hundred occupants which it may at any time contain.

*Second or Third Class.*

Every building in the city of Boston three stories or less in height, or less than forty feet in height, hereafter erected, altered or designed for use or occupation as a hospital may be of second or third class construction, shall have means of egress satisfactory to the building commissioner, and no story or part of a story above the second shall be used for the care, treatment or lodging of patients.

*Shafts, to be Sprinklered.*

SECT. 2. The elevator, light and ventilating shafts and basements in all hospital buildings specified in section one,

shall be provided with a system of automatic sprinklers approved as to location, arrangement and efficiency by the building commissioner.

*Halls and Stairs to be Kept Lighted.*

SECT. 3. The halls and stairs in all hospital buildings specified in section one, shall be provided with proper and sufficient lights which shall be kept lighted during the night.

*Shafts to be Enclosed in Basement.*

SECT. 4. The elevator, light and ventilating shafts in all hospital buildings specified in section one, shall be enclosed in the basement with masonry walls not less than eight inches thick or with two-inch metal and plaster partitions.

SECT. 5. In case of an existing or impending epidemic of a disease, the building commissioner, upon the recommendation of the health commissioner and with the written approval of the mayor, may temporarily suspend the provisions of this act.

SECT. 6. The health commissioner and the building commissioner, acting jointly, are hereby authorized to promulgate, from time to time, such regulations as in their judgment, public interests require, to govern the establishment and maintenance of hospitals whether for human beings or for domestic animals, and to regulate the issue, suspension and revocation of licenses for the same.

*Registration Required.*

SECT. 7. Every person, firm or corporation hereafter using or occupying a building in the city of Boston as a hospital shall forthwith register with the building department in the manner required by chapter thirty-two of the Special Acts of nineteen hundred and nineteen, setting forth all the facts and data therein specified.

SECT. 8. Violation of this act shall be punished by a fine not exceeding five hundred dollars.

[Approved April 30, 1919.]

---

### CHAPTER 298, ACTS OF 1920.

#### AN ACT RELATIVE TO THE OPERATION OF ELEVATORS BY MINORS.

*Be it enacted, etc., as follows:*

SECTION 1. No minor under sixteen years of age shall be employed or permitted to operate, clean or repair a freight elevator.

SECT. 2. Violations of the provisions of this act shall be punished by a fine of not more than one hundred dollars.

[Approved April 9, 1920.]

---

### CHAPTER 455, ACTS OF 1920.

#### AN ACT RELATIVE TO THE LIMITATION IN HEIGHT OF BUILDINGS ON LAND BETWEEN DARTMOUTH STREET AND TRINITY PLACE IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. The limitation of the height of buildings contained in chapter four hundred and fifty-two of the acts of eighteen hundred and ninety-eight shall not apply to a parcel of land now owned by the trustees of the Copley Square Trust, containing about twenty-one thousand, two hundred and forty square feet, and bounded southerly on Stuart street two hundred and thirty-six feet, westerly on Dartmouth street ninety feet, northerly on other land of said trustees on which now stands the Copley Plaza Hotel two hundred and thirty-six feet, and easterly on Trinity place ninety feet. If, within two years from the passage of this act, said parcel of land or any part or parts thereof are taken by public authority for any public use, the owner or owners of the land so taken shall, with respect to the land taken and apart from improvements thereon, only be

entitled to recover damages to the extent that they would have been entitled to recover if this act had not been passed.

SECT. 2. This act shall take effect upon its passage.

[Approved May 14, 1920.]

---

#### CHAPTER 645, ACTS OF 1920.

##### AN ACT RELATIVE TO AUTOMATIC SPRINKLERS IN TENEMENT HOUSES IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. The provisions of the fourth, fifth and sixth paragraphs of section forty-five of chapter five hundred and fifty of the acts of nineteen hundred and seven, as amended by section ten of chapter seven hundred and eighty-two of the acts of nineteen hundred and fourteen, and by section four of chapter three hundred and fifty-two of the Special Acts of nineteen hundred and fifteen, and by section one of chapter four hundred and forty of the acts of nineteen hundred and twenty, are hereby suspended and rendered inoperative as to tenement houses now existing until the first day of March in the year nineteen hundred and twenty-one.

SECT. 2. This act shall take effect upon its acceptance by the mayor of the City of Boston; but for the purposes of such acceptance it shall take effect upon its passage.

[Approved December 22, 1920.]

---

#### CHAPTER 109, ACTS OF 1921.

##### AN ACT EXEMPTING CERTAIN BUILDINGS IN THE CITY OF BOSTON FROM THE LAWS RELATIVE TO FIRE PROTECTION IN STABLES FOR HORSES AND MULES.

*Be it enacted, etc., as follows:*

The existing buildings upon premises numbered forty-nine on North Margin street, in Boston, shall be exempt

from the provisions of section eighty-six of chapter two hundred and seventy-two of the General Laws; provided that such buildings continue to be equipped with a line of fire hose on each floor above the first, to be used for fire purposes only, sufficient to reach all parts of said floor and connected with a fire supply pipe on each such floor, and provided that at least one man shall be on duty at such buildings at all times during the day and night.

[Approved March 12, 1921.]

---

### CHAPTER 137, ACTS OF 1921.

#### AN ACT TO ESTABLISH HARBOR LINES IN SOUTH BAY IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

##### *Harbor Lines.*

SECT. 1. The harbor lines in South bay in the city of Boston are hereby changed and established as follows: Beginning at a point A on the southerly side of Dover street bridge, which point is distance one hundred and eighty-three feet southeasterly from the southeasterly side line of Albany street; thence running southwestly, parallel with said side line, nine hundred feet, to point B; thence running southwestly, a little more westerly, about five hundred and fifty-five feet to a point C which is distant three hundred and seventy feet southeasterly from the northwesterly side line of Albany street, measuring at right angles to said side line from a point therein six hundred and twenty-seven feet northeasterly from the northeasterly side line of Wareham street; thence running southwestly still more westerly, about sixteen hundred and fifteen feet, to a point D which is distant three hundred and fifty-three feet southeasterly from said northwesterly side line of Albany street, measuring at right angles to said side line from the point of its intersection with the south-

westerly side line of East Brookline street; thence running southwesterly, still more westerly, five hundred feet to a point E which is distant three hundred and forty feet southeasterly from said northwesterly side line of Albany street, measuring at right angles thereto; thence running southeasterly one hundred feet at right angles to the harbor line last described to a point F; thence running northeasterly, about four hundred and thirty-five feet, to a point G which is distant four hundred and fifty-five feet southeasterly from said northwesterly side line of Albany street, measuring at right angles to said side line from point therein sixty-five feet southwesterly from the southwesterly side line of East Brookline street; thence running southeasterly, parallel with the northerly side line of Southampton street, six hundred and eighty feet to a point H; thence deflecting to the left one hundred degrees, six minutes and running northwesterly about seven hundred and five feet to a point J which is distant two hundred and ten feet southeasterly from line C-D, measuring at right angles thereto; thence running northeasterly parallel to said line C-D, eight hundred and twenty-nine feet to a point K; thence running northeasterly more northerly parallel to and two hundred and ten feet distant southeasterly from the line B-C about one thousand and ten feet to point L which is situated at the intersection of said line K-L, and a line perpendicular to the southerly side line of Dover street bridge and forty feet northwesterly from the center of pier number four of said Dover street bridge, said line also being about eighty-five feet southeasterly from the southeasterly side of the draw opening in said bridge; thence northeasterly more northerly in said line forty feet northwesterly of said pier number four about nine hundred and twenty-seven feet to its intersection with the harbor line on the easterly side



of Fort Point channel and northerly of Dover street bridge established by chapter thirty-five of the acts of eighteen hundred and forty.

*No Wharf or Structure to be Built or Extended Beyond Harbor Lines.*

SECT. 2. No wharf, pier, wall, filling or other structure of work, shall hereafter be built or extended in said South Bay beyond the harbor lines aforesaid; nor shall any structure be built or filling done inside said harbor lines and below the present high water mark in said bay, without authority or license therefor first duly obtained under and subject to the provisions of chapter ninety-one of the General Laws.

*No Work Allowed Below High Water Mark.*

SECT. 3. No structure shall be built or filling or other work done in any portion of said South Bay below the present high water mark thereof, whereby the existing flow or drainage of surface or other waters in or into and through said bay towards the sea is cut off or obstructed without first making such other provision for such flow or drainage as shall be approved by the department of public works of both the commonwealth and the city of Boston.

SECT. 4. All harbor lines, heretofore established in South Bay, so far as they differ from those established by this act, are hereby annulled.

[Approved March 23, 1921.]

---

CHAPTER 316, ACTS OF 1922.

AN ACT RELATIVE TO GARAGES IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 2. The provisions of this act shall not apply to a building maintained as a garage for the storage,

keeping or care of automobiles at the time of the passage of this act, but any enlargement or alteration of, or addition to, any such building shall be subject to the provisions of this act.

SECTION 3. This act shall take effect upon its acceptance by vote of the city council of the city of Boston, subject to the provisions of its charter; provided, that such acceptance occurs prior to December thirty-first in the current year. [*Approved April 18, 1922.*]

Accepted and approved by Mayor, May 17, 1922.

NOTE.—Sect. 1 of this act amends section three of chapter five hundred and seventy-seven of the acts of nineteen hundred and thirteen as amended.

See chapter 577 of 1913.

---

## CHAPTER 27, ACTS OF 1923.

AN ACT EXEMPTING A CERTAIN PARCEL OF LAND OF THE MASSACHUSETTS GENERAL HOSPITAL IN THE CITY OF BOSTON FROM RESTRICTIONS AS TO THE HEIGHT OF BUILDINGS.

*Be it enacted, etc., as follows:*

SECTION 1. The parcel of land of the Massachusetts General Hospital, situated in the city of Boston and bounded by Charles street, Allen street, a line three hundred and fifty feet easterly from the easterly side line of and parallel to said Charles street, Fruit street and land of the Massachusetts Charitable Eye and Ear Infirmary, is hereby exempted from the provisions of chapter three hundred and thirty-three of the acts of nineteen hundred and four, chapter three hundred and eighty-three of the acts of nineteen hundred and five and chapter three hundred and thirty-three of the Special Acts of nineteen hundred and fifteen relative to the height of buildings, and is relieved from the re-

restrictions as to height placed thereon by the commission on height of buildings in the city of Boston acting under authority of said statutes; provided, however, that nothing herein shall authorize the erection on said parcel of a building exceeding one hundred and twenty-five feet in height, nor the erection of any building thereon except in accordance with a permit duly granted therefor by the building commissioner of the city of Boston, nor shall this act operate to change existing restrictions as to the height of buildings on said parcel unless such buildings shall be erected for hospital purposes.

SECTION 2. This act shall take effect upon its passage.

[*Approved February 20, 1923.*]

---

## CHAPTER 278, ACTS OF 1923.

### AN ACT REQUIRING THE INSTALLATION OF STANDPIPES AND OTHER EQUIPMENT IN CERTAIN BUILDINGS IN THE CITY OF BOSTON.

#### DEFINITIONS.

*Be it enacted, etc., as follows:*

SECTION 1. In this act the following terms shall have the following meanings:

"Fire department connection," connection near the base of a building located not less than ten nor more than forty-two inches above the sidewalk or ground, to which the fire department hose may be attached.

"Fire department standard," the standard prescribed by the fire commissioner of the city of Boston.

"Fire department standpipe," a standpipe of not less than five inches internal diameter for buildings not exceeding ninety feet in height, and not less than six inches internal diameter for buildings of greater height.

"First aid standpipe," a standpipe of not less than two and one half inches internal diameter.

INSTALLATION OF STANDPIPES AND OTHER EQUIPMENT  
IN CERTAIN BUILDINGS IN CITY OF BOSTON.

SECTION 2. All buildings hereafter erected in the city of Boston exceeding seventy feet in height and all existing buildings in said city hereafter so altered that the height thereof is increased to over seventy feet shall be provided with such fire department standpipes, first aid standpipes, fire department connections and other fire protection equipment as is hereinafter provided. Each story of such a building shall be provided with not less than one two and one half inch outlet fitted with a two and one half inch gate valve with male end, all fire department standard, located not higher than five feet three inches above the floor; except that unless required by the building commissioner of said city of Boston no two and one half inch outlet need be installed on the ground floor. There shall further be provided on each floor not less than one one and one quarter inch outlet fitted with a one and one quarter inch gate valve, fifty feet of standard one and one quarter inch hose with nozzle with one half inch orifice attached ready for use, and a standard hose rack or reel. Such valve shall be erected not higher than five feet above the floor. Whenever required by said fire commissioner a roof hydrant or monitor nozzle shall be installed, in which event the standpipe upon said roof shall be not less than six inches internal diameter. Said roof hydrant shall consist of two two and one half inch outlets fitted with two and one half inch gate valves with male end, all fire department standard, and not less than fifty feet of standard two and one half inch hose and play pipe properly stored and accessible for use.

FIRE DEPARTMENT STANDPIPES, LOCATION, NUMBER, ETC.

Fire department standpipes shall be located so as to afford protection against exterior hazard, as well as

protection to the building in which they are placed, and where practicable shall be erected within stair enclosures. The number of fire department standpipes in each building shall be such that all portions of each story of the building may be reached by an effective stream from a standard nozzle installed and attached to hose not exceeding one hundred feet in length, and shall be primarily for the use of the fire department.

#### FIRST AID STANDPIPES, NUMBER, ETC.

First aid standpipes shall be of such number that all portions of each story of the building may be reached effectively by a stream from a standard nozzle installed and attached to hose not exceeding fifty feet in length. When in the judgment of the said building commissioner the foregoing requirements as to first aid standpipes are impracticable, separate first aid outlets at each story may be taken from fire department standpipes and the requirements for first aid standpipes may be so modified by said commissioner. First aid standpipes shall be primarily for use by the occupants of the building. Each standpipe system shall connect with the city water main through one four-inch branch provided exclusively for that purpose. Supplies shall be taken from high service when such is available. A flow test pipe of not less than two inches internal diameter shall be provided on each system. Every building subject to this act shall be provided with suitable fire department connections. When a system is composed of more than one standpipe, cross-connections shall be made so that supply through fire department connections will reach all portions of the system; except that when standpipes are widely separated, precluding the probability of mistake by the fire department, the system may be divided.

## STANDPIPES TO BE SUBJECTED TO HYDROSTATIC TEST, ETC.

All standpipes installed under the provisions of this act shall be subjected to a hydrostatic test of two hundred and fifty pounds and shall be satisfactory to the said building commissioner.

## HOSE TO BE TESTED, ETC.

All hose shall be tested in the presence of an inspector from the building department at least once a year, and all defective hose shall be replaced without delay.

## SHUTTING OFF WATER FROM STANDPIPES DURING CERTAIN MONTHS, ETC.

## PROVISO.

When in the judgment of the said fire commissioner it is impracticable to protect standpipes from freezing he may at his discretion allow water to be shut off from said standpipes from the first day of November in any year until the first day of April next following; provided, however, that a controlling valve is located, arranged, and supervised in a manner satisfactory to said commissioner.

## TO BE SUBMITTED TO CITY COUNCIL, ETC.

## PROVISO.

SECTION 3. This act shall take effect upon its acceptance by vote of the city council of the city of Boston subject to the provisions of its charter; provided that such acceptance occurs prior to December thirty-first in the current year.

*[Approved April 14, 1923.]*

*[Accepted by City Council and Approved by Mayor, September 18, 1923.]*

## CHAPTER 332, ACTS OF 1924.

AN ACT PROVIDING FOR THE APPOINTMENT OF SPECIAL NIGHT ELEVATOR INSPECTORS AND THE INSPECTION OF PASSENGER ELEVATORS AT NIGHT IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. Subject to the laws, rules and regulations governing the civil service, the building commissioner of the city of Boston may appoint not more than two special night elevator inspectors to inspect passenger elevators at night; provided, that no person shall simultaneously hold the position of day elevator inspector and special night elevator inspector. The pay of such special night elevator inspectors shall be at the rate of ten dollars for each night's inspection, but shall not exceed one thousand dollars per annum, and their duties shall be prescribed by said building commissioner.

SECT. 2. Upon request to the building commissioner by the owner or occupant of any building in the city of Boston in which a passenger elevator inspection is to be made that such inspection be made at night and upon payment to the said commissioner of the sum of ten dollars, the commissioner shall cause the same to be so made. All money collected for passenger elevator inspections made at night hereunder shall be turned over by the building commissioner to the city collector of the city of Boston.

*[Approved May 6, 1924.]*

## CHAPTER 488, ACTS OF 1924.

AN ACT REGULATING AND RESTRICTING THE USE OF BUILDINGS, AND PREMISES, THE HEIGHT AND BULK OF BUILDINGS AND THE OCCUPANCY OF LOTS IN THE CITY OF BOSTON AND FOR SAID PURPOSES DIVIDING THE CITY INTO DISTRICTS.

*Be it enacted, etc., as follows:*

## DEFINITIONS.

SECTION 1. For the purposes of this act, certain words and terms used herein are hereinafter defined; words not defined herein shall be construed as defined or used in chapter five hundred and fifty of the acts of nineteen hundred and seven, and acts in amendment thereof and in addition thereto, being the building law of the city of Boston, hereinafter referred to as the aforesaid building law or, if not defined or used therein, as in the regulations of the department of public safety.

*Building, Area of:* The maximum horizontal projected area of a building, including covered porches but excluding cornices not more than eighteen inches wide, steps and terraces.

*Dwelling:* Any house or building, or portion thereof, except a hotel, which is occupied in whole or in part as the home or residence of one or more persons, either permanently or transiently.

*Hotel:* A building occupied as the more or less temporary abiding place of individuals in which provision is not made for cooking in any apartment, and in which there are more than fifty sleeping rooms, a public dining room for the accommodation of at least fifty guests, and a general kitchen.

*Lot:* Land occupied or to be occupied by a building and its accessory buildings, and including the open spaces required under this act. Two or more buildings other



than accessory buildings upon a single parcel of land shall be deemed to occupy separate lots.

[Chap. 219 of 1925.]

*Set-back:* The minimum horizontal distance between the street line and the front line of the building, excluding steps, uncovered porches and covered but unenclosed entrance porches on the first story which do not exceed a total area of fifty square feet.

*Story, Half:* A story which is situated in a sloping roof, the area of which at a height four feet above the floor does not exceed two thirds of the floor area of the story immediately below it and which does not contain an independent apartment. A half story shall not be counted as a story for the purpose of determining yard dimensions.

*Yard, Rear:* A space on the same lot with a building, between the extreme rear line of said building and the rear line of the lot and open and unoccupied except by an unenclosed porch not exceeding sixty square feet in area.

Where said lines are not parallel the mean depth of the rear yard shall be considered its minimum depth, provided that at no point shall its depth thereby be reduced to less than twelve feet.

[Chap. 219, Acts of 1927.]

*Yard, Side:* An open, unoccupied space on the same lot with a building extending for the full length of the building between the building and the side line of the lot.

#### ESTABLISHMENT OF USE DISTRICTS.

SECTION 2. In order to regulate and restrict the location of trades, industries and other uses, and the location of buildings designed, erected, altered or occupied for specified uses, the city of Boston is hereby divided into the following classes of use districts:

- Single Residence districts,
- General Residence districts,
- Local Business districts,
- General Business districts,

Industrial districts,  
Unrestricted districts,

as appearing on the zoning map prepared by the Boston city planning board, dated March fifteenth, nineteen hundred and twenty-four and filed, April twenty-eighth of said year, in the office of the state secretary, as amended by the substitution of a new sheet ten of said plan, filed with said office May eleventh, nineteen hundred and twenty-four, in place of sheet ten previously filed.

Except as hereinafter provided no building shall be erected or altered nor shall any building or premises be used for any purpose other than a use permitted in the use district in which such building or premises is located.

#### SINGLE RESIDENCE DISTRICTS.

SECTION 3. In a single residence district no building or premises shall be erected, altered or used except for one or more of the following uses:

- (1) Single-family detached dwellings;
- (2) Clubs, except clubs the chief activity of which is a service customarily carried on as a business and clubs with more than five sleeping rooms;
- (3) Educational, religious, philanthropic or other institutional uses, provided that in the case of a hospital, sanitarium, correctional institution or similar use the health commissioner of Boston and building commissioner of Boston approve the location as not detrimental or injurious to the residential character of the neighborhood after public notice and hearing;
- (4) Farms, gardens, nurseries or greenhouses;
- (5) Municipal recreational uses;
- (6) Railroad or street railway local passenger stations;
- (7) Cemeteries, provided the health commissioner of Boston and the Boston city council approve the location;

(8) Accessory uses customarily incident to any of the above permitted uses. The term "accessory use" shall not include:

(a) A garage;

(b) Any use, except signs, located upon that half of the lot nearest the street line or lines, or within ten feet of such part of an adjacent lot, unless it is either fifty feet from the nearest street or in the same building to which the use is accessory;

(c) Signs except those pertaining to the lease, sale or use of the lot or building on which placed, and not exceeding a total area of eight square feet, and except further that on a lot occupied by a dwelling there shall not be more than one such sign, pertaining to the use thereof or bearing the name or occupation of an occupant, for each family housed and no such sign shall exceed one square foot in area;

(9) Garages in which the business of repairing is not conducted and in which not more than one commercial automobile is stored, provided after public hearing the board of street commissioners grants a license therefor. No such license shall be granted where such garage will be detrimental to the residential character of the neighborhood, or increases the fire hazard or tends to cause congestion in any private way used in common with others. From any decision of said commissioners granting any such license any person aggrieved may take an appeal, within fifteen days of notice of such decision, to the state fire marshal, who may after public hearing suspend or revoke any such license.

#### GENERAL RESIDENCE DISTRICTS.

SECTION 4. In a general residence district no building or premises shall be erected, altered or used except for one or more of the following uses:

- (1) Any use permitted in a single residence district;
- (2) Dwellings;

(3) Clubs, social or recreational buildings, except clubs the chief activity of which is a service customarily carried on as a business;

(4) Hotels, provided they conform to all the requirements of this act for dwellings;

(5) Accessory uses customarily incident to any of the above uses. The term "accessory use" shall be construed as in section three.

(6) Telephone exchange offices.

In a general residence district the building commissioner may grant a permit for physicians' offices, provided the building or use is not detrimental or injurious to the residential character of the neighborhood.

#### LOCAL BUSINESS DISTRICTS.

SECTION 5. In a local business district no building or premises shall be erected, altered or used for any use prohibited in a general business district as provided in section six, for any use injurious, noxious or offensive to a neighborhood by reason of the emission of odor, fumes, dust, smoke, vibration or noise, or for any use except one or more of the following:

(1) Any use permitted in a single or general residence district;

(2) Hotels;

(3) Fire stations;

(4) Offices or banks;

(5) Places of amusement or assembly;

(6) Stables, provided the health commissioner after public notice and hearing approves the location;

(7) Any other retail business or service not involving any manufacture on the premises except as permitted in paragraph eight of this section;

(8) Any manufacturing, industrial or other use on the same premises with and clearly incidental to one of the

above uses, provided that it does not occupy an area exceeding fifty per cent of the floor area of that part of a building occupied by such use, and provided further that the major portion of any products manufactured are to be sold at retail on the premises to the consumer;

(9) Filling stations or garages otherwise excluded, provided that the board of street commissioners, after public notice and hearing, grants a license therefor. No such license shall be granted where such filling station or garage will be detrimental or injurious to the business character of the neighborhood.

#### GENERAL BUSINESS DISTRICTS.

SECTION 6. In a general business district no building or premises shall be erected, altered or used for any of the following specified trades, industries or uses:

- (1) Aluminum, copper, iron, steel or alloys thereof: foundry or works;
- (2) Assaying, other than gold and silver;
- (3) Blacksmith or horse-shoeing shop;
- (4) Bleaching, dry cleaning or dyeing at wholesale;
- (5) Bottling works;
- (6) Brewing or distilling of liquor or spirits;
- (7) Brick, terra cotta or tile manufacture;
- (8) Building material storage yard;
- (9) Carpet or bag cleaning;
- (10) Coal, coke or wood yard;
- (11) Contractor's plant or storage yard, except during building construction on the same or an adjacent lot;
- (12) Cotton or woolen mills;
- (13) Fish curing or smoking;
- (14) Flour or grain mill or elevator;
- (15) Forge works;
- (16) Glass manufacture;

- (17) Ice manufacture for sale, or storage of more than twenty tons;
- (18) Junk or scrap iron dump, storage or wrecking;
- (19) Lumber yard;
- (20) Oiled or rubber cloth manufacture;
- (21) Paper or pulp manufacture;
- (22) Petroleum or other inflammable liquid: storage in excess of two thousand gallons or manufacture of any of its by-products;
- (23) Planing or saw mill;
- (24) Public utility power generating plant;
- (25) Rags or scrap paper dump, storage, sorting or baling;
- (26) Rock or stone crusher, mill or quarry;
- (27) Rubber manufacture or treatment;
- (28) Shoddy manufacture;
- (29) Soap manufacture;
- (30) Steam railroad yard or roundhouse;
- (31) Stone yard or cutting;
- (32) Sugar refining;
- (33) Tobacco, manufacture of chewing tobacco;
- (34) Any use prohibited in an industrial district as provided in section seven;
- (35) Any other trade, industry or use that is injurious, noxious or offensive to a neighborhood by reason of the emission of odor, fumes, dust, smoke, vibration or noise.

#### INDUSTRIAL DISTRICTS.

SECTION 7. In an industrial district no building or premises shall be erected, altered or used for any of the following specified trades, industries or uses;

- (1) Ammonia, bleaching powder or chlorine manufacture or refining;
- (2) Asphalt manufacture or refining;
- (3) Blacking or polish manufacture;

- (4) Blast furnace;
- (5) Boiler works;
- (6) Candle or sperm oil manufacture;
- (7) Cement, gypsum, lime or plaster of paris manufacture;
- (8) Coke manufacture;
- (9) Cremation, unless in a cemetery;
- (10) Creosote manufacture or treatment;
- (11) Dextrin, glucose or starch manufacture;
- (12) Disinfectant or insecticide manufacture;
- (13) Distillation of bones, coal or wood or manufacture of any of their by-products;
- (14) Dye manufacture;
- (15) Explosives or fireworks manufacture, or storage in excess of five hundred pounds;
- (16) Fat, grease, lard or tallow manufacture, refining or rendering;
- (17) Fertilizer manufacture;
- (18) Gas (fuel or illuminating) manufacture in excess of one thousand cubic feet per day or storage in excess of ten thousand cubic feet;
- (19) Gelatin, glue or size manufacture;
- (20) Hydrochloric, nitric, picric, sulphuric or sulphurous acid manufacture;
- (21) Hair manufacture;
- (22) Hot rolling mill;
- (23) Incineration or reduction of dead animals, garbage offal or refuse unless accumulated and consumed on the same premises without the emission of odor;
- (24) Lamp-black manufacture;
- (25) Linoleum or oilcloth manufacture;
- (26) Match manufacture;
- (27) Metal or ore reduction or smelting;
- (28) Oil, paint, shellac, turpentine or varnish manufacture;

(29) Petroleum or other inflammable liquids: production or refining;

(30) Printing ink manufacture;

(31) Pyroxylin manufacture, manufacture of articles thereof, or storage in excess of five hundred pounds unless in a vault approved by the state department of public safety;

(32) Rubber manufacture from crude material;

(33) Salt, soda or soda compounds manufacture;

(34) Slaughtering except as permitted by the health commissioner of Boston;

(35) Stock-yards;

(36) Tanning, curing or storage of raw hides or skins;

(37) Tar distillation or manufacture;

(38) Tar roofing or waterproofing manufacture;

(39) Wool pulling or scouring;

(40) Any other trade, industry or use that is injurious, noxious or offensive to a neighborhood by reason of the emission of odor, fumes, dust, smoke, vibration or noise, but not including places of amusement.

#### UNRESTRICTED DISTRICTS.

SECTION 8. In an unrestricted district buildings and premises may be used for any purposes not prohibited by law, ordinance or regulation.

#### NON-CONFORMING USES.

SECTION 9. Any lawful use of a building or premises or part thereof existing at the time of the taking effect of this act may be continued, although such use does not conform with the foregoing provisions hereof. In the case of a building or part thereof designed and intended for a non-conforming use, such use in a part thereof may be extended throughout the building or part thereof so designed and intended or changed to any use permitted in a district where such non-conforming use would be



permitted and not more detrimental or injurious to the neighborhood, provided no structural alterations are hereafter made therein, except those required by law, ordinance or regulation.

The building commissioner may grant a permit for the erection of additional buildings or for the enlargement or alteration of existing buildings on the same or an adjacent parcel of land, each in the same single or joint ownership of record at the time it is placed in a use district, for a trade, business, industry or other use prohibited in such district where such enlargement or alteration will not be detrimental or injurious to the character of the neighborhood.

The building commissioner may grant a permit for a non-conforming temporary building or use incidental to the development of a neighborhood and where reasonably required for such development, such permit to be issued for an initial period of not more than two years, and in the case of a building only upon application accompanied by a bond and bill of sale to the city, effective in case the building is not removed prior to the expiration of the permit. Permits may be renewed by the commissioner for successive periods of not more than two years each.

In a general business or industrial district the building commissioner may grant a permit for a building or use otherwise excluded from such district, provided such building or use is distinctly incidental and essential to a use of a building or plant with a series of buildings permitted in such a district, provided not more than twenty per cent of the total floor area of the building or buildings is to be so occupied, provided that not more than twenty per cent of the employees of the building or plant are to be engaged therein, and provided that no buildings or use otherwise prohibited in the district is located within fifty feet of any street or lot line unless such line adjoins or faces property in a district in which such use is permitted.

## ESTABLISHMENT OF BULK DISTRICTS.

SECTION 10. In order to regulate and limit the height and bulk of buildings, the area of yards and other open spaces and the percentage of lot occupancy, the city of Boston is hereby divided into the following classes of bulk districts:

Thirty-five foot districts,

Forty-foot districts,

Sixty-five foot districts,

Eighty foot districts,

One hundred and fifty-five foot districts,

as appearing on the zoning map prepared by the Boston city planning board, dated March fifteenth, nineteen hundred and twenty-four and filed, April twenty-eighth of said year, in the office of the state secretary, as amended by the substitution of a new sheet ten of said plan, filed with said office May eleventh, nineteenth hundred and twenty-four, in place of sheet ten previously filed.

Except as hereinafter provided no building or part thereof shall be erected or altered so as to produce greater heights, smaller yards or less unoccupied area than herein required for such a building for the bulk district in which it is located.

No lot shall be so reduced that the yards, courts or other open spaces shall be smaller than prescribed by this act. No yard, court or other open space shall at any time be counted as required open space for more than one building.

## THIRTY-FIVE FOOT DISTRICTS.

SECTION 11. In a thirty-five foot district:—

*Height and Occupancy:* No building shall exceed thirty-five feet or two and one half stories in height or accommodate or make provision for more than two families.

*Rear Yards:* There shall be behind every building other than an accessory building a rear yard extending across

the entire width of the lot and having a minimum depth of twenty-five feet, provided that on lots not within a single or general residence district the depth may be reduced five feet.

*Side Yards:* There shall be a side yard on each side of every building or pair of semi-detached buildings in a single or general residence district. The minimum width of any side yard provided in a thirty-five foot district shall be six feet, which shall be increased six inches for every twenty feet or fraction thereof that the length of the side yard exceeds sixty feet, provided that on no lot held under a separate and distinct ownership from adjacent lots and of record at the time it is placed in a thirty-five foot district shall the buildable width be reduced by this requirement to less than twenty-four feet.

[Chap. 220, Acts of 1927.]

*Courts:* Courts shall conform to the regulations prescribed in sixty-five foot districts. In a single or general residence district no window required by the aforesaid building law shall open upon an outer court the depth of which exceeds its width or upon any inner court.

*Set-back:* In a single or general residence district no building shall hereafter be erected or altered to be within thirty feet of the center of the street on which it fronts or within ten feet of the street line, provided that on a lot between two buildings not more than sixty feet apart the set-back need not exceed the greater of the set-backs of such buildings.

Between the lines of streets intersecting at an angle of less than one hundred and thirty-five degrees and a line joining points on such lines twenty feet distant from their point of intersection no building or structure may be erected and no vegetation may be maintained above a height three and one half feet above the plane through their curb grades.

*Building Area:* The area of a dwelling shall not exceed

thirty-five per cent of the area of the lot. The area of a building other than a dwelling shall not exceed sixty per cent of the area of the lot.

#### FORTY FOOT DISTRICTS.

SECTION 12. In a forty foot district:—

*Height:* No building shall exceed forty feet or three stories in height.

*Rear Yards:* There shall be behind every building other than an accessory building a rear yard extending across the entire width of the lot and having a minimum depth of twenty feet.

*Side Yards:* There shall be a side yard on each side of every building or attached group of buildings other than accessory buildings in a single or general residence district unless there is a party wall. The minimum width of any side yard provided in a forty foot district shall be six feet which shall be increased three inches for every ten feet or fraction thereof that the length of the side yard exceeds fifty feet, provided that on no lot held under a separate and distinct ownership from adjacent lots and of record at the time it is placed in a forty foot district shall the buildable width be reduced by this requirement to less than twenty-four feet.

*Courts:* Courts shall conform to the regulations prescribed in sixty-five foot districts, provided that in a single or general residence district no window required by the aforesaid building law shall open upon any inner court the length or width of which is less than its average height.

*Set-back:* In a single or general residence district no building shall hereafter be erected or altered to be within twenty-five feet of the center of the street on which it fronts or within ten feet of the street line, provided that on a lot between two buildings not more than sixty feet apart the set-back need not exceed the greater of the set-backs of such buildings.

Between the lines of streets intersecting at an angle of less than one hundred and thirty-five degrees and a line joining points on such lines fifteen feet distant from their point of intersection no building or structure may be erected and no vegetation may be maintained above a height three and one half feet above the plane through their curb grades.

*Building Area:* The area of a dwelling shall not exceed sixty per cent of the area of the lot. The area of a building other than a dwelling shall not exceed seventy per cent of the area of the lot.

#### SIXTY-FIVE FOOT DISTRICTS.

SECTION 13. In a sixty-five foot district:—

*Height:* No building shall exceed sixty-five feet or five stories in height.

*Yards and Courts:* There shall be in the rear of every building other than an accessory building a rear yard extending across the entire width of the lot, provided that no rear yard shall be required for any building in those cases enumerated in section fifty-six of the aforesaid building law. All yards and courts shall conform to the requirements prescribed for tenement houses by the aforesaid building law.

*Set-back:* In a single or general residence district, in a sixty-five foot district and in any adjacent forty foot or thirty-five foot district on lots fronting on one side of a street between two intersecting streets no buildings shall hereafter be erected or altered to be nearer the street line than the average set-back of existing buildings within such limits, subject to the following provisions:

1. No set-back need exceed ten feet in any case. Any reduced set-back thus established shall be used in computing the average set-back.

2. On a lot between two buildings not more than sixty feet apart the set-back need not exceed the greater of the

set-backs of such buildings. Any set-back thus established shall be included in computing the average set-back.

Between the lines of streets intersecting at an angle of less than one hundred and thirty-five degrees and a line joining points on such lines ten feet distant from their point of intersection no building or structure may be erected and no vegetation may be maintained above a height three and one half feet above the plane through their curb grades.

*Building Area:* The area of a dwelling shall not exceed seventy per cent of the area of the lot. The area of a building other than a dwelling shall not exceed eighty per cent of the area of the lot.

#### EIGHTY FOOT DISTRICTS.

SECTION 14. In an eighty foot district:—

*Height:* No building shall exceed the height limit heretofore in effect in district B as established by the commission on height of buildings in the city of Boston under chapter three hundred and thirty-three of the acts of nineteen hundred and four, and as thereafter revised; provided, that nothing herein shall be construed to affect the now existing limit of the height of buildings abutting on Commonwealth avenue between Arlington and Kenmore streets.

*Set-back:* Between the lines of streets intersecting at an angle of less than one hundred and thirty-five degrees and a line joining points on such lines five feet distant from their point of intersection no building or structure may be erected and no vegetation may be maintained above a height three and one half feet above the plane through their curb grades.

*Building Area:* In a single or general residence district and for dwellings in any use district the area of a building shall not exceed eighty per cent of the area of the lot. For other buildings no requirements are herein prescribed.

ONE HUNDRED AND FIFTY-FIVE FOOT DISTRICTS.

SECTION 15. In a one hundred and fifty-five foot district:—

*Height:* No building shall exceed the height heretofore in effect in district A as established by the commission on height of buildings in the city of Boston under chapter three hundred and thirty-three of the acts of nineteen hundred and four, and as thereafter revised.

#### BULK DISTRICT REGULATIONS AND EXCEPTIONS.

SECTION 16. The foregoing requirements in the bulk districts shall be subject to the following exceptions and regulations:

##### *Height.*

(1) In a thirty-five foot or forty foot district a single-family dwelling or building for recreational use may be built to a height of three and one half stories but not exceeding forty-five feet, and an educational, religious, philanthropic or other institutional building may be built to a height of five stories, but not exceeding sixty-five feet, provided in each case the building sets back from each street and lot line, in addition to other yard and set-back requirements, ten feet plus one foot for each foot of such height in excess of the height limit; and a telephone exchange office may be built to a height of five stories but not exceeding sixty-five feet, provided that the part of the building above the height limit sets back ten feet from each street and lot line, in addition to other yard and set-back requirements.

(2) In an industrial or unrestricted district all dwellings shall conform to the regulations herein prescribed for dwellings in forty foot districts.

(3) Structures specified in and exempted from height limitation by section four of chapter three hundred and eighty-three of the acts of nineteen hundred and five, as

amended by section one of chapter one hundred and fifty-six of the Special Acts of nineteen hundred and nineteen, by chapter one hundred and seventy-four of the acts of nineteen hundred and twenty-two and by section twenty-seven of chapter four hundred and sixty-two of the acts of nineteen hundred and twenty-three, may be erected above the height limit herein established.

*Area.*

(4) In a thirty-five foot or forty foot district on a lot less than one hundred feet deep the depth of a rear yard may be reduced to one per cent of the depth required in preceding sections of this act for each foot of lot depth, but in no such case to less than twelve feet.

(5) In a thirty-five foot or forty foot district where there is a street, alley, railroad right of way, public park or cemetery along the rear or side of a lot, the measurement of the depth of rear yard and width of side yard may be made to the center of such street, alley, right of way, park or cemetery, and for that portion of the lot within twenty-five feet of any such rear or side, the building area may be increased by an additional ten per cent of such portion of the lot.

(6) In a thirty-five foot or forty foot district where there is a street, alley, railroad right of way, public park or cemetery along the side of a lot, for that portion of the lot within twenty-five feet of such side the depth of rear yard may be reduced six feet.

(7) In a thirty-five foot or forty foot district where a lot containing ten thousand square feet or less is entirely surrounded by streets or by streets and alleys or a railroad right of way, public park or cemetery, the building area may be increased twenty per cent.

(8) In a sixty-five foot or eighty foot district on a lot where no yard is required the building area may be increased thirty per cent.



(9) No part of a yard required for a dwelling shall be higher in level above the floor of the first dwelling story than one foot for each two feet of distance from the building or for other buildings a similar distance above the second story floor.

(10) Every part of a required yard or court shall be open from its lowest point to the sky unobstructed except for the projections of skylights above the bottom of such yard or court, and except for the ordinary projections of window-sills, belt courses and other ornamental features, to the extent of not more than four inches. Cornices may not extend more than four inches into any court nor more than eighteen inches into any yard. Open or lattice-enclosed iron fire escape or unenclosed outside stairs may project into the rear or side yard a distance of not more than four feet, provided that the exact location thereof received the approval of the building commissioner.

(11) The limitation of building area herein prescribed shall apply in a thirty-five foot or forty foot single or general residence district at the curb graded; for a dwelling in any other district at a level not more than two feet above the first story floor; elsewhere not more than two feet above the second story floor; and not more than twenty feet above the mean curb grade in any case.

(12) On a lot occupied by a dwelling other than a tenement house a one-story building of accessory use thereto and not more than fifteen feet high measured to the mean height of the gable may be located in and occupy not more than thirty per cent of the rear yard of such dwelling. The area occupied by such a building of accessory use shall not be included as occupied area in computing the percentage of lot occupancy.

(13) Chimneys or flues may be erected within the limits prescribed for yards, provided that they do not exceed five square feet in total horizontal area and do not obstruct ventilation.

## BOUNDARIES OF DISTRICTS.

SECTION 17. Unless otherwise indicated, the district boundary lines are the center lines of streets, alleys, parkways or railroad rights of way, or such lines extended. Other lines within blocks less than two hundred feet wide are median lines between their sides; other lines within blocks two hundred feet or more wide are one hundred feet distant from the less restricted side of the block.

Where the boundary line of a district divides a lot in a single or joint ownership at the time such district is established, a building or use authorized on the less restricted portion of such lot may extend to the entire lot. but in no case for a distance of more than thirty feet. Where the street or alley layout actually on the ground varies from the layout as shown on the zoning map the building commissioner shall interpret said map according to the reasonable intent of this act.

## ENFORCEMENT; PERMITS.

SECTION 18. It shall be the duty of the building commissioner of the city of Boston to enforce the provisions of this act in manner and form and with powers similar to those practised or provided under the aforesaid building law. No permit shall be issued for the construction, alteration or moving of any building or part thereof unless the plans and intended use indicate that the building and the premises are to conform in all respects to the provisions of this act.

Upon any well founded information in writing from any person aggrieved that the provisions of this chapter are being violated or upon his own initiative, the building commissioner shall take immediate steps to enforce the provisions of this act by causing complaint to be made before the municipal court of the city of Boston or by applying for an injunction in the superior court.

It shall be unlawful to use or permit the use of any

premises or building or part thereof hereafter erected, or altered wholly or partly, or the yards, courts or other open spaces of which are in any way reduced, until the building commissioner shall have certified on the building permit or in case no building permit is issued, shall have issued a use permit specifying the use to which the premises, or the building upon being sufficiently completed to comply with the provisions and regulations relating thereto, may be put.

#### APPEALS.

SECTION 19. The board of appeal provided for in paragraph one of section six of the aforesaid building law shall act as a board of appeal under this act, and the members thereof shall receive for acting under this act the same compensation as provided in the aforesaid building law.

Any applicant for a permit under this act whose application has been refused may appeal therefrom within ninety days. Any applicant to the building commissioner for a permit who appeals to the said board shall pay to him a fee of ten dollars before such permit shall be considered by the board. Such fees shall be deposited by the building commissioner with the city collector at least once a week.

The board of appeal may vary the application of this act in specific cases wherein its enforcement would involve practical difficulty or unnecessary hardship and wherein desirable relief may be granted without substantially derogating from the intent and purpose of this act, but not otherwise. No such variance shall be authorized except by the unanimous decision of the entire membership of the board, rendered upon a written petition addressed to the board and after public hearing thereon, of which notice shall be mailed to the petitioner and to the owners of all property deemed by the board to be affected thereby as they appear in the

most recent local tax list and also advertised in a daily newspaper published in the city of Boston.

The board shall cause to be made a detailed record of all its proceedings, which record shall set forth the reasons for its decisions, the vote of each member participating therein, and the absence of a member or his failure to vote. Such record, immediately following the board's final decision, shall be filed in the office of the building commissioner and shall be open to public inspection, and notice of such decision shall be mailed forthwith to each party in interest as aforesaid.

Any person aggrieved by a decision of the board of appeal, whether previously a party to the proceeding or not, or any municipal officer or board may, within fifteen days after the entry of such decision, bring a petition in the supreme judicial court for the county of Suffolk for a writ of certiorari to correct errors of law therein, and the provisions of section four of chapter two hundred and forty-nine of the General Laws shall, except as herein provided, apply to said petition.

No costs shall be allowed against the board unless the court finds that it acted with gross negligence or in bad faith.

#### BOARD OF ZONING ADJUSTMENT.

SECTION 20. There shall be a board of zoning adjustment to consist of twelve members as follows:— The chairman of the city planning board ex officio, and eleven members appointed by the mayor in the following manner: one member from two candidates nominated by the Associated Industries of Massachusetts, one member from two candidates nominated by the Boston Central Labor Union, one member from two candidates nominated by the Boston Chamber of Commerce, one member from two candidates to be nominated by the Boston Real Estate Exchange, one member from two candidates to be nom-

inated by the Massachusetts Real Estate Exchange, one member from two candidates, one to be nominated by the Boston Society of Architects and one by the Boston Society of Landscape Architects, one member from two candidates to be nominated by the Boston Society of Civil Engineers, one member from two candidates to be nominated by the Master Builders' Association of Boston, one member from two candidates to be nominated by the Team Owners' Association, one member from two candidates to be nominated by the United Improvement Association, and one member to be selected by the mayor. All appointive members shall be residents of or engaged in business in Boston. Two of the appointments first made shall be for the term of one year, two for the term of two years, two for the term of three years, two for the term of four years, and two for the term of five years, respectively, so that the terms of two members will expire each year. All subsequent appointments shall be for the term of five years. Vacancies among the appointive members shall be filled in the same manner in which original appointments are made. The several heads of departments of the city of Boston shall on request of the board supply it with all information in their possession useful for its duties.

Either upon petition or otherwise, the board may, subject to the following conditions, change the boundaries of districts by changing the zoning map, on file at the state secretary's office, to meet altered needs of a locality, to avoid undue concentration of population, to provide adequate light and air, to lessen congestion in streets, to secure safety from fire, panic and other dangers, to facilitate the adequate provisions of transportation, water, sewerage and other public requirements and to promote the health, safety, convenience and welfare of the inhabitants of the City of Boston. Such changes shall be made with reasonable consideration, among other things,

of the character of the district and its peculiar suitability for particular uses, and with a view to conserving the value of buildings and encouraging the most appropriate use of land. No such change shall be made except by the decision of not less than four fifths of the members of the board, excepting only any member or members not qualified to act, rendered after a public hearing thereon, of which notice shall be mailed to the petitioner, if any, to the building commissioner, the chairman of the assessing department, the chairman of the street laying-out department, the commissioner of public works, the fire commissioner and the health commissioner of the city of Boston, and to the owners of all property deemed by the board to be affected thereby as they appear in the most recent local tax list and also advertised in a daily newspaper published in the city of Boston. No member shall act in any case in which he is personally interested either directly or indirectly.

The board shall cause to be made a detailed record of all its proceedings, which record shall set forth the reasons for its decisions, the vote of each member participating therein, and the absence of a member or his failure to vote. Such record, immediately following the board's final decision, shall be filed in the office of the building commissioner of Boston and shall be open to public inspection, and notice of such decision shall be mailed forthwith to each party in interest as aforesaid. Upon any decision changing the zoning map, on file at the state secretary's office, an amended map showing such change endorsed by the chairman of said board shall be filed forthwith at said office.

If a change be favorably decided upon, any person aggrieved or any municipal officer or board may, within fifteen days after the entry of such decision, bring a petition in the supreme judicial court for the county of Suffolk for a writ of certiorari setting forth that such

decision is in whole or part not in accordance with the duties and powers of such board as above prescribed and specifying the particulars of such non-compliance. The provisions of section four of chapter two hundred and forty-nine of the General Laws shall, except as herein provided, apply to said petition.

No costs shall be allowed against the board unless the court finds that it acted with gross negligence or in bad faith.

The board shall not reduce in any way the area of the one hundred and fifty-five foot district established by this act.

The board shall report its doings annually on or before the tenth day of February to the mayor of Boston and to the general court.

If any area is hereafter transferred to another district by a change in district boundaries either by action of the board of zoning adjustment or by an amendment to this act, the buildings and uses then existing within said area shall be subject to the provisions of this act with reference to existing buildings or uses in the district to which the area is removed.

#### JURISDICTION; PENALTIES.

SECTION 21. The jurisdiction of courts in equity and at law and penalties for violation of any of the provisions of this act shall be as set forth in the aforesaid building law for violations thereof.

#### INTERPRETATION AND APPLICATION.

SECTION 22. In interpreting and applying the provisions of this act they shall be held to be the minimum requirements for the promotion of health, safety, convenience and welfare of the inhabitants of the city of Boston. This act shall not interfere with, abrogate, annul or repeal any statute previously enacted, relating to the use of

buildings or premises, provided, however, that where this act imposes a greater restriction upon the use of buildings or premises or upon the height of buildings or requires larger open spaces than imposed or required by such statute, the provisions of this act shall control.

The provisions of this act shall not apply to buildings or land belonging to and occupied by the United States or the commonwealth.

A building or premises used or to be used by a public service corporation may be exempted from the operation of this act if, upon a petition of the corporation, the department of public utilities shall, after a public hearing, decide that the present or proposed situation of the building or premises in question is reasonably necessary for the convenience or welfare of the public.

[1928, c. 70.]

[See chapter 70, Acts 1928, page 394.]

#### EXISTING BUILDINGS AND PERMITS.

SECTION 23. Nothing in this act shall prevent the substantial restoration within twelve months and continuance of use of a building which has been damaged by fire, explosion, flood, riot, act of the public enemy or accident of any kind to such an extent that the estimated cost of such restoration does not exceed three quarters of the fair value of the building based on replacement cost immediately prior to such damage. In the case of a building not conforming in use or in bulk to the regulations for the district in which it is located and so damaged to a greater extent, the building commissioner may grant a permit for restoration and continuance of use where neither will be detrimental or injurious to the character of the neighborhood.

Nothing in this act shall require any change in the plans, construction or intended use of a building for which a building permit has heretofore been issued, and the construction of which shall have been diligently



prosecuted within six months of the date of such permit, and the ground story framework of which, including the second tier of beams, shall have been completed within such six months, and which entire building shall be completed according to such plans as filed within two years from the date this act takes effect. Nothing herein shall prevent the restoration of a wall or other structural part of a building declared unsafe by the building commissioner.

## VALIDITY.

SECTION 24. The invalidity of any section or provision of this act shall not invalidate any other section or provision hereof.

## WHEN EFFECTIVE.

SECTION 25. This act shall take effect upon its passage.  
*[Approved June 5, 1924.]*

## DEFINITION.

STATUTES. MEANING OF CERTAIN WORDS IN  
 CONSTRUING SAME.

[General Laws, Chapter 4, Section 7.]

Thirty-fourth, "Town," when applied to towns or officers or employees thereof, shall include city.

[G. S. 3, Sect. 7, cl. 17; 140 Mass. 381; 187 Mass. 150; P. S. 3, Sect. 3, cl. 23; 148 Mass. 148; 191 Mass. 78; R. L. 8, Sect. 5, cl. 23; 153 Mass. 40; R. S. 2, Sect. 6, cl. 17.]

## GENERAL LAWS, CHAPTER 45.

PUBLIC PARKS, PLAYGROUNDS AND THE PUBLIC DOMAIN,  
*Erection of Buildings Upon Parks.*

SECTION 7. Land taken for or held as a park under this chapter shall be forever kept opened and maintained as a public park, and no building which exceeds six hundred square feet in area on the ground shall be erected on a common or a park dedicated to the use of the public with-

out leave of the general court; but, except in parks in Boston and in parks comprising less than one hundred acres in extent, structures for shelter, refreshment and other purposes may be erected of such material and in such places as, in the opinion of the fire commissioners, if any do not endanger buildings beyond the limits of such park. The superior court shall have jurisdiction in equity upon petition of not less than ten taxable inhabitants of the city or town in which such common or park is located, to restrain the erection of a building on a common or park in violation of this section.

[1877, c. 223, Sects. 1, 2; P. S. C. 54, Sects. 16, 17; 1882, c. 154, Sect. 10; 1893, c. 75; R. L. C. 28, Sect. 11, c. 53, Sect. 20; 1917, c. 344, vi., Sect. 10; 164 Mass. 419; 166 Mass. 347; 212 Mass. 583.]

*Building Line. Height of Buildings on Parkways.*

SECTION 11. In a city which by a vote of its city council, or in a town which by a vote of a town meeting, accepts this section, or has accepted corresponding provisions of earlier laws, the park commissioners may, in accordance with section thirty-seven of Chapter eighty-two, establish a building line distant at no point more than twenty-five feet from any exterior line of a way under their control or the part of a public way on which a park abuts; and the extreme height to which buildings upon such ways may be erected shall be seventy feet exclusive of such steeples, towers, domes, cornices, parapets, balustrades, sculptured ornaments, chimneys and roofs as such board may approve.

[1896, c. 313; 1896, c. 370; R. L. c. 28, Sect. 16.]

---

SPITE FENCES.

*Fence a Nuisance.*

[General Laws, Chapter 49, Section 21.]

SECTION 21. A fence or other structure in the nature of a fence which unnecessarily exceeds six feet in height and is

maliciously erected or maintained for the purpose of annoying the owners or occupants of adjoining property shall be deemed a private nuisance. Any such owner or occupant injured in the comfort or enjoyment of his estate thereby may have an action of tort for damages under chapter two hundred and forty-three.

[1887, c. 348; R. L. 33, Sect. 19; 148 Mass. 368, 407; 150 Mass. 482; 162 Mass. 543.]

---

## BUILDING LINES.

[GENERAL LAWS, CHAPTER 82, SECTION 37.]

SECTION 37. If a city by its city council or a town accepts this section or has accepted corresponding provisions of earlier laws, a building line not more than forty feet distant from the exterior line of a highway or town way may be established in the manner provided for laying out ways, and thereafter no structure shall be erected or maintained between such building line and such way, except steps, windows, porticos and other usual projections appurtenant to the front wall of a building, to the extent prescribed in the vote establishing such building line, and except that buildings or parts of buildings, embankments, steps, walls, fences and gates existing at the time of the establishment of the building line may be permitted to remain and to be maintained to such extent and under such conditions as may be prescribed in the vote establishing such building line. Whoever sustains damage thereby may recover the same under chapter seventy-nine. A building line established under this section may be discontinued in the manner provided for the discontinuance of a highway or town way. Whoever sustains damages by the discontinuance of a building line may recover the same under chapter seventy-nine.

[1893, c. 462; R. L. 48, Sect. 103; 1913, 572, Sect. 1; 1917, c. 56, 344, c. 11, Sect. 73.]

## STORM WATER.

*Separate System of Plumbing.*

[General Laws, Chapter 83, Section 5.]

SECTION 5. In this section surface or storm water and such other waters as shall be specified by the department of public health shall be designated as waters and all other waters and sewerage shall be designated as sewage. When a town has provided both a drain for waters and a sewer for sewage in a public way, the owner of every parcel of land abutting on such way or connected with such drain or sewer shall arrange his plumbing so that the waters shall be kept separate from the sewage; and shall make such connections with the drain and sewer respectively that the waters shall pass into the drain and the sewage into the sewer in accordance with the directions of the board or officer having charge of the repair and maintenance of sewers in such town.

[1903, c. 383, Sect. 1.]

SIGNS AND OTHER STRUCTURES PROJECTING  
INTO WAYS.*Permits for Signs and Other Structures Projecting into Ways.*

[General Laws, Chapter 85, Sections 8 and 9.]

SECTION 8. The municipal board or officer having charge of the laying out of public ways may grant permits for the placing and maintaining of signs, advertising devices, clocks, marquees, permanent awnings and other like structures projecting into or placed on or over public ways in its town, and may fix the fees therefor, not exceeding one dollar for any one permit, and may make rules and regulations relating thereto, and prescribe the penalties for a breach of any such rules and regulations, not exceeding five dollars for each day during which any

such structure is placed or maintained contrary to the rules and regulations so made, after five days' notice to remove the same has been given by such board or officer, or by a police officer of the town. All such structures shall be constructed, and, when attached to a building, shall be connected therewith, in accordance with the requirements of the inspector of buildings, building commissioner or other board or officer having like authority in the town.

[1915, c. 176, Sects. 12; 1917, c. 344, V. Sects. 9, 10.]

*Not Applicable to Certain Structures.*

SECTION 9. The preceding section shall not apply to signs or other structures projecting into or over the way a distance of less than six inches, nor to poles, wires, conduits, and appurtenances of railroad, railway, telegraph and telephone, water, gas, electric light, heat and power companies.

[1915, c. 176, Sect. 3; 1917, c. 344, V, Sect. 11.]

---

## COMMON NUISANCES.

### BURNT OR DANGEROUS BUILDINGS.

[General Laws, Chapter 139, Sections 1 and 3.]

SECTION 1. In a city or town in which the city council or the inhabitants of the town accept this and the two following sections or have accepted corresponding provisions of earlier laws, the aldermen or selectmen, after written notice to the owner of a burnt, dilapidated or dangerous building, or his authorized agent, and after a hearing, may make and record an order adjudging it to be a nuisance to the neighborhood, or dangerous, and prescribing its disposition, alteration or regulation. The town clerk shall deliver a copy of the order to an officer qualified to serve civil process, who shall forthwith serve

an attested copy thereof in the manner prescribed in section one hundred and twenty-four of chapter one hundred and eleven, and make return to said clerk of his doings thereon.

[1855, c. 469, Sects. 1, 6; G. S. 87, Sect. 1; P. S. 101, Sect. 1; R. L., 101, Sect. 1; 1919, 333, Sect. 7; 1920, c. 5.]

*Owner Aggrieved May Appeal to Superior Court.*

SECT. 2. A person aggrieved by such order may appeal to the superior court for the county where such building is situated, if, within three days after the service of such attested copy upon him, he presents to such court a petition stating his grievance and the order of the board. After such notice to the board as the court shall order, trial by jury shall be had as in other civil causes. The jury may affirm, annul or alter such order, and the court shall render judgment in conformity with said verdict, which shall take effect as an original order. If the order is affirmed, the petitioner shall pay the costs; if it is annulled, he shall recover from the town his damages, if any, and costs; and if it is altered, the court may render such judgment as to costs as justice shall require.

[1885, c. 469, Sects. 3-5; G. S. 87, Sects. 2-4; 1873, c. 261, P. S. 101, Sects. 2-4; R. L. 101, Sects. 2-4; 1919, c. 333, Sect. 7; 1920, c. 5.]

*Nuisances May be Abated, etc.*

SECT. 3. The aldermen or selectmen shall have the same power to abate and remove any such nuisance as is given to the board of health of a town under sections one hundred and twenty-three to one hundred and twenty-five, inclusive, of chapter one hundred and eleven.

[1885, c. 469, Sect. 2; G. S. 87, Sect. 5; P. S. 101, Sect. 5; R. L. 101, Sect. 5.]

## LICENSES.

## PUBLIC LODGING HOUSES.

*Definition.*

[General Laws, Chapter 140, sections 33, 35, 38, 40.]

SECTION 33. In cities of over fifty thousand inhabitants every building not licensed as an inn, in which ten or more persons are lodged free or for a charge of twenty-five cents or less for each person for a day of twenty-four hours, or for any part thereof, shall be deemed a public lodging house within the meaning of sections thirty-four to forty, inclusive. No building or part thereof erected, altered or converted to be used as such a public lodging house shall have the sleeping compartments arranged on the cubicle plan.

[1894, c. 414, Sect. 1; 1904, c. 242, Sects. 1, 8; 1911, c. 129; 1915, c. 160, Sect. 1.]

*Inspection of Means of Escape from Fire.*

SECT. 35. No such license shall be granted in any such city until the inspector of buildings thereof, or the other officer or board having authority to administer the laws and ordinances in regard to the construction of buildings therein, has certified that the building, if it has eight or more rooms or ten or more persons are accommodated above the second story, complies with the requirements of chapter one hundred and forty-three, and in other cases is provided with sufficient means of escape in case of fire, and that suitable appliances are provided for extinguishing fires and for giving alarm to the inmates in case of fire; and such officer or board may from time to time require such alterations to be made or such additional appliances to be provided as may in his or its judgment be necessary for the protection of life and property in case of fire.

[1894, c. 414, Sect. 3; 1904, c. 242, Sects. 3, 8; 1913, 655, Sect. 20.]

[For penalty see Sect. 40.]

*Access for Purposes of Inspection.*

SECT 38. The keeper of every public lodging house shall at all times, when so required by an officer of the building department, of the health department, or of the police department, give him free access to said house or any part thereof.

[1894, c. 414, Sect. 6; 1904, c. 242, Sects. 6, 8.]

[For penalty, see Sect. 40.]

*Penalty.*

SECT. 40. Any keeper of a public lodging house who violates any provision of sections thirty-five to thirty-eight, inclusive, shall be punished by a fine of one hundred dollars.

[1894; c. 414, Sect. 7; 1904, c. 242, Sects. 7, 8.]

---

## SUPERVISION OF PLUMBING.

[GENERAL LAWS, CHAPTER 142.]

*Definitions.*

SECTION 1. In this chapter the following words shall have the following meanings:

“Certificate,” certificates of registration issued in accordance with section three of chapter five hundred and thirty-six of the acts of nineteen hundred and nine, section two of chapter five hundred and ninety-seven of the acts of nineteen hundred and ten or chapter five hundred and eighteen of the acts of nineteen hundred and twelve.

“Examiners,” state examiners of plumbers appointed under section ten of chapter seventeen.

“Journeyman,” a person who himself does any work in plumbing subject to inspection under any law, ordinance, by-law, rule or regulation.

“Master plumber,” a plumber having a regular place of business and who, by himself or journeymen plumbers in his employ, performs plumbing work.



“Practical plumber,” a person who has learned the business of plumbing by working for at least two years as an apprentice or under a verbal agreement for instruction and who has then worked for at least one year as a journeyman plumber.

“Registered,” registered in accordance with section three of chapter five hundred and thirty-six of the acts of nineteen hundred and nine, section two of chapter five hundred and ninety-seven of the acts of nineteen hundred and ten or chapter five hundred and eighteen of the acts of nineteen hundred and twelve.

[1894, c. 455, Sect. 1; R. L. 103, Sect. 1; 1909, c. 536, Sect. 9; 219 Mass. 33; 225 Mass. 192.]

#### *Application of Chapter.*

SECT. 2. Sections one to seven, inclusive, sections eleven and twelve and sections fourteen to sixteen, inclusive, shall apply to all cities and section thirteen shall apply to all cities except Boston; provided, that any such city except Boston may by vote of its city council exempt from the provisions of said sections any or all of its territory lying outside of the limits of the water supply of such city, or unconnected with a common sewer. Sections one, three, six and seven and sections eleven to sixteen, inclusive, shall apply to all towns which by vote of their inhabitants accept said sections or have accepted corresponding provisions of earlier laws, and said sections, except section thirteen, shall apply to all towns which accept rules formulated by the examiners under sections eight and nine or have accepted them under corresponding provisions of earlier laws.

[1895, c. 453; R. L. 103, Sect. 12; 1909, c. 536, Sect. 8; 1910, c. 349.]

[Sect. 4; 1911, c. 262.]

#### *Master Plumbers and Journeymen Must be Licensed.*

SECT. 3. No person shall engage in the business of a master plumber or work as a journeyman unless he is

lawfully registered, or has been licensed by the examiners as provided in this chapter. The license or certificate of a journeyman shall be exhibited whenever required by an inspector of plumbing. Every master plumber's license or certificate shall at all times be displayed conspicuously within his place of business.

[1893, c. 477, Sect. 1; 1894, c. 455, Sect. 1; R. L. 103, Sect. 1; 1909, c. 536, Sect. 4; 213 Mass. 138; 217 Mass. 134.]

*Rules for Examinations of Plumbers.*

SECT. 4. The examiners may make such rules as they deem necessary for the proper performance of their duties, which shall take effect when approved by the department of public health. They shall examine each applicant desiring to engage in the business of a master plumber or to work as a journeyman, as to his practical knowledge of plumbing, house drainage and plumbing ventilation and subject him to a practical test satisfactory to the examiners, who are satisfied of his competence shall issue to him a license as applied for. They shall hold frequent examinations in Boston and, twice in each year, hold examinations at five other convenient places within the commonwealth. Public notice shall be given of all examinations. Every application for examination shall be in the handwriting of the applicant who shall be notified by the examiners of the time and place of examination. The examiners may, without payment of any fee issue a probationary license in force for six months to a person who, having worked as an apprentice, or under a verbal agreement for instruction, for not less than three years, presents an application therefor with the signed endorsement of his employer agreeing to be responsible for all work done under the license and to have the licensee, at the expiration of the license, present himself for examination as a journey man.

[1893, c. 477, Sects. 2, 4; 1894, c. 455, Sects. 2, 4; R. L. 103, Sects. 2, 4; 1909, c. 536, Sect. 2; Mass. 192.]

*Fees for Licenses, Examinations and Renewals.*

SECT. 5. The fee for the license of a master plumber shall be two dollars; for examination and for renewals fifty cents each; for the license of a journeyman fifty cents each.

[R. L. 103, Sect. 4; 1909, c. 536, Sect. 3; 1893, c. 477, Sect. 4; 1894, c. 455, Sect. 4.]

*Licenses, Validity of — Registration and Revocation of.*

SECT. 6. Licenses and certificates issued by the examiners shall be valid throughout the commonwealth, but shall not be assignable or transferable. The examiners shall forward to the board of health of each town, or to the inspector of buildings having control of the enforcement of regulations relative to plumbing in such town, the names and addresses of all persons in such town to whom such licenses have been granted. Licenses shall be issued for one year and may be renewed annually on or before May first upon payment of the required fee. Each holder of a master plumber's certificate or license shall register his name and business address with said inspector of buildings if he has such control, otherwise with the board of health, in the town wherein he desires to engage in business as a master plumber. Any such license or certificate may, after notice and hearing, be suspended or revoked by the examiners upon the violation by the holder thereof of any statute, ordinance, by-law, rule or regulation relative to plumbing, upon failure or refusal of the holder thereof to comply with the rules and requirements of the examiners, or for other sufficient cause.

[1928, chap. 76, Sect. 1.]

*Temporary Suspension of License.*

SECT. 7. If in the opinion of such inspector of buildings, if any, otherwise of the board of health, of a town,

the holder of a license or certificate violates any statute, ordinance, by-law, rule or regulation relative to plumbing, the said inspector or board of health of the town where such violation is committed shall give notice to the examiners.

[1909, c. 536, Sect. 4, 1928, c. 76, Sect. 2.]

*Appointment and Duties of Inspectors.*

SECT. 11. The said inspector of buildings, if any, otherwise the board of health, of each city and town, shall, within three months after it becomes subject to sections one to sixteen, inclusive, appoint from the classified civil service list one or more inspectors of plumbing who shall be practical plumbers and shall have had practical experience either as master plumbers or journeymen, continuously, during five years next preceding their appointment; provided, that any time spent in service in the army, navy or marine corps of the United States in time of war or insurrection shall be deemed a part of the period of continuous practical experience so required. Such inspector of buildings or board may remove them for cause shown and shall, subject to approval of the city council or selectmen, fix their compensation which shall be paid by the city or town. Said inspectors of plumbing shall inspect all plumbing in process of construction, alteration or repair for which permits are granted within their respective cities and towns and shall report to their appointing power or board violations of any law, ordinance, by-law, rule or regulation relative to plumbing; they shall perform such other appropriate duties as may be required. The approval of plumbing by any inspectors other than those provided for by this chapter shall not be a compliance therewith.

[1893, c. 477, sect. 5; 1894, c. 455, sect. 5; 1895, c. 453, R. L. 103.]

[Sect. 5; 1909, c. 536, Sect. 7.]

*Appointment of Additional Inspectors.*

SECT. 12. No inspector of plumbing shall inspect or approve any plumbing work done by himself, his employer, employee or any one employed with him, but in a city or town subject to sections one to sixteen, inclusive, the said inspector of buildings, or the board of health, shall in the manner provided in the preceding section appoint an additional inspector of plumbing as therein provided who shall inspect plumbing so done. Said additional inspector may act in the absence or disability of the local inspector and for his services shall receive like compensation. This section shall not apply to any city or town establishing an annual salary for the inspector of plumbing and in such city or town the inspector of plumbing shall not engage in or work at the business of plumbing.

[1894, c. 455, Sect. 6; R. L. 103, Sect. 6.]

*Persons Learning Business of Plumbing.*

SECT. 14. Sections one to sixteen, inclusive, shall apply to all persons learning the business of plumbing when they are sent out to do the work of a journeyman.

[1894, c. 455, Sect. 9; R. L. 103, Sect. 9.]

*Expenditure of Fees.*

SECT. 15. Inspectors of buildings and boards of health may expend such portion of the fees collected by them under this chapter as is necessary to properly perform the duties imposed thereby, and they shall annually, before June first, make a detailed report to their respective cities or towns of all their proceedings under sections one to sixteen, inclusive, during the preceding year.

[1894, c. 455, Sect. 11; R. L. 103, Sect. 11.]

*Penalty for Certain Violations.*

SECT. 16. Every person engaged in the business of a master plumber or working as a journeyman not lawfully

registered or licensed, if required by this chapter; and every person engaging in or working at the business of plumbing in a city or town when forbidden so to do under section seven; and every master plumber who engages or employs any person to work as a journeyman who has not been so registered or licensed; and every person violating any provision of sections one to fifteen, inclusive, of this chapter or any ordinance, by-law, rule or regulation made thereunder shall be punished by fine not exceeding fifty dollars. Any city or town subject to the preceding sections of this chapter neglecting to comply with any of its provisions shall forfeit fifty dollars to the use of the commonwealth for each month during which such neglect continues.

[1888, c. 105, Sect. 2; 1893, c. 477, Sect. 7; 1894, c. 455, Sect. 8; R. L. 103, Sect. 8; 1909, c. 536, Sect. 10; 1914, c. 287; 219 Mass. 219; 225 Mass. 192.]

*Marking, etc., of Range Boilers.*

SECT. 17. No range boiler shall be sold or offered for sale unless its capacity is plainly marked thereon in terms of Massachusetts standard liquid measure, and with the maker's business name, in such manner as to be easily identified.

[1916, c. 154, Sect. 1.]

*Same Subject.*

SECT. 18. No copper, iron or steel pressure range boiler, plain or galvanized, or other vessel or tank in which water is to be heated under pressure, shall be sold or offered for sale without having stamped thereon the maker's guarantee that it has been tested to not less than two hundred pounds hydraulic or hydrostatic pressure to the square inch, together with the maximum working pressure at which it may be installed. And no such boiler, or other vessel or tank in which water is to be heated

under pressure, shall be installed if the working pressure is greater than forty-two and one half per cent of the guaranteed test pressure marked thereon by the maker.

[1916, c. 154, Sect. 2; 1917, c. 39, Sect. 1.]

*Penalty for Violation of Sections 17 and 18.*

SECT. 19. Whoever sells or offers or exposes for sale any range boiler not marked or stamped as provided in the two preceding sections, or which is falsely marked as having a capacity which is greater by seven and one half per cent than its true capacity, or who marks or causes the same to be marked with such false capacity, shall be punished by a fine not exceeding fifty dollars. The inspectors of plumbing within their respective cities and towns shall cause this and the two preceding sections to be enforced.

[1916, c. 154, Sect. 3; 1917, c. 39, Sect. 2.]

*Exceptions.*

SECT. 20. The three preceding sections shall not apply to the sale or offering for sale of installed range boilers or to the sale or offering for sale of range boilers as junk.

[1916, c. 154, Sect. 4.]

---

GENERAL LAWS, CHAPTER 143.

INSPECTION, REGULATION AND LICENSES FOR BUILDINGS,  
ELEVATORS AND CINEMATOGRAPHS.

GENERAL PROVISIONS.

SECT.

1. Definitions.

INSPECTION OF BUILDINGS.

17. Temporary flooring during construction.

18. Same subject.

19. Penalty.

## SECT.

22. Fire escapes to be kept clear.
23. Stairways to be kept clear.
35. Liability of licensee.
36. Inspection of theatres, etc.
37. Reports to be kept on file.
38. Copies of ratings, etc., to be sent to licensee. Penalty for noncompliance with order.
39. Copy of ratings, etc., may be posted.
40. Penalty for false statement, etc.
41. Penalty for giving or receiving free pass.
44. Watchmen in hotels, etc.
50. Penalty for hindering inspector, etc.
51. Owner must see that law is obeyed.
52. Penalty for unlicensed use as theater, etc.
53. General penalty.
54. Enforcement.
55. Appeal.
56. Fees for experts.
57. Restraining illegal erection, etc.
58. Concurrent jurisdiction of inferior courts.
59. Enforcement of inspectors' orders.
60. Restraining illegal use, etc., of buildings.
61. Notice to assessors of permits for building.

## ELEVATORS.

62. Installation and inspection.
63. Test of safety devices.
64. Report of inspection.
65. Certificate of inspection to be posted in elevator.
66. Report of accidents and of defective elevators.
67. Petition for changes in regulations.
68. Board to amend regulations.
69. Establishment of regulations.
70. Appeal.
71. Penalty.



SECT.

## CINEMATOGRAPHS.

72. Regulation.
83. Application of certain sections.
84. Penalty.
85. Special licenses for operators in churches, schools, etc.

## GENERAL PROVISIONS.

*Definitions.*

SECTION 1. In this chapter the following terms, unless a contrary meaning is required by the context or is specifically prescribed, shall have the following meanings:

“Alteration,” changes in or addition to a building.

“Department,” department of public safety.

“Inspector,” an inspector of the division of inspection of the department of public safety, except that in sections thirty-four to thirty-eight, inclusive, “inspector” shall include the inspectors of the building department of Boston and in sections sixty-three to sixty-six, inclusive, “inspector” shall include a building inspector of a city or town.

“Inspector of buildings,” a building inspector of a city or town.

“Miscellaneous hall,” a building or part thereof containing an assembly hall with a seating capacity of not more than four hundred, a society hall, or a hall in a public or private school building.

“Public building,” any building or part thereof used as a public or private institution, schoolhouse, church, theatre, special hall, public hall, miscellaneous hall, place of assemblage or place of public resort.

“Public hall,” any building or part thereof, except theatres, armories, churches and schools, containing an assembly hall with a seating capacity of more than four hundred and used for public gatherings and for such enter-

tainments, not requiring the use of scenery and other stage appliances, as the licensing officer may approve.

“Repair,” the reconstruction or renewal of a building or part thereof damaged by fire or other cause.

“Special hall,” a building or part thereof containing an assembly hall with a seating capacity of more than four hundred which may be used for occasional performances for the entertainment of spectators, with the use of scenery under such conditions as the licensing officer shall direct and for public gatherings.

“Story,” any horizontal portion through a building between floor and ceiling of which the ceiling is six feet or more above the average grade of the sidewalk or ground adjoining.

“Supervisor of plans,” an inspector of the division of inspection of the department of public safety designated by the commission of public safety to receive the plans and specifications of all buildings subject to this chapter, to be erected or in which alterations are to be made, and to act officially upon them under the direction of the chief of inspection of the department of public safety.

“Theatre,” a building or part thereof in which it is intended to make a business of the presentation of performances for the entertainment of spectators, which has a seating capacity of more than four hundred, with a stage which can be used for scenery and other stage appliances. [R. L. 104, Sect. 14; 1904, c. 450, Sect. 1; 1913, c. 610, Sect. 2; c. 655, Sects. 14, 30, 39, 41; c. 806, Sect. 1.]

#### INSPECTION OF BUILDINGS.

##### *Temporary Flooring During Construction.*

SECT. 17. If, in the erection of an iron or steel framed building, the spaces between the girders or floor beams of any floor are not filled or covered by the permanent construction of said floors before another story is added

to the building, a close plank flooring shall be placed and maintained over such spaces for the time when the beams or girders are placed in position until said permanent construction is applied; but openings protected by a strong hand railing not less than four feet high may be left through said floors for the passage of workmen or material; provided that when such flooring cannot be used without serious interference with the work of construction, such provision shall be made to protect the workmen from falling material as the inspector shall direct.

[1901, c. 166, Sect. 1; R. L. 104, Sect. 44; 1909, c. 514, Sect. 97; 1913, c. 655, Sect. 17; 194 Mass. 431; 213 Mass. 229.]

[For penalty, see Sect. 19.]

*Same Subject.*

SECT. 18. In the construction of any iron or steel framed building having a clear story of twenty-five feet elevation or more, a staging with a close plank flooring shall be placed under and not more than ten feet below the under side of the whole extent of the beams, girders or trusses of such story upon which iron or steel workers are working.

[1901, c. 166, Sect. 2; R. L. 104, Sect. 45; 1909, c. 514, Sect. 98; 1913, c. 655, Sect. 18.]

[For penalty, see Sect. 19.]

*Penalty.*

SECT. 19. Violations of any provision of the two preceding sections shall be punished by a fine of not less than fifty not more than five hundred dollars.

[1901, c. 166, Sect. 4; R. L. 104, Sect. 46; 1909, c. 514, Sect. 99; 1913, c. 655, Sect. 19.]

*Fire Escapes to be Kept Clear.*

SECT. 22. Any article placed upon a fire escape or an outside means of egress of any building is hereby declared a

common nuisance. Any court authorized to issue warrants in criminal cases may, upon complaint under oath made by any police officer that any article is placed or maintained upon a fire escape or outside means of egress of any building, issue a warrant to bring such article when found before a court having jurisdiction of the same, and all articles seized under the authority of such a warrant shall be disposed of in like manner as gaming implements seized under chapter two hundred and seventy-six. Any owner, lessee, tenant or occupant of any building who maintains or permits to remain upon any fire escape or outside means of egress of any building any article for more than twenty minutes shall be punished by a fine of not more than one hundred dollars. The existence of any article upon a fire escape or outside means of egress of any building shall be prima facie evidence that such article was so placed, maintained or permitted to remain by the occupant of the premises having access from said building to said fire escape or outside means of egress.

[1905, c. 347, Sect. 1.]

*Stairways to be Kept Clear.*

SECT. 23. Every stairway of every building shall be kept free and unobstructed, and any person who permits any article to remain in any stairway of any building in such a manner as may impede the egress of any person lawfully in said building or the ingress of any person lawfully entitled to enter said building shall be punished by a fine of not more than five hundred dollars. The existence of any article in any such stairway in any building shall be prima facie evidence that it was placed or permitted to remain therein by the owner, lessee, tenant or cocupant of the building.

[1905, c. 347, Sect. 2.]

*Licenses for Theatres, etc.*

SECT. 34. In section thirty-four to thirty-eight inclusive, the term "licensing officer" shall mean the mayor of Boston and the commissioner of public safety. In Boston the mayor and elsewhere the commissioner of public safety shall issue licenses for theatres, special halls and public halls. He may require such changes in the structural or other condition of any building before issuing any license as in his opinion the public safety requires, but no change shall be ordered in excess of the requirements for a new building of like character. In buildings existing on November first, nineteen hundred and thirteen, an equivalent of the conditions required by law may be accepted by the licensing officer; provided that such equivalents are set forth in detail in the license. The licenses provided for herein shall be conspicuously posted near the main entrance of the theatre, special hall or public hall. Licenses for theatres except in Boston shall expire on the first day of September, for special halls on the first day of August, and for public halls on the first day of July of each year.

[1904, c. 450, Sect. 2; 1905, c. 342, Sects. 1, 2; 1908, c. 335, Sect. 1; 1910, c. 284, Sect. 1; 1913, c. 655, Sect. 31.]

*Liability of Licensee.*

SECT. 35. The licensee shall be responsible, civilly and criminally, for non-compliance with the laws applicable to the theatre, special hall or public hall covered by his license, and for non-compliance with the conditions thereof. The licensing officer shall cause a complete inspection of all theatres to be made once in each month, of special halls and public halls once in every six months, and as much oftener as circumstances may require.

[1904, c. 450, Sect. 3; 1913, c. 655, Sect. 32.]

*Inspection of Theatres, etc.*

SECT. 36. Every inspection of theatres, special halls or public halls shall cover all details relating to the condition of the building as regards the safety of life and property. The inspector shall make a signed report as to all such details upon a tabulated inspection blank, the form of which shall be determined by the licensing officer. The forms of such blanks may be adapted to the circumstances of the different classes of buildings, but shall be such as to enable the inspectors to report a rating on the points and in the form hereinafter specified, and shall include a detailed table of legal requirements, with a statement as to compliance or non-compliance with each. All inspectors inspecting theatres, special halls and public halls shall on the first of each week forward to the licensing officer the reports of their inspections of the previous week, and shall rate each theatre, special hall or public hall on the following points in the following form:

1. Compliance with existing laws, non-compliance in any particular to be specified.

2. The following ratings of each building as to the safety of the audience, in the judgment of the inspectors, in the light of improved methods of insuring safety:

Condition, whether poor, fair, good or excellent.	Remarks.
(a.) Structural condition.	
(b.) Facility of escape of audience.	
(c.) Heating apparatus.	
(d.) Water supply.	
(e.) Lighting apparatus.	
(f.) Condition of fire apparatus.	
(g.) Condition of sprinklers.	
(h.) Condition of fire resisting curtain.	
(i.) Protection against neighborhood hazard.	
(j.) General condition of appliances and apparatus.	
(k.) General condition of stage.	
Rating as a whole.	
With regard to safety of audience.	

And such other points as in the opinion of the licensing officer may be suitable. These reports and ratings shall be signed by the inspectors, and shall give the date of the inspection, with such remarks upon the condition of each theatre, special hall and public hall as may be suitable to give notice of danger or to give confidence in the safety of such buildings. After each inspection of a theatre, special hall or public hall, the inspector shall post a notice in conspicuous type, near the main entrance thereof, in the following form :

This theatre (or special hall) (or public hall) has been inspected by inspector (name of inspector) on (date).

[1904, c. 450, Sect. 4; 1913, c. 655, Sect. 33.]

*Reports to be Kept on File.*

SECT. 37. The full inspection reports of theatres, special halls and public halls shall be kept on file by the licensing officer, but, except as hereinafter provided shall not be open to examination by the public until the expiration of one month from the time when they were rendered, except with the consent of the licensing officer. Every licensee shall be entitled to examine the full reports of his own building at any time. The licensing officer shall make a full report annually of the condition of all theatres, special halls and public halls, which shall be open to examination by the public at all times. The reports of inspectors shall be public records of matters of public interest; and a fair publication of these reports or parts thereof, or comment thereon, by any person, in newspapers or otherwise, shall be privileged.

[1904, c. 450, Sect. 6; 1913, c. 655, Sect. 34.]

*Copies of Ratings, etc., to be Sent to Licensee. Penalty for non-compliance with Order.*

SECT. 38. A certified copy of all ratings and conclusions of the inspectors in respect to any licensed theatre,

special hall or public hall shall be delivered or mailed by the licensing officer to the licensee at the building. If any inspector shall report that the laws or the conditions of the license are not complied with by any licensee, the licensing officer may notify the licensee, fixing a time within which he shall comply with the law and the conditions of the license. If at the expiration of such time there has not been such compliance, the licensing officer shall give a hearing to the licensee; and if upon investigation he shall find that there is cause, he shall revoke the license. The licensing officer may, if in his opinion the public safety requires it, order any theatre, special hall or public hall to be closed pending a hearing upon the revocation of the license, and any person failing to comply with such order shall be punished by a fine of not less than fifty nor more than one thousand dollars.

[1904, c. 450, Sect. 8; 1906, c. 105, Sect. 2; 1913, c. 665, Sect. 35.]

*Copy of Ratings, etc., May be Posted.*

SECT. 39. Any licensee may post upon his premises a certified copy of the complete table of ratings and conclusions relating to the theatre, special hall or public hall, covered by his license, but he shall not post an incomplete copy of such table.

[1904, c. 450, Sect. 9; 1931, c. 655, Sect. 36.]

*Penalty for False Statements, etc.*

SECT. 40. Any person having any duty to perform under this chapter in connection with the licensing or inspection of theatres, special halls or public halls who wilfully makes any false statement or report or any false record of any statement, report or rating as to any such theatre, special hall or public hall shall be punished by a fine of not more than one thousand dollars or by imprisonment for not more than one year.

[1904, c. 450, Sect. 13; 1913, c. 655, Sect. 37.]



*Penalty for Giving or Receiving Free Pass.*

SECT. 41. Any officer or person having any duty in any way connected with the inspection of theatres, special halls or public halls, who requests for himself or another or accepts or uses any ticket or pass or privilege of admission, or admission, to any theatre, special hall or public hall for which he is to pay or has paid either nothing or a price less than that demanded of the public generally, and any owner, proprietor, manager, lessee, agent or employee of any theatre, special hall or public hall, or any other person who issues, delivers, offers or allows any such ticket, pass, privilege or admission to any such officer or person, or to any other person, at the request, solicitation procurement or with the connivance of any such officer or person, shall be punished by a fine of not less than one hundred nor more than one thousand dollars.

[1904, c. 450, Sect. 14; 1913, c. 655, Sect. 38.]

*Watchmen in Hotels, etc.*

SECT. 44. The keeper of a hotel, boarding or lodging house or family hotel containing one hundred or more sleeping rooms, and being four or more stories high, shall have therein at least two competent watchmen, each properly assigned, and each on duty between the hours of nine o'clock at night and six o'clock in the morning. The keeper of every hotel, boarding or lodging house or family hotel containing fifty or more sleeping rooms, but less than one hundred, and being three stories high, shall have between said hours at least one competent watchman on duty thereon. In all such hotels, lodging houses or family hotels, the halls, corridors and stairways shall be properly lighted at night, and a red light shall be kept during the night at the top and bottom of each flight of stairs; and one or more proper alarms or gongs, capable

of being heard throughout the house, shall always remain easy of access and ready for use in every such building to give to the inmates warning of fire. The keeper of every such hotel, boarding or lodging house or family hotel shall keep a notice descriptive of such means of escape conspicuously posted in every sleeping room.

[1883, c. 251, Sect. 1; 1884, c. 223, Sect. 2; R. L. 104, Sect. 29; 1913, c. 655, Sect. 42.]

[For penalty, see Sect. 46.]

*Penalty for Hindering Inspector, etc.*

SECT. 50. Any person who hinders or prevents or attempts to prevent the commissioner of public safety, the chief of inspections of the department or any inspector from entering any building, structure or enclosure or part thereof in the performance of his duty in the enforcement of the laws of the commonwealth relating thereto shall be punished by a fine of not less than fifty nor more than one hundred dollars.

[1904, c. 450, Sect. 12; 1908, c. 389, Sect. 2; 1913, c. 655, Sect. 49.]

*Penalty for Unlicensed Use as Theatre, etc.*

SECT. 52. No person shall occupy or use any building or part thereof as a theatre, special hall, public hall, miscellaneous hall, place of assemblage or place of public resort until a license therefor has been issued by the commissioner of public safety or the mayor of Boston or a certificate therefor by an inspector or an inspector of the building department of Boston. The certificate of the inspector shall be conclusive evidence of a compliance with sections fifteen to sixty, inclusive, for such use of a hall as he shall set forth in detail in the certificate, and shall be conspicuously posted near the main entrance of the hall. Violation of this section or of the conditions of a license or certificate shall be punished by a fine of not less than twenty-five nor

more than one thousand dollars or by imprisonment for not more than one year, and the license or certificate may be revoked.

[1906, c. 105, Sect. 1; 1908, c. 335, Sects. 1, 2; 1910, c. 143; c. 284, Sect. 1; 1913, c. 655, Sects. 39, 51.]

### *General Penalty.*

SECT. 53. Whoever, being the owner, lessee or occupant of any building described in section twenty-one or part thereof, violates any provision of sections fifteen to fifty-two, inclusive, for which no other penalty is specifically prescribed shall be punished by a fine of not less than fifty nor more than five hundred dollars.

[1882, c. 266, Sect. 3; 1885, c. 326, Sect. 2; 1888, c. 426, Sect. 12; 1894, c. 382, Sect. 2; c. 481, Sects. 60, 62; R. L. 104, Sects. 55, 56; 1913, c. 655, Sect. 53; 230 Mass. 306.]

### *Enforcement.*

SECT. 54. Sections fifteen to fifty-two inclusive, shall, except when otherwise specifically provided, be enforced by the commissioner of public safety, the chief of inspections of the department and inspectors of the division of inspection of the department. The commissioner of public safety shall issue regulations necessary for their uniform enforcement. All sections of this chapter which apply to Boston shall be enforced by the building commissioner.

[1901, c. 166, Sect. 3; R. L. 104, Sect. 46; 1909, c. 514, Sect. 99; 1913, c. 610, Sect. 2; c. 655, Sect. 54.]

### *Appeal.*

SECT. 55. Any person aggrieved by an order, requirement or direction of an inspector under any of the preceding sections may, within thirty days after the service thereof, appeal to a judge of the superior court for the county in which the building to which such order, require-

ment or direction relates is situated for an order forbidding its enforcement; and after such notice as said court shall direct to all parties interested, a hearing may be had before the court at an early and convenient time and place fixed by it; or the court may appoint three disinterested persons, skilled in the subject matter of the controversy, to examine the matter and hear the parties; and the decision of said court, or the written decision under oath of a majority of said experts, filed in the office of the clerk of courts in said county within ten days after such hearing, may alter, annul or affirm such order, requirement or direction. Such decision or a certified copy thereof shall have the same authority, force and effect as the original order, requirement or direction of the inspector. If such decision annuls or alters the order, requirement or direction of the inspector, the court shall order the inspector not to enforce his order, requirement or direction, and in every case the certificate required by law shall thereupon be issued by said court or by said experts.

[1890, c. 438, Sect. 1; 1894, c. 481, Sect. 5; R. L. 104; Sect. 19; 1908, c. 487, Sect. 1; 1913, c. 655, Sect. 55; 1917, c. 156, Sect. 2; 228 Mass. 368.]

#### *Fees for Experts.*

SECT. 56. The court may award reasonable compensation to such experts, to be paid by the county in which the application for an order of the court was made, if the order, requirement or direction of the inspector is altered or annulled, otherwise by the applicant. If the order, requirement or direction of the inspector is affirmed by the court or the experts, costs shall be taxed against the applicant as in civil cases, and shall be paid into the treasury of the said county.

[1890, c. 438, Sects. 2, 3; 1894, c. 481, Sects. 6, 7; R. L. 104, Sects. 20, 21; 1908, c. 487, Sect. 2; 1913, c. 655, Sect. 56.]

*Restraining Illegal Erection.*

SECT. 57. The supreme judicial or superior court may, upon the petition of an inspector, or in Boston the building commissioner, temporarily or permanently restrain the erection, construction, alteration, use or occupation of a building, in violation of any provision of sections fifteen to fifty-two, inclusive.

[1888, c. 316, Sect. 2; c. 426, Sect. 12; 1893, c. 199, Sect. 2; 1894, c. 382, Sect. 2; c. 481, Sects. 26, 38; R. L. 104, Sects. 51, 53, 1913, c. 655, Sects. 52, 57.]

*Concurrent Jurisdiction of Inferior Courts.*

SECT. 58. District courts shall have jurisdiction concurrently with the superior court of prosecutions and proceedings at law under sections three to fifty-two, inclusive.

[1906, c. 105, Sect. 6; 1908, c. 335, Sect. 3; c. 388, Sect. 3; 1913, c. 655, Sect. 58.]

*Enforcement of Inspector's Orders.*

SECT. 59. The supreme judicial or superior court may, upon the application of the commissioner of public safety, the chief of inspections of the department or any inspector, or in Boston of the building commissioner, enforce, by any suitable process or decree, any provision of sections fifteen to fifty-two, inclusive, and any order or requirement of any person made under authority thereof.

[1904, c. 450, Sect. 11; 1913, c. 655, Sect. 59.]

*Restraining Illegal Use, etc., of Buildings.*

SECT. 60. The supreme judicial or superior court may restrain the illegal-placing, maintenance or use of any building, structure, or other thing. It may upon the petition of a city or town for such relief, require the removal of any such building, structure or other thing by the owner, and may authorize the city or town, in default of such removal

by the owner, to remove it at his expense. Upon such petition, the defendant shall be presumed to have acted without a license or authority until he proves the contrary.

[1899, c. 326; R. L. 104, Sect. 52; 1913, c. 655 Sect. 60.]

*Notice to Assessors of Permits for Buildings.*

SECT. 61. The inspector of buildings in every city and town having such an officer shall give written notice to the assessors thereof of the granting by him of permits for the construction of any building therein or for any substantial alteration therein or addition thereto. Such notice shall be given within seven days after the granting of each permit and shall state the name of the person to whom the permit was granted and the location of the building to be constructed or altered or to which an addition is to be made.

[1913, c. 676, Sect. 1.]

## ELEVATORS.

*Installation and Inspection.*

SECT. 62. In cities and towns not having a building department or an inspector of buildings, the installation and alteration of all elevators shall be under the supervision of the inspectors of the division of inspections of the department. In cities and towns having an inspector of buildings or a person acting as such, the installation and alteration of all elevators shall be under his supervision. No elevator shall be installed or altered until a copy of the plans and specifications of such elevator or of the proposed alterations shall have been filed by the owner of the premises where the elevator is to be installed or altered, or by the manufacturer of the elevator, with the inspector or building inspector having jurisdiction and a certificate of approval or a specification of requirements shall have been issued by him. The inspector and inspectors of buildings or departments of buildings

of cities and towns shall enforce the regulations made by the board of elevator regulations as hereafter provided.

[1901, c. 439; R. L. 104, s. 27; 1913, c. 806, sects. 1, 7.]

[For penalty, see Sect. 71.]

#### *Test of Safety Devices.*

SECT. 63. On completion of the work of installation or alteration, the manufacturer of the elevator or the persons making the alterations shall make a practical test of the safety devices of the elevator in the presence of the inspector having jurisdiction thereof; and if the test is satisfactory to him, he shall issue a certificate approving the elevator and safety devices thereof.

[1913, c. 806, Sect. 2.]

#### *Report of Inspection.*

SECT. 64. All elevators shall be thoroughly inspected and a practical test made of the safety devices required therefor at intervals of not more than one year, and at such other times as may be deemed necessary by the inspector having jurisdiction thereof. Within ten days after the inspection, he shall report the result thereof to the commissioner of public safety, upon forms to be furnished by him. This requirement for the making of inspection reports shall not apply to the city of Boston.

[1913, c. 806, Sect. 3.]

#### *Certificate of Inspection to be Posted in Elevator.*

SECT. 65. If in the judgment of any inspector having jurisdiction thereof an elevator is safe, and if the elevator has been constructed in the manner required by law or by the regulations of the board of elevator regulations, the inspector shall issue a certificate to that effect to the owner of the elevator or to the person in charge thereof, who shall post the certificate in a conspicuous

place in or near the cab or car of such elevator. Otherwise, the inspector shall immediately post conspicuously upon the entrance or door of the cab or car of such elevator, or upon the elevator, a notice of its dangerous condition, and shall prohibit the use of the elevator until it has been made safe to his satisfaction. No person shall remove such notice or operate such elevator until the inspector has issued his certificate as aforesaid.

[1883, c. 173; 1894, c. 481, Sect. 43; R. L. 104, Sect. 28; 1911, c. 455; 1913, c. 806, Sect. 4; 227 Mass. 415.]

[For penalty, see Sect. 71.]

*Report of Accidents and Defective Elevators.*

SECT. 66. Any owner, operator or person in charge of an elevator or any person employed to inspect an elevator shall, if he thinks such elevator is unsafe, make a written report thereof to the inspector having jurisdiction thereof, who shall forthwith inspect such elevator. If any accident occurs to an elevator, the operator, person in charge or owner having knowledge thereof shall immediately report such accident to the inspector having jurisdiction, who shall forthwith inspect such elevator.

[1913, c. 806, Sect. 5.]

[For penalty, see Sect. 71.]

*Petition for Changes in Regulations.*

SECT. 67. Any person engaged in the inspection, alteration, construction, repair or operation of elevators may from time to time, by written petition to the commissioner of public safety, request that rules and regulations established by a board of elevator regulations heretofore or hereafter appointed be altered or amended. The commissioner may grant public hearings upon such petition, and if he deems it advisable may appoint a new board of elevator regulations as provided in section ten of chapter twenty-two.

[1913, c. 806, Sect. 9; 1919, c. 350, Sect. 106.]



*Board to Amend Regulations.*

SECT. 68. The board of elevator regulations shall frame amendments to the regulations relating to the construction, installation, alteration and operation of all elevators, and relative to the location, design and construction of shafts or enclosures for elevators, safety devices, gates and other safeguards, protection against the elevator or hoisting machinery, and means to prevent the spread of fire, and also amendments to the regulations designed to make uniform the work of the inspectors of the division of inspections of the department and of inspectors of buildings throughout the commonwealth.

[1913 c. 806, Sect. 6.]

*Establishment of Regulations.*

SECT. 69. The board of elevator regulations shall, within three months after its members are appointed, draft amendments to the regulations and submit the same to the governor and council for their approval. Within sixty days after such submission they shall approve the same, with such alterations and amendments and after such public hearings as they may deem proper; and the regulations so altered and amended shall become part of the rules and regulations pertaining to elevators. The commissioner of public safety shall furnish upon application a printed copy of the regulations to all manufacturers of elevators operating in the commonwealth, to all inspectors of buildings in the cities and towns of the commonwealth, and to all others who are concerned. The board shall be dissolved upon the approval of the regulations by the governor and council.

[1913, c. 806, Sects. 7, 8; 1919, c. 350, Sects. 99, 106.]

*Appeal.*

SECT. 70. Whoever, except in Boston, is aggrieved by the order, requirement or direction of an inspector of

buildings of a city or town in reference to the installation or alteration of elevators may, within ten days after the service thereof, appeal as provided in section fifty-five; and all the provisions of said section, except as otherwise provided herein, shall apply to the procedure on such appeal. In Boston the right of appeal shall be the same as provided by section seven of chapter five hundred and fifty of the Acts of nineteen hundred and seven.

[1913, c. 806, Sect. 11.]

*Penalty.*

SECT. 71. Any person violating or failing to comply with any provision of sections sixty-two to seventy, inclusive, or of any regulation established thereunder shall be punished by a fine of not more than five hundred dollars.

[1913, c. 806, Sect. 12.]

CINEMATOGRAPHS.

*Regulation.*

SECT. 72. No cinematograph or similar apparatus involving the use of a combustible film more than ten inches in length, except one using only an enclosed incandescent lamp and cellulose acetate films not more than one and one quarter inches in width, shall, except as provided by section eighty-five, be kept or used for the purpose of exhibiting such films in or upon the premises of a public building until such cinematograph or similar apparatus has been inspected and approved by an inspector, who shall have placed thereon a numbered metal tag; nor until a booth or enclosure, which has been inspected and approved by such an inspector and his certificate issued therefor, has been provided for said apparatus; nor until such precautions against fire as the commissioner of public safety may specify have been taken by the owner, user or exhibitor; provided, that no such apparatus

shall be operated with oxyhydrogen gas, so-called, or with limelight. In addition, in Boston the location of any booth or enclosure surrounding such apparatus shall be approved by the building commissioner, who may order such additional precautions against fire as he may deem necessary.

[1905, c. 176, Sect. 1; 1908, c. 566, Sect. 1; 1914, c. 791, Sect. 1; 1915, c. 169, Sect. 1.]

#### *Permits for Special Exhibitions.*

SECT. 82. Except in Boston, the commissioner of public safety may grant permits for the special exhibition of pictures by the use of a cinematograph or similar apparatus in a public building which in his opinion is in safe condition for such exhibitions, and he may prescribe such regulations as he may deem necessary for the presentation of the same. Two dollars shall accompany the application for each permit.

[1911, c. 440; 1914, c. 791, Sect. 12.]

#### *Application of Certain Sections.*

SECT. 83. Sections seventy-two to seventy-six, inclusive, shall not apply to any motion picture machine operated with only cellulose acetate films not more than one inch and one fourth in width and requiring not more than five hundred watts of electric current to operate the arc: provided, that such machines shall not be kept or used in a public building except under such regulations as the commissioner of public safety shall prescribe.

[1914, c. 791, Sect. 13.]

#### *Penalty.*

SECT. 84. Any person keeping or using a cinematograph or similar apparatus contrary to any provision of sections seventy-two to eighty-four, inclusive, or in violation of any rule or regulation made by the commissioner

of public safety, or, in Boston, in violation of any regulation or requirement made by the building commissioner in accordance with said sections, shall be punished by a fine of not less than fifty nor more than five hundred dollars.

[1905, c. 176, Sect. 3; 1908, c. 566, Sect. 3; 1914, c. 791, Sect. 15.]

*Special Licenses for Operators in Churches, Schools, Etc.*

SECT. 85. Notwithstanding any provision of sections seventy-two to eighty-four, inclusive, the commissioner of public safety may grant special licenses for operator of motion picture machines in churches, schoolhouses or public institutions in cities and towns, except Boston, which in his opinion are in safe condition for said exhibitions, and he may prescribe regulations for the proper conduct of the same. Two dollars shall accompany each application for such special license.

[1911, c. 440, Sects. 1, 2, 3; 1914, c. 791, Sect. 17.]

---

GENERAL LAWS, CHAPTER 148.

FIRE PREVENTION.

*Application of Certain Sections.*

SECTION 2. Sections six, ten, thirteen, fourteen, nineteen, twenty and twenty-two, except as otherwise provided in section thirty, shall not apply to the metropolitan district. Sections twenty-eight to fifty-one, inclusive, shall apply only to the said district.

[1914, c. 795, Sect. 28; 1920, c. 436, Sect. 2.]

[1921, c. 485.]

*Delegation of Powers.*

SECT. 31. The marshal may delegate the granting and issuing of any licenses or permits authorized by sections thirty to fifty-one, inclusive, or the carrying out of any lawful rule, order or regulation of the department, or

any inspection required under said sections, to the head of the fire department or to any other designated officer in any city or town in the metropolitan district. Except as otherwise provided a fee of fifty cents may be charged for any such permit. Any such permit may be revoked by the marshal or by any officer designated to grant it.

[1914, c. 795, Sect. 4.]

[1921, c. 485.]

*Paint or Inflammable Fluids.*

SECT. 32. No paint, oil, benzine, naphtha or other inflammable fluid shall be kept or stored in bulk or barrel otherwise than in the tank of an automobile, motor boat or stationary engine, in total quantity exceeding ten gallons, in any part of any building used for habitation, or within fifty feet of any building used for dwelling purposes, unless such paint, oil or other inflammable fluid is inclosed within a fireproof room or structure, constructed and arranged to the satisfaction of the marshal; and no paint, oil, benzine, naphtha or other inflammable fluid, except for domestic purposes, shall be kept, used, stored or sold in any part of any building used for habitation unless a permit therefor has first been obtained from the marshal under such terms and conditions as he may prescribe.

[1914, c. 795, Sect. 6; 4 Op. A. G. 397.]

[For penalty, see Sect. 51.]

*Combustible Material.*

SECT. 33. No part of any building used for habitation, nor that part of any lot within fifty feet of any building so used, shall be used for the storage, keeping or handling of any combustible article for other than domestic purposes, or of any article or material that may be dangerous to the public safety as a fire menace, unless a permit has first been obtained therefor from the marshal. No part of any such building, shall be used as a carpenter's shop

nor for the storage, keeping or handling of feed, hay, straw, excelsior, shavings, sawdust, cotton, paper stock, feathers or rags, except under such terms and conditions as the marshal may prescribe.

[1914, c. 795, Sect. 7.]

[For penalty, see Sect. 51.]

*Removal of Combustible Refuse.*

SECT. 34. The marshal or such person as he may designate may require the removal and destruction of any heap or collection of refuse or debris that in his opinion may become dangerous as a fire menace.

Neglect on the part of either the owner or occupant, or both, to remove the cause of complaint under this or the preceding section, after notice thereof has been served, shall be deemed a refusal; and the marshal or the person whom he may designate may enter upon the premises and remove such material or article and the containers thereof as may be covered by or mentioned in the notice issued. The material or articles removed, if of no substantial value, shall be destroyed; otherwise they shall be placed in storage, and the total costs attending such action shall be paid by the owner or occupant.

[1914, c. 795, Sect. 8.]

[For penalty, see Sect. 51.]

*Use of Salamanders.*

SECT. 35. No salamander or stove for drying plaster shall be used in any building except under such conditions as may be prescribed by the marshal; and no such salamander or stove shall be set upon a wooden floor unless it is raised above the floor at least four inches and set upon brick or other incombustible material in a bed of sand at least two inches thick, spread upon the floor and covering an area of at least two feet in all directions larger than the area of the salamander or stove.

[1914, c. 795, Sect. 9.]

[For penalty, see Sect. 51.]

*Automatic Sprinklers.*

SECT. 36. Any building used in whole or in part for the business of woodworking, or for the business of manufacturing or working upon wooden, basket, rattan or cane goods or articles, or tow, shavings, excelsior, oakum, rope, twine, string, thread, bagging, paper, paper stock, cardboard, rags, cotton or linen, or cotton or linen garments or goods, or rubber, feathers, paint, grease, soap, oil, varnish, petroleum, gasoline, kerosene, benzine, naphtha or other inflammable fluids, and any building used in whole or in part for the business of keeping or storing any such goods or articles, except in such small quantities as are usual for domestic use or for use in connection with and as incident to some business other than such keeping or storing, shall, upon the order of the marshal, be equipped with automatic sprinklers; provided, that no such order shall apply to any building unless four or more persons live or are usually employed therein above the second floor.

[1914, c. 795, Sect. 10; 4 Op. A. G. 585.]

[For penalty, see Sect. 51.]

*Dry Pipes in Basement*

SECT. 37. The basements of any buildings shall, upon written notice by the marshal to the owners of the buildings, be equipped with such dry pipes with outside connections as he may prescribe.

[1914, c. 795, Sect. 11.]

[For penalty, see Sect. 51.]

*Penalty.*

SECT. 38. Owners of buildings who, within six months after having received written notice from the marshal under section thirty-six or thirty-seven, fail to comply with the requirement of such notice shall be punished by a fine of not more than one thousand dollars.

[1914, c. 795, Sect. 12.]

*Rules as to Fires and Fire Protection.*

SECT. 39. In addition to the powers given by sections thirty to thirty-eight, inclusive, the marshal may make orders and rules relating to fires, fire protection and fire hazard binding throughout the metropolitan district, or part thereof, or binding upon any person or class of persons within said district, limited, however, to the following subjects:

A. Requiring the keeping of portable fire extinguishers, buckets of water or other portable fire extinguishing devices on any premises by the occupant thereof, and prescribing the number and situation of such devices.

B. Prohibiting or regulating the accumulation and requiring the removal of combustible rubbish, including waste paper, cardboard, string, packing material, sawdust, shavings, sticks, rags, waste leather and rubber, boxes, barrels, broken furniture and other similar light or combustible refuse.

D. Causing obstacles that may interfere with the means of exit to be removed from floors, halls, stairways and fire escapes.

E. Ordering the remedying of any condition found to exist in or about any building or other premises or any ship or vessel in violation of any law, ordinance, by-law, rule or order in respect to fires and the prevention of fire.

H. Requiring the cleaning of chimney flues and vent pipes.

I. Requiring proper safeguards to be placed and maintained about or over roof skylights.

K. Requiring that all signs and advertising devices erected on buildings shall be approved by said marshal.

M. Defining the classes of buildings to be equipped with sprinkler protection as provided by section thirty-six.

[1914, c. 795, Sect. 13; Op. A. G. 580.]



*Orders to Occupant or Owner.*

SECT. 41. If buildings or other premises are owned by one person and occupied by another under lease or otherwise, the orders of the marshal shall apply to the occupant alone, except where the rules or orders require the making of additions to or changes in the premises themselves, such as would immediately become real estate and be the property of the owner of the premises. In such cases the rules or orders shall affect the owner and not the occupant; and unless it is otherwise agreed between the owner and the occupant, the occupant whose use of the premises has caused the making of such additions or changes, in addition to his rent or other payments, shall, after the additions or changes are made, pay a reasonable per cent of the cost thereof annually to the owner of the premises. No rule or order shall be made or enforced which requires an expenditure by the owner or occupant of more than five per cent of the last annual assessed valuation of the land and buildings to which such rule or order relates.

[1914, c. 795, Sect. 22; 4 Op. A. G. 572.]

*Appeals.*

SECT. 45. The marshal shall hear and determine all appeals from the acts and decisions of the heads of fire departments and other persons acting or purporting to act under his authority, done or made or purporting to be done or made under the provisions of sections thirty to fifty-one, inclusive, and shall make all necessary and proper orders thereon. Any person aggrieved by any such action of the head of a fire department or other person may appeal to the marshal.

[1914, c. 795, Sect. 18.]

*Tanks for Storage of Fluid.*

SECT. 54. No person shall construct, maintain or use any tank or container of more than ten thousand gallons

capacity, unless constructed principally of wood, for the storage of any fluid other than water, unless the same is underground, without first securing a permit therefor from the commissioner. Whoever violates this section or a rule or regulation made under the following section shall be punished by a fine of not less than fifty nor more than one thousand dollars.

[1919, c. 303, Sects. 1, 3.]

[1921, c. 104.]

*Rules and Regulations.*

SECT. 55. The department shall make rules and regulations governing the construction, use and maintenance of tanks to which the preceding section applies. Such rules and regulations shall not take effect until approved by the governor and council, and filed in the office of the state secretary.

[1919, c. 303, Sect 2.]

Department of Public Safety may make rules for keeping, storage or use of crude petroleum or any of its products. [See Sects. 10-11 Chapter 148, General Laws.]

---

GENERAL LAWS, CHAPTER 149, SECTION 126.

DOORS NOT TO BE LOCKED DURING WORKING HOURS IN  
OPERATIVE BUILDINGS.

SECTION 126. No outside or inside doors of any building where operatives are employed shall be so locked, bolted or otherwise fastened during the hours of labor as to prevent free egress. Any person having charge of a building or room therein any exit door of which shall be found locked, bolted or otherwise fastened contrary to this section shall be punished by a fine of not less than twenty-five nor more than five hundred dollars or by imprisonment for not more than one year, or both.

[1884, c. 52, Sects, 1, 2; 1894, c. 481, Sects. 53, 54; R. L. 104, Sect. 40; 1909, c. 514, Sects. 93, 145; 1914, c. 566.]

## GENERAL LAWS, CHAPTER 184.

## GENERAL PROVISIONS RELATIVE TO REAL PROPERTY.

*Proceedings Affecting Title to Realty Binding on Third Parties, When.*

SECTION 15. A writ of entry or other proceeding, either at law or in equity, which affects the title to real property or the use and occupation thereof or the buildings thereon, shall not have any effect except against the parties thereto, their heirs and devisees and persons having actual notice thereof, until a memorandum containing the names of the parties to such proceeding, the court in which it is pending, the date of the writ or other commencement thereof, the name of the town where the real property liable to be affected thereby lies and a description of such real property sufficiently accurate for identification is recorded in the registry of deeds for the county or district where such real property lies; but this section shall not apply to attachments, levies of execution or proceedings in the probate courts.

[1877, c. 229, Sects. 1, 3; P. S. c. 126, Sect. 13; 1897, c. 463; R. L. 134 Sect. 12.]

## GENERAL LAWS, CHAPTER 272.

## STABLES — EXITS.

SECTION 86. No person shall stable a horse or mule on the second or any higher floor of any building, unless there are two means of exit therefrom, at opposite ends of the building, to the main or street floor, unless such building is equipped with an automatic sprinkler system. This section shall not apply to cities.

SECT. 86A. No person shall stable a horse or mule above the first or ground floor of any building not equipped with an automatic sprinkler system, or horses or mules

exceeding six in all on the first or ground floor of any building not so equipped, unless there are two unobstructed means of exit from each floor whereon it or they are stabled, as far apart as practicable and so constructed as to grade that the said animal or animals can quickly and safely leave the building in case of fire and approved as to situation, arrangement and utility by the chief of the fire department. The person in charge of horses and mules stabled in any building not equipped with such a system and requiring two exits as aforesaid shall cause each such animal to use each such exit at least once a week. This and the four following sections shall apply only to cities.

SECT. 86B. No person shall stable horses or mules exceeding fifteen in all at any one time in a building not equipped with an automatic sprinkler system unless a watchman is employed constantly on the premises to guard against fire.

SECT. 86C. No person shall have a lighted cigarette, cigar or pipe in his possession in any building in which by the provisions of section eighty-sixA two unobstructed means of exit are required or in which by the provisions of section eighty-sixB the employment of a watchman is required, except in a room in said building made fire-resisting.

SECT. 86D. On every floor of a building not equipped with an automatic sprinkler system, where horses or mules are stabled, there shall be kept in accessible locations and filled at all times, four pails of water and one pail of sand, for each one thousand square feet of floor space, to be used for no other purpose than extinguishing fires and to be so marked.

SECT. 86E. In the metropolitan fire prevention district the state fire marshal or any person designated by him, and in cities outside said district, the chief of the fire department or any person designated by him, may, at

all reasonable hours, enter into buildings within their jurisdiction where horses or mules are stabled, or upon premises adjacent thereto, for the purpose of enforcing sections eighty-sixA to eighty-sixD, inclusive, and if any such official or person so authorized finds the existence of conditions likely to cause a fire in such buildings or on such premises, he shall order such conditions to be remedied. Such order shall be served by delivering the same in hand or by posting the same in a conspicuous place on the building or premises affected thereby.

SECT. 86F. Whoever violates any provision of sections eighty-six to eighty-sixD, inclusive, shall be punished by a fine of not more than two hundred dollars or by imprisonment for not more than one month, or both. Whoever refuses or unreasonably neglects to comply with any order issued under section eighty-sixE shall be punished by a fine of not more than ten dollars for each day during which such refusal or neglect continues after service of such order.

[1916, c. 158, Sects. 1-3; 1924, c. 478, Sects. 1 and 2.]

---

## REVISED ORDINANCES 1914, CHAPTER 8.

### BUILDING DEPARTMENT.

SECTION 1. The building department shall be under the charge of the building commissioner who shall exercise the powers and perform the duties provided by statute, and may appoint not exceeding thirty building inspectors for duty in his department.

[St. 1907, c. 550; St. 1914, c. 782 and c. 795.]

### BOARD OF APPEAL.

SECT. 2. There shall be in the building department a board of appeal consisting of five members, who shall exercise the powers and perform the duties provided by statute.

[St. 1907, c. 550, Sects. 6 and 7.]

## BOARD OF EXAMINERS.

SECT. 3. There shall be in the building department a board of examiners, consisting of three members, who shall exercise the powers and perform the duties hereinafter provided. Each member shall receive ten dollars for every day or part thereof of actual service but not more than one thousand dollars in any year.

*Examinations.*

SECT. 4. The board shall hold examinations, under reasonable rules and regulations adopted by it, of persons desiring to be registered as qualified to have charge or control of the construction, alteration, removal, or tearing down of buildings or structures. Due notice of such examinations shall be posted in the offices of the building department and of the board of examiners and published in the City Record.

*Registration.*

The board shall establish various classes of persons to be registered, shall determine the qualifications required for each class, and after examination shall register in each class the persons found to possess the requisite qualifications therefor. The name and address of each person so found to be qualified, with the designation of the class in which he is registered, shall thereupon be certified by the board to the building commissioner who shall make a record of the same which shall be open to public inspection.

*Qualifications of Persons in Control of Building Operations.*

SECT. 5. All work of construction, alteration, removal or tearing down of buildings or structures in the city of Boston shall, hereafter, be under the charge, control and personal supervision of a licensed mechanic, qualified by education, training or experience for the performance of that duty in a manner which shall preserve public safety and conform to the laws, ordinances, rules and regulations

relating to the construction, alteration, removal or tearing down of buildings and structures in the city of Boston.

[R. O. 1914, c. 8; Ord. 1920, c. 10; Ord. 1921.]

*Permits to Persons Licensed.*

SECT. 6. The qualifications of such persons shall be determined by the board of examiners, and no permit for the doing of work described in section five of this chapter shall be issued by the building commissioner unless the application for a permit therefor contains the name, address and signature of a person who is duly licensed, as herein provided, to take personal charge or control of such work; provided, however, that a permit may be granted if no person licensed as aforesaid has been named in the application therefor whenever the work in question is of minor importance, and, in the opinion of the building commissioner, stated in writing with his reasons therefor upon the application for such permit, the work is of such simple character that its execution will not endanger the safety of the public, or of any person engaged thereon.

*Exemption from Examination.*

SECT. 7. Any person who shall by affidavit, together with such other evidence as may be required by the board, show to the board that he has had charge or control of the construction, alteration, removal or tearing down of buildings or structures in the class in which he applies to be registered, and shall satisfy the board that he is qualified by education, training or experience to have charge or control of such work, may, without any other examination, be registered in such class and be certified to the building commissioner as a person qualified within such class.

*Fees for Building Licenses.*

SECT. 8. The board shall issue a license to each person so certified by the board to the building commissioner.

All licenses hereafter issued, or issued less than one year prior to the passage of this ordinance shall expire in one year from the date of issuance; and all licenses issued more than one year prior to the passage of this ordinance shall expire on the date in the year 1921 corresponding to the date in the year of issuance. The board may renew a license upon any expiration thereof, for the further period of one year from the date of renewal, with or without re-examination, as the board may determine. The fees to be paid to the board for such licenses and renewals shall be as follows: new license — five (5) dollars; and each yearly renewal thereof two (2) dollars. The first renewal of a license heretofore granted — five dollars and each yearly renewal thereof two (2) dollars. Special license — one (1) dollar. The fees received by the board shall be paid to the city collector at least once a week.

*Revocation of License.*

SECT. 9. A person who has been duly licensed as aforesaid shall be entitled to have charge or control of any work described in section five of this chapter, in the class in which he is registered, until his license is revoked or suspended by the building commissioner upon the order of the board. No license shall be revoked or suspended except upon proof of charges, filed with the board by the building commissioner or other person, specifying that the licensee has been careless or negligent in the performance of his duty in connection with work under his charge or control, or has caused or permitted a violation of the building laws in connection therewith, or that such laws have been violated in connection with such work when the licensee knew, or, in the exercise of due diligence, should have known, that such violation had occurred. Upon learning of such carelessness, or neglect of duty, or of such violation of law, the building commissioner shall



file charges with the board and prosecute the same. Upon the filing of such charges by the building commissioner or other person, the board shall give to the licensee notice of a hearing upon the charges which shall be held by the board not less than seven days after the date of said notice. The notice shall be by personal service or by registered mail, and shall state the time and place of the hearing and contain a copy of the charges. At such hearing the licensee may be represented by counsel, and the building commissioner may be assisted by a representative of the law department of the city.

*Stopping Work.*

SECT. 10. If, for any cause, a person licensed as herein provided shall cease to have charge or control of any work described in section five of this chapter before such work is finished, the work shall stop until another person duly licensed for the doing of such work has been placed in charge thereof.

*Penalty.*

SECT. 11. Whoever violates any provision of sections five, eight or ten of this chapter shall be punished by a fine of not more than fifty dollars for each offence.

[1920 Ord. amending Sect. 8. Ordained by authority of c. 713 Acts of 1912.]

---

CHAPTER 41, REVISED ORDINANCES OF 1914.

BUILDING LIMITS.

*In the Year One Thousand Nine Hundred and Thirteen.  
Be it ordained by the City Council of Boston, as follows:*

SECTION 1. The building limits referred to in section nine of chapter five hundred and fifty of the acts of the year 1907 are hereby extended, defined and established as follows:

All that portion of the city which is included within a line beginning at the intersection of the boundary lines between the City of Boston and the cities of Somerville and Everett; thence by the boundary lines between the City of Boston and the cities of Everett and Chelsea to the intersection with the centre line of Trumbull street extended northerly; thence by said centre line of Trumbull street extended, the centre line of Trumbull street and said centre line extended southerly to the Harbor line; thence by said Harbor line to its intersection with the easterly line of Pier No. 5 belonging to the Boston and Albany Railroad Company; thence by a straight line across Boston Harbor to its intersection with the Harbor line at the easterly corner of Pier No. 1 in South Boston; thence by the Harbor line in the northerly, easterly and southerly portions of South Boston to an angle in said Harbor line nearly opposite the intersection of the centre line of Columbia road with the centre line of location of the Old Colony Railroad; thence by a straight line to the said intersection; and by the centre lines of Columbia road, Blue Hill avenue, Seaver street, Columbus avenue, Atherton and Mozart streets, Chestnut avenue, Sheridan, Centre and Perkins streets, South Huntington avenue, Castleton street and the centre line of said Castleton street extended to the boundary line between the City of Boston and the town of Brookline; thence by said boundary line to a point therein one hundred feet southwest of Washington street in the Brighton district; thence by a line parallel to and one hundred feet southwesterly from the centre line of Washington street to an angle formed by the intersection of said line with the extension of a line parallel to and one hundred feet northwesterly of the centre line of Market street; thence by said extension and said line

parallel to and one hundred feet northwesterly of the centre line of Market street to a point one hundred feet south of the centre line of Western avenue; thence by a line parallel to and one hundred feet south of the centre line of Western avenue and said line extended to a point in the boundary line between the City of Boston and the town of Watertown south of Watertown Bridge, so called; thence by said boundary line and the boundary lines between the cities of Cambridge and Somerville to the point of beginning.

Also those portions of Ward 26 upon or within one hundred feet of the following named street and square: Everett square, so called; Fairmount avenue from River street to the Neponset River; River street from the location of the Boston & Providence Railroad to Winthrop street; Hyde Park avenue on the easterly side from the northerly side of Oak street to Everett street; Hyde Park avenue on the westerly side from the northerly side of Pine street extension, so called, to a point on said Hyde Park avenue opposite the southerly line of Everett street; Harvard avenue from River street to Winthrop street; Maple street from River street to a point one hundred and eighty feet southerly therefrom; Central avenue from River street to Winthrop street; Davison street from Fairmount avenue to a point three hundred feet northeasterly therefrom; Grove street; Pierce street from Fairmount avenue to a point three hundred feet northeasterly therefrom; Knott street from Fairmount avenue to a point three hundred feet easterly therefrom; Railroad avenue from Fairmount avenue to a point three hundred feet northeasterly therefrom; Station street from the Neponset river to a point three hundred feet northeasterly from Fairmount avenue; Walnut street from Fairmount avenue to a point three hundred

feet southwesterly therefrom; Maple street from Fairmount avenue to a point one hundred and twenty-five feet westerly therefrom.

This ordinance became operative July 1, 1914.

[1907, c. 550, Sect. 9; 1914, c. 782, Sect. 1; Ord. 1914, c. 4, Sect. 1.]

---

CHAPTER 5, ORDINANCES OF 1922 (AS AMENDED BY ORDINANCES OF 1923, CHAPTERS 2, 8 AND 12, AND ORDINANCE OF 1924).

CONCERNING PARK FRONTAGES IN THE CITY OF BOSTON.

*Be it ordained by the City Council of Boston, as follows:*

SECTION 1. No building or structure or any part thereof hereafter erected or altered on land which abuts on and has an entrance into and is within a distance of one hundred feet from the following parkways: The Fens (excepting Charlesgate East and Charlesgate West from a point one hundred feet north from their intersection with Commonwealth avenue to Charles river); Riverway, including Audubon road, from Brookline avenue to Beacon street; Commonwealth avenue, from Arlington street to a line drawn parallel to one hundred and thirty feet west of Charlesgate West; and from Washington street to Newton line; Jamaicaway; Olmsted Park; Arborway; Columbia road on the southerly side from Sumner street to Dorchester avenue and from Buttonwood street to Marine Park, and on the northerly side from Boston street to Marine Park, South Boston; shall be used for a livery or public stable or public garage, or for any mechanical, mercantile or manufacturing purposes, nor excepting churches and chapels, shall the extreme height of said buildings or structures exceed seventy feet from the mean grade of the edgestone or sidewalk on the front facing said parkway, exclusive of such steeples, towers,

domes, cornices, parapets, balustrades, sculptured ornaments, chimneys and roofs as the board of park commissioners shall approve; and no roof on any of the aforementioned buildings shall be used for laundry or clothes-drying purposes.

SECTION 2. No building or structure shall hereafter be erected or altered within a distance of one hundred feet from park or parkway in the city of Boston, without permission in writing having first been obtained from the Park Commissioners of the City of Boston.

SECTION 5. No building shall be erected or placed upon premises within the following distances from the following parks and parkways: Riverway, from Fenway to Huntington avenue, twenty feet; Jamaica way, from Huntington avenue to Perkins street, twenty feet; Jamaica way, from Perkins street to Prince street, twenty-five feet; Arborway, from Prince street to Franklin Park, twenty-five feet; Olmsted Park along the northwesterly boundary from Chestnut street to Francis Parkman Drive, twenty feet; Audubon road on the Riverway, from Brookline avenue to Boston and Albany Railroad, twenty feet; Audubon road on the Riverway, from Boston and Albany Railroad to Beacon street, fifteen feet; Commonwealth avenue from Arlington street to Beacon street, twenty feet; the Fens, twenty feet (excepting Charlesgate East from Boylston street to the Charles river, and Charlesgate West from Boston and Albany Railroad to the Charles river, and Boylston street, south side from Hemenway street to Fenway); Charlesgate East from Boylston street to Ipswich street, ten feet; and Boylston street, south side, from Hemenway street to Fenway, fifteen feet; provided that steps, windows, porticos and other usual projections appurtenant to the front wall of a building shall be

allowed where there is a reserved space; that no projections in the nature of a bay window, corner bay, circular front, or, octagon front, with the foundation wall sustaining the same (such foundation wall being a projection of the front wall), shall be allowed (excepting oriel windows above the first story on a street corner), unless any horizontal sections of such projections would fall within the external lines of trapezoids, the sum of whose bases upon the rear line of the aforesaid space does not exceed seven tenths of the whole front of the building, and the base of any one of which trapezoids does not exceed eighteen feet, and whose side lines make an angle of forty-five degrees with the base; and each house in a block shall be considered a separate building within the meaning of this section.

SECTION 6. No building shall be erected or placed upon premises within twenty feet from the exterior line of parks and parkways, on the Dorchesterway and Strandway, provided that steps, windows, porticos and other usual projections appurtenant to the front wall of a building are to be allowed in this reserved space of twenty feet, subject to the following limitations, viz.: *First*, that no projections of any kind (other than door-steps and balustrades connected therewith, and also piazzas projecting not more than eight feet) shall extend more than five feet from the rear line of the aforesaid space; *Second*, that no projections in the nature of a bay-window, corner-bay, circular front, or octagon front, with the foundation wall sustaining the same (such foundation wall being a projection of the front wall), will be allowed (excepting oriel windows above the first story on a street corner), unless any horizontal sections of such projections would fall within the external lines of trapezoids, the sum of whose bases

upon the rear lines of the aforesaid space does not exceed seven tenths of the whole front of the building, and the base of any one of which trapezoids does not exceed eighteen feet, and whole side lines make an angle of forty-five degrees with the base; and each house in a block shall be considered a separate building within the meaning of this limitation.

SECTION 7. This ordinance shall take effect upon its passage.

## ADDENDA.

---

### STREET LINE SET BACKS.

IN BOARD OF STREET COMMISSIONERS  
OF THE CITY OF BOSTON, June 6, 1924.

*Ordered,* That this Board, having passed the order of notice relating to building lines on both sides of Beacon street, Boston Proper, between Arundel and Miner streets on the east and the boundary line between the city of Boston and the town of Brookline on the west, and having caused a copy of said order to be published May 2, 3, 1924, and May 5, 6, 1924, in the Boston Post and the Boston Advertiser, two daily newspapers published in the city of Boston, and in the City Record of May 3, 10, 1924, and having given the public hearing, notice of which was given in said order, do hereby determine that public convenience and necessity require, and do hereby order that building lines be, under the provisions of chapter 462 of the Acts of 1893 and acts in amendment or addition thereto, established on both sides of Beacon street, Boston Proper, between Arundel and Miner streets on the east and the boundary line between the city of Boston and the town of Brookline on the west, as follows:

On the northwesterly side, between Arundel street and the boundary line between the city of Boston and the town of Brookline, substantially parallel with and distant twenty (20) feet from the northwesterly exterior side line of said Beacon street, and substantially parallel with and distant twenty (20) feet from the curved lines of that part



of Beacon street, on the said northwesterly side thereof, known as Audubon Circle.

On the southeasterly side between Miner street and Audubon road, substantially parallel with and distant twenty (20) feet from the southeasterly exterior side line of said Beacon street, and substantially parallel with and distant twenty (20) feet from the curved lines of that part of Beacon street, on the said southeasterly side thereof, known as Audubon Circle, to a point fifty-five (55) feet distant from the aforesaid southeasterly line of said street projected, thence running westerly and parallel with the aforesaid southeasterly line of said street projected to the aforesaid curved line of Audubon Circle.

On the southeasterly side, between Audubon road and the boundary line between the city of Boston and the town of Brookline, substantially parallel with and distant twelve (12) feet from the southeasterly exterior side line of said Beacon street.

Said building lines are shown on a plan marked "City of Boston, Beacon street, Boston Proper, December 1, 1923, F. O. Whitney, Chief Engineer, Street Laying-Out Dept." and on file in the office of the Street Laying-Out Department.

And this Board further orders that existing steps, windows, porticos and the other usual projections appurtenant to the front wall of existing buildings, and parts of existing buildings so far as they lie between the building lines herein established and said Beacon street, may remain as they are at the time of the passage of this order, intending hereby to sanction all existing projections over said line including any necessary foundations and walls supporting said projections.

And this Board further orders, as to future projections, that steps, porticos, balconies, eaves and other usual projections, except bay windows appurtenant to the

front walls of buildings with the necessary foundations to support the same, may project over said lines, and that bay windows or swell fronts with the necessary foundations to support the same may project over the said building lines for a distance not exceeding three (3) feet.

JOHN H. L. NOYES,  
JOHN J. O'CALLAGHAN,  
CHARLES T. HARDING,  
*Street Commissioners.*

Approved, June 10, 1924.

JAMES M. CURLEY,  
*Mayor of Boston, Mass.*

## REFERENCES TO PARTS OF BOSTON BUILDING LAW RELATING TO ZONING.

---

ARRANGED IN CHRONOLOGICAL ORDER IN  
THREE DIVISIONS—USE, HEIGHT AND  
AREA.

### USE.

1893. Chap. 462, Sect. 1.

Board of officers may establish *building line*. To be parallel to and not more than 25 feet from any exterior line of a highway. No structure to be built between building line and street thereafter.

Certain building lines were established on Beacon street and some of the Parkway after passage of this act.

1907. Chap. 550, Sect. 9.

Building limits to stand until changed by ordinance. Certain buildings, as wharves, market sheds and grain elevators, excluded from this restriction if approved by commissioner. Single and two-family buildings may be built of 3d class construction outside original building limits; but no such buildings to occupy more than 60 per cent of lot area. Third class buildings may be enlarged up to 60 per cent of lot area.

Gen. Laws, Chap. 148, Sect. 33. *Combustible Materials*.

Permit must be obtained from fire marshal to keep combustible materials in dwellings or on lot within 50 feet of dwelling. No part of any such building to be used as carpenter's shop, nor for storage of feed, hay, cotton, paper, etc., without permit from marshal.

Gen. Laws, Chap. 148, Sects. 54 and 55. *Tanks for Storage of Fluid.*— (Amended 1919, Chap. 303, Sects. 1 and 3.)

No tank of more than 10,000 gallons capacity for the storage of any fluid other than water, unless underground, to be used without permit from Commissioner of Public Safety.

1907. Chap. 550, Sect. 13.

Stable not to be located within 40 feet of adjoining property, unless authorized by health commissioner after public hearing.

1907. Chap. 550, Sect. 35. (Amended 1923, Chap. 462, Sect. 17.)

First story or basement of 2d and 3d class buildings may be used for *mercantile purposes*, provided certain fire protection regulations are complied with.

1907. Chap. 550, Sect. 36. (Amended 1923, Chap. 462, Sect. 18.)

Permit required for change of occupation or use of a building.

1907. Chap. 550, Sect. 68.

In tenement houses no basement rooms to be occupied for living purposes unless following conditions observed:

Height of rooms to be at least  $8\frac{1}{2}$  feet high.

Window area to be at least  $\frac{1}{8}$  of floor area.

*To sleep* in room whose floor is below curb of public way following conditions must be observed:

At least one side of room shall abut on outside wall for at least 7 feet.

Windows shall open on space at least 15 feet square, and window area shall be at least 10 square feet.

Height of room to be at least  $8\frac{1}{2}$  feet.

## 1907. Chap. 550, Sect. 81.

Any part of a theatre building may be used for stores, offices or habitation provided that exits from the theatre to the street are entirely distinct from rest of building, and if solid partition walls and floors with no openings in same, separate it (the theatre) from the rest of the building.

## 1907. Chap. 550, Sect. 129.

Any court having equity jurisdiction upon application of city by its attorney, may restrain construction, alteration, repair or occupation of a building constructed or used in violation of the provisions of this act.

## 1907. Chap. 550, Sect. 132. (Amended 1913, Chap. 586, Sect. 2.)

Building erected or maintained in violation of this act deemed a nuisance and may be removed by commissioner.

Fine for violating any provisions of this act to be not over \$500.

## Sect. 133.

Parts of chapter 419 of acts of 1892 heretofore unrepealed are hereby repealed and those parts of any other act which are inconsistent are hereby repealed.

## 1911. Chap. 342, Sects. 1 and 2.

*Garage erected within fire limits* to be of 1st class construction.

Garage hereafter erected *in any other part of city* to be of *1st or 2d class construction*.

Garage is building where 5 or more automobiles, using a volatile inflammable liquid for fuel, are kept.

1912. Chap. 259. (Approved March 18, 1912.)  
Buildings at 337 Newbury street exempt from provisions of Chap. 342, 1911, so long as they remain the same size and in same location, provided no part of same is used as dwelling.
1913. Chap. 577, Sects. 1 and 4.  
No building to be erected for or used as a garage without license from board of street commissioners.  
Provisions of act not to affect existing garages except when they be enlarged.
1913. Chap. 577, Sects. 1, 2, 3, 4. Amended 1914, Chap. 119. Sect. 2, 1923. Chap. 316.  
No garage to be erected without license from board of street commissioners after notice and public hearing on application containing names of abutting land owners. "General character of neighborhood" to receive consideration at hearing. No license to be granted for a garage for more than four (4) cars on the same street or within 500 feet of a church, school with more than 50 pupils, or hospital having more than 25 beds.
1918. Chap. 115.  
Metal covered steel frame garages for not more than two automobiles, and not exceeding 500 square feet in area allowed outside of building limits of 1913. To be not nearer than 5 feet to lot line nor 12 feet from any other building.
1919. Chap. 32, Sect. 1.  
Every hospital to register annually in April with Building Department.

## 1919. Chap. 163, Sect. 1.

Every building exceeding 3 stories or 40 feet in height to be used as a hospital shall be a first class building.

Every such building to have at least 2 inclosed stairways with one additional for over 75 occupants and one additional for each 100 occupants additional.

Hospital of 3 stories or less may be of 2d or 3d class construction.

Gen. Laws, Chap. 82, Sect. 37. *Building Lines.*

Building line not more than 40 feet from exterior line of highway may be established.

Gen. Laws, Chap. 85, Sects. 8 and 9. *Signs and Other Structures Projecting Into Ways.*

Municipal board may grant permits for placing of signs, clocks, awnings and other structures on or over a public way.

Preceding section does not apply to signs and structures projecting less than 6 inches over the street, nor to poles, wires, etc., of public utilities.

(Amended 1915, Chap. 176, Sect. 3; 1917, Chap. 344 V Sect. 11.)

Gen. Laws, Chap. 160, Sects. 33, 35, 38 and 40. *Licenses.*

*Public Lodging House*, one in city of 50,000 not licensed as an inn, in which 10 or more persons are lodged for a charge of 25 cents or less per day.

1922. Chap. 5. City Ordinance. Amended 1923, Chaps. 2 and 8. Amended 1924. Chaps. 5 and 6.

The following uses prohibited within 100 feet of *The Fens* (excepting Charlesgate East and Charlesgate West from a point 100 feet north from their intersection with Commonwealth Avenue to Charles river); *Riverway*, including Audubon Road, from Brookline Avenue to Beacon Street; Commonwealth Avenue from Arlington Street to Kenmore Street; and from Washington Street to the Newton line; *Jamaicaway*; *Olmsted Park*; *Arborway*; *Columbia Road* on southerly side from Summer Street and on the northerly side from Boston Street to Marine Park, South Boston; *livery stable, public stable, public garage, mechanical or manufacturing purposes*; no roof for laundry or clothes drying purposes.

1923. Chap. 462, Sect. 17 (Amendment to Acts of 1907, Chap. 550, Sect. 35).

Living room windows of habitable building to face an open area not less than ten square feet and to be not less than 6 feet from opposite wall or lot line.

Does not apply to 3d class building, except provision for window on open air.



## ORDINANCES OF 1924, CHAPTER 6.

## CONCERNING PARK FRONTAGES.

*In the Year One Thousand Nine Hundred and Twenty-Four.*

*Be it ordained by the City Council of Boston, as follows:*

Chapter five of the Ordinances of 1922, as amended by chapters two, eight and twelve of the Ordinances of 1923, and chapter five of the Ordinances of 1924, is hereby further amended in section one by inserting after the words "Sumner street" in the twelfth line of said section, the words "to Dorchester avenue, and from Buttonwood street to Marine Park."

In City Council, September 29, 1924. Passed.

JAMES DONOVAN, *City Clerk.*

Approved, October 15, 1924.

JAMES M. CURLEY, *Mayor.*

A true copy.

Attest:

JAMES DONOVAN, *City Clerk.*

---

## ORDINANCES OF 1924, CHAPTER 8.

## CONCERNING PARK FRONTAGES.

*Be it ordained by the City Council of Boston, as follows:*

Chapter five of the Ordinances of 1922, as amended by chapters two, eight and twelve of the Ordinances of 1923, and chapters five and six of the Ordinances of 1924, is hereby further amended in section one by adding at the end thereof the following words:

*provided, however, that as to the lot of land at the southwest corner of Commonwealth avenue and Massa-*

achusetts avenue the prohibition of the use of building for mercantile purposes shall apply only to so much of any building erected thereon as lies within fifty feet of the southerly line of Commonwealth avenue.

In City Council January 5, 1925.

Approved by the Mayor January 15, 1925.

Attest:

W. J. DOYLE,  
*Assistant City Clerk.*

### STREET LINE SET BACK.

Beacon street, between Massachusetts avenue and Charlesgate East set back of ten feet on southerly side and twenty feet on northerly side. All future projections limited to five feet.

Approved by Mayor January 24, 1925.

See order of December 4, 1924.

### CHAPTER 130, ACTS OF 1925.

#### AN ACT RELATIVE TO BUILDING LINES IN CITIES AND TOWNS.

*Be it enacted, etc., as follows:*

Chapter eighty-two of the General Laws is hereby amended by striking out section thirty-seven and inserting in place thereof the following:— *Section 37.* If a city by its city council or a town accepts this section or has accepted corresponding provisions of earlier laws, a building line not more than forty feet distant from the exterior line of a highway or town way may be established in the manner provided for laying out ways, and thereafter no structures shall be erected or maintained between such building line and such way, except steps, windows, porticos, other

usual projections appurtenant to the front wall of a building, embankments, walls, fences and gates, to the extent prescribed in the vote establishing such building line, and except that any structure existing at the time of the establishment of the building line may be permitted to remain and to be maintained to such extent and under such conditions as may be prescribed in the vote establishing such building line. Whoever sustains damage thereby may recover the same under chapter seventy-nine. A building line established under this section may be discontinued in the manner provided for the discontinuance of a highway or town way. Whoever sustains damages by the discontinuance of a building line may recover the same under chapter seventy-nine. [*Approved March 18, 1925.*]

---

## CHAPTER 219, ACTS OF 1925.

AN ACT RELATIVE TO THE USE OF BUILDINGS AND PREMISES, THE HEIGHT AND BULK OF BUILDINGS AND THE OCCUPANCY OF LOTS IN SPECIFIED DISTRICTS OF THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. Section one of chapter four hundred and eighty-eight of the acts of nineteen hundred and twenty-four is hereby amended by inserting at the end of the fifth paragraph, entitled "*Lot*" the following new sentence:— Two or more buildings other than accessory buildings upon a single parcel of land shall be deemed to occupy separate lots,— so that said paragraph will read as follows:— *Lot:* Land occupied or to be occupied by a building and its accessory buildings, and including the open spaces required under this act. Two or more buildings other than accessory buildings upon a single parcel of land shall be deemed to occupy separate lots.

SECTION 2. Said section one of said chapter four hun-

dred and eight-eight is hereby further amended by inserting at the end of the eighth paragraph, entitled "*Yard, Rear*", the following new sentence:— Where said lines are not parallel the mean depth of the rear yard shall be considered its minimum depth, provided that at no point shall its depth thereby be reduced to less than twelve feet, — so that said paragraph will read as follows:— *Yard, Rear*, An open, unoccupied space on the same lot with a building and between the extreme rear line of said building and the rear line of the lot. Where said lines are not parallel the mean depth of the rear yard shall be considered its minimum depth, provided that at no point shall its depth thereby be reduced to less than twelve feet.

SECTION 3. Section three of said chapter four hundred and eighty-eight is hereby amended by striking out clause (a) of paragraph (8) and inserting in place thereof the following:— (a) A garage, except garage space for not more than two automobiles, of which not more than one may be a commercial automobile, licensed as provided in paragraph (9).

SECTION 4. Section four of said chapter four hundred and eighty-eight is hereby amended by inserting after the word "physicians'" in the sixteenth line the words:— or dentists',— so that the last paragraph will read as follows:— In a general residence district the building commissioner may grant a permit for physicians' or dentists' offices, provided the building or use is not detrimental or injurious to the residential character of the neighborhood.

SECTION 5. Paragraph (22) of section six of said chapter four hundred and eighty-eight is hereby amended by striking out, in the second line of said paragraph, the word "two" and inserting in place thereof the word:— five,— so as to read as follows:— (22) Petroleum or other inflammable liquids: storage in excess of five thousand gallons or manufacture of any of its by-products.

SECTION 6. The last paragraph of section ten of said chapter four hundred and eighty-eight is hereby amended by inserting after the word "lot" in the first line the words:—, whether occupied by a building erected prior to June fifth, nineteen hundred and twenty-four or not,— so that said paragraph will read as follows:—No lot, whether occupied by a building erected prior to June fifth, nineteen hundred and twenty-four or not, shall be so reduced that the yards, courts or other open spaces shall be smaller than prescribed by this act. No yard, court or other open space shall at any time be counted as required open space for more than one building.

SECTION 7. Section thirteen of said chapter four hundred and eighty-eight is hereby amended by striking out, in lines twenty-five to thirty, inclusive, the words "Between the lines of streets intersecting at an angle of less than one hundred and thirty-five degrees and a line joining points on such lines ten feet distant from their point of intersection no building or structure may be erected and no vegetation may be maintained above a height three and one half feet above the plane through their curb grades."

SECTION 8. Section fourteen of said chapter four hundred and eighty-eight is hereby amended by striking out, in lines ten to fifteen, inclusive, the words "*Set-back:* Between the lines of streets intersecting at an angle of less than one hundred and thirty-five degrees and a line joining points on such lines five feet distant from their point of intersection no building or structure may be erected and no vegetation may be maintained above a height three and one half feet above the plane through their curb grades."

SECTION 9. Section sixteen of said chapter four hundred and eighty-eight is hereby amended by inserting at the end of paragraph (9) the following new sentence:—

No yard is required for one story buildings other than dwellings,— so that said paragraph will read as follows:—  
(9) No part of a yard required for a dwelling shall be higher in level above the floor of the first dwelling story than one foot for each two feet of distance from the building or for other buildings a similar distance above the second story floor. No yard is required for one story buildings other than dwellings.

SECTION 10. The second paragraph of section seventeen of said chapter four hundred and eighty-eight is hereby amended by striking out, in the second and third lines of said paragraph, the words “a building or use authorized on” and inserting in place thereof the words:— the provisions of this act governing,— so as to read as follows:— Where the boundary line of a district divides a lot in a single or joint ownership at the time such district is established, the provisions of this act governing the less restricted portion of such lot may extend to the entire lot but in no case for a distance of more than thirty feet.

SECTION 11. The third paragraph of section nineteen of said chapter four hundred and eighty-eight is hereby amended by adding at the end thereof the following new sentence:— The board may adopt rules, not inconsistent with the provisions of this act, governing notice and procedure,— so as to read as follows:— The board of appeal may vary the application of this act in specific cases wherein its enforcement would involve practically difficulty or unnecessary hardship and wherein desirable relief may be granted without substantially derogating from the intent and purpose of this act, but not otherwise. No such variance shall be authorized except by the unanimous decision of the entire membership of the board, rendered upon a written petition addressed to the board and after public hearing thereon, of which notice shall be mailed to the petitioner and to the owners of all property

deemed by the board to be affected thereby as they appear in the most recent local tax list and also advertised in a daily newspaper published in the city of Boston. The board may adopt rules, not inconsistent with the provisions of this act, governing notice and procedure.

SECTION 12. The second paragraph of section twenty of said chapter four hundred and eighty-eight is hereby amended by adding at the end thereof the following:— A majority of the board shall constitute a quorum for all public hearings and for all acts of the board, except that decisions changing the boundaries of districts on the zoning map shall be deemed to comply with this section only in case the written record of such decision is signed by not less than four fifths of the members of the board qualified to act. If less than a majority of the board is present at any public hearing or at any executive session, the members actually present may adjourn the same by proclamation to such time and place as they deem advisable, and further notice thereof shall not be necessary. The board may adopt rules, not inconsistent with the provisions of this act, governing notice and procedure.

SECTION 13. This act shall take effect upon its passage.

[Approved April 6, 1925.]

---

## CHAPTER 335, ACTS OF 1925.

### AN ACT RELATIVE TO FIRE PREVENTION.

*Be it enacted, etc., as follows:*

SECTION 1. Chapter one hundred and forty-eight of the General Laws, as amended in section fourteen by section three of chapter four hundred and eighty-five of the acts of nineteen hundred and twenty-one and by chapter two hundred and fifty-four of the acts of nineteen hundred and twenty-four, is hereby further amended by striking out said section fourteen and inserting in place thereof

the following:— *Section 14.* No building or other structure shall, except as provided in section fifteen, be used for the keeping, storage, manufacture or sale of any of the articles named in section ten, except fireworks, firecrackers and torpedoes, unless the aldermen or selectmen shall have granted a license therefor for one year from the date thereof, after a public hearing, held in the case of cities by the aldermen or any committee thereof designated by them, notice of the time and place of which hearing shall have been given, at the expense of the applicant, by the clerk of the city or by the selectmen, by publication, not less than seven days prior thereto, in a newspaper published in the representative district, if any, otherwise in the city or town, wherein the land on which such license is to be exercised is situated, and also by the applicant by registered mail, not less than seven days prior to such hearing, to all owners of real estate abutting on said land, and unless a permit shall have been granted therefor by the marshal or by some official designated by him for the purpose; provided, that any building or other structure once used under a license and permit granted as aforesaid, or any building or other structure lawfully used for any of said purposes, may be continued in such use from year to year if the owner or occupant thereof shall annually, while such use continues, file for registration with the clerk of the city or town where such building or other structure is situated, and with the marshal or the official designated by him to grant permits in such city or town, a certificate reciting such use and occupancy; and provided, further, that any building used as a garage for storing not more than two vehicles, used wholly for private purposes by the owner or occupant of such building, no part of which building is let out for hire, when once used under such a license and permit, may be continued in such use from year to year without such annual registration, and con-



tinuous use and occupancy thereof for such purpose shall be presumed. The department may by regulation prescribe the amount of explosives, crude petroleum or any of its products, or of any other inflammable fluid or compound, that may be kept for private use in a building or other structure without a license, permit or registration, or any of them.

The right to use a building or other structure for any of said purposes may be revoked for cause, after notice and a hearing given to such owner or occupant, by the aldermen or selectmen having authority to grant licenses for such use, or by the marshal. A fee of one dollar may be charged for the license and a like sum for the permit herein provided for, and one half of said sum for the registration of said certificate. Such building or structure shall always be subject to such alterations in construction and to such regulations of its use in respect to protection against fire or explosion as the department may prescribe.

SECTION 2. Said chapter one hundred and forty-eight is hereby further amended by striking out section sixty and inserting in place thereof the following:-- *Section 60.* Whoever mixes for sale naphtha and illuminating oils or naphtha and oils, to be used for fuel in dwellings or other buildings whereby human life is endangered or exposed, or sells or offers for sale such mixture, or sells or offers for sale, except for remanufacture, illuminating or fuel oils made from coal or petroleum which will evaporate a gas that will flash at a temperature of less than one hundred and fifteen degrees Fahrenheit or ignite at a temperature of less than one hundred and twenty-five degrees Fahrenheit, to be ascertained by the application of Tagliabue's or some other approved instrument, shall be punished by a fine of not more than one hundred dollars or by imprisonment for not more than one month, or both, and shall also be liable for any damage suffered by any person from

the explosion or ignition of such oil thus unlawfully sold or kept or offered for sale. Such oil thus unlawfully sold or kept or offered for sale, and the casks or packages containing the same, shall be forfeited and sold, and the proceeds shall be equally divided between the informer and the commonwealth.

SECTION 3. Section sixty-one of said chapter one hundred and forty-eight is hereby amended by striking out, in the third line, the word "ten" and inserting in place thereof the word:—twenty-five,—so as to read as follows:—*Section 61.* For the purposes of the preceding section, illuminating or fuel oils made from coal or petroleum and having an igniting point of less than one hundred and twenty-five degrees Fahrenheit, to be determined as therein provided, shall be deemed to be mixed with naphtha, and shall be branded unsafe for illuminating purposes or for use as fuel. [Approved May 1, 1925.]

---

#### CHAPTER 182, ACTS OF 1926.

##### AN ACT RELATIVE TO HOSPITAL BUILDINGS IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. Every building in the city of Boston exceeding three stories or forty feet in height hereafter erected, altered or designed for use or occupation as a hospital shall be provided with not less than two fireproof enclosed stairways, and such additional like stairways as the building commissioner of said city, in this act called the commissioner, may determine to be necessary. All of said stairways shall be so located with the approval of the commissioner as to furnish a ready and unobstructed means of egress from all parts of the building. All of said stairways and the stair landings shall have such clear width between hand rails and wall as the commissioner may require, but in no event less than forty-four inches,

and the stair landings shall be free from steps and winders. At least one of the stairways shall communicate with the roof of the building, and all the stairways shall have such exits to grade as the commissioner may require. Such smokeproof doors shall be installed in the building as the commissioner may require.

SECTION 2. The board of appeal provided for by section six of chapter five hundred and fifty of the acts of nineteen hundred and seven and amendments thereof shall act as a board of appeal under this act and under sections one and two of chapter one hundred and sixty-three of the Special Acts of nineteen hundred and nineteen, and the members thereof shall receive therefor the same compensation as is provided in said section six. Any person aggrieved by a requirement of the commissioner under this act or under said section one or two, or by a refusal of the commissioner to issue a permit on account thereof, may appeal within ninety days after being notified of such requirement or refusal to the board of appeal. The appellant shall pay to the commissioner a fee of ten dollars before his appeal shall be heard by the board, and all such fees shall be deposited by the commissioner with the city collector not later than one week after receipt. After notice given to such parties as the board shall order, a hearing shall be had and the board shall affirm, annul or modify the requirement or refusal of the commissioner and shall notify the commissioner and the appellant thereof. If the requirement or refusal is affirmed, it shall have full force and effect, but if annulled or modified, the commissioner shall revoke or amend the requirement appealed from or shall issue a permit, if a permit has been refused, in accordance with the decision of the board. Decisions of the board hereunder shall be in writing and shall require the assent of at least three members.

SECTION 3. So much of said chapter one hundred and sixty-three as is inconsistent herewith shall not apply to hospital buildings described in section one.

SECTION 4. Violation of this act shall be punished by a fine of not more than five hundred dollars.

SECTION 5. This act shall take effect upon its passage.

[Approved April 2, 1926.]

---

### CHAPTER 350, ACTS OF 1926.

AN ACT RELATIVE TO THE POWERS OF THE BOARD OF APPEAL OF THE BUILDING DEPARTMENT OF THE CITY OF BOSTON TO VARY THE APPLICATION OF THE BOSTON ZONING LAW IN RESPECT TO THE HEIGHT OF BUILDINGS.

*Be it enacted, etc., as follows:*

SECTION 1. Section nineteen of chapter four hundred and eighty-eight of the acts of nineteen hundred and twenty-four, as amended by section eleven of chapter two hundred and nineteen of the acts of nineteen hundred and twenty-five, is hereby further amended by inserting after the fourth paragraph the following new paragraph:— No decision of the board of appeal permitting the erection or alteration of a building to an extreme height greater than that otherwise authorized under the provision of this act for the lot or building in question shall be effective until and unless confirmed by the board of zoning adjustment, as provided in section twenty. Immediately following the board's final decision in any such case a copy of the record shall be certified to the board of zoning adjustment,— and by inserting after the word "appeal" in the first line of the fifth paragraph the words:—, except a decision permitting the erection or alteration of a building to an extreme height greater than that otherwise authorized under the provisions of this act,— so as to

read as follows:—*Section 19.* The board of appeal provided for in paragraph one of section six of the aforesaid building law shall act as a board of appeal under this act, and the members thereof shall receive for acting under this act the same compensation as provided in the aforesaid building law.

Any applicant for a permit under this act whose application has been refused may appeal therefrom within ninety days. Any applicant to the building commissioner for a permit who appeals to the said board shall pay to him a fee of ten dollars before such permit shall be considered by the board. Such fees shall be deposited by the building commissioner with the city collector at least once a week.

The board of appeal may vary the application of this act in specific cases wherein its enforcement would involve practical difficulty or unnecessary hardship and wherein desirable relief may be granted without substantially derogating from the intent and purpose of this act, but not otherwise. No such variance shall be authorized except by the unanimous decision of the entire membership of the board, rendered upon a written petition addressed to the board and after public hearing thereon, of which notice shall be mailed to the petitioner and to the owners of all property deemed by the board to be affected thereby as they appear in the most recent local tax list and also advertised in a daily newspaper published in the city of Boston. The board may adopt rules, not inconsistent with the provisions of this act, governing notice and procedure.

The board shall cause to be made a detailed record of all its proceedings, which record shall set forth the reasons for its decisions, the vote of each member participating therein, and the absence of a member or his failure to vote. Such record, immediately following the board's

final decision, shall be filed in the office of the building commissioner and shall be open to public inspection, and notice of such decision shall be mailed forthwith to each party in interest as aforesaid.

No decision of the board of appeal permitting the erection or alteration of a building to an extreme height greater than that otherwise authorized under the provisions of this act for the lot or building in question shall be effective until and unless confirmed by the board of zoning adjustment, as provided in section twenty. Immediately following the board's final decision in any such case a copy of the record shall be certified to the board of zoning adjustment.

Any person aggrieved by a decision of the board of appeal, except a decision permitting the erection or alteration of a building to an extreme height greater than that otherwise authorized under the provisions of this act, whether previously a party to the proceeding or not, or any municipal officer or board may, within fifteen days after the entry of such decision, bring a petition in the supreme judicial court for the county of Suffolk for a writ of certiorari to correct errors of law therein, and the provisions of section four of chapter two hundred and forty-nine of the General Laws shall, except as herein provided, apply to said petition.

No costs shall be allowed against the board unless the court finds that it acted with gross negligence or in bad faith.

SECTION 2. Said chapter four hundred and eighty-eight, as amended in section twenty by section twelve of said chapter two hundred and nineteen, is hereby further amended by striking out said section twenty and inserting in place thereof the following:— *Section 20.* There shall be a board of zoning adjustment to consist of twelve members as follows:— The chairman of the city planning

board ex officio, and eleven members appointed by the mayor in the following manner: one member from two candidates to be nominated by the Associated Industries of Massachusetts, one member from two candidates to be nominated by the Boston Central Labor Union, one member from two candidates to be nominated by the Boston Chamber of Commerce, one member from two candidates to be nominated by the Boston Real Estate Exchange, one member from two candidates to be nominated by the Massachusetts Real Estate Exchange, one member from two candidates, one to be nominated by the Boston Society of Architects and one by the Boston Society of Landscape Architects, one member from two candidates to be nominated by the Boston Society of Civil Engineers, one member from two candidates to be nominated by the Master Builders' Association of Boston, one member from two candidates to be nominated by the Team Owners Association, one member from two candidates to be nominated by the United Improvement Association, and one member to be selected by the mayor. All appointive members shall be residents of or engaged in business in Boston. All appointments after the initial appointments shall be for the term of five years. Vacancies among the appointive members shall be filled in the same manner in which original appointments are made. The several heads of departments of the city of Boston shall on request of the board supply it with all information in their possession useful for its duties.

Either upon petition or otherwise, the board may, subject to the following conditions, change the boundaries of districts by changing the zoning map, on file at the state secretary's office, to meet altered needs of a locality, to avoid undue concentration of population, to provide adequate light and air, to lessen congestion in streets, to secure safety from fire, panic and other dangers, to

facilitate the adequate provision of transportation, water, sewerage and other public requirements and to promote the health, safety, convenience and welfare of the inhabitants of the city of Boston. Such changes shall be made with reasonable consideration, among other things, of the character of the district and its peculiar suitability for particular uses, and with a view to conserving the value of buildings and encouraging the most appropriate use of land. No such change shall be made except by the decision of not less than four fifths of the members of the board, excepting only any member or members not qualified to act, rendered after a public hearing thereon of which notice shall be mailed to the petitioner, if any, to the building commissioner, the chairman of the assessing department, the chairman of the street laying-out department, the commissioner of public works, the fire commissioner and the health commissioner of the city of Boston, and to the owners of all property deemed by the board to be affected thereby as they appear in the most recent local tax list and also advertised in a daily newspaper published in the city of Boston. No member shall act in any case in which he is personally interested either directly or indirectly. A majority of the board shall constitute a quorum for all public hearings and for all acts of the board, except that decisions changing the boundaries of districts on the zoning map or confirming a decision of the board of appeal shall be deemed to comply with this section only if the written record of such decision is signed, in case of any change of boundaries as aforesaid, by not less than four fifths, or, in case of any confirmation of a decision of the board of appeal, by not less than two thirds, of the members of the board qualified to act. If less than a majority of the board is present at any public hearing or at any executive session, the members actually present may adjourn the same by proclamation to such



time and place as they deem advisable, and further notice thereof shall not be necessary. The board may adopt rules, not inconsistent with the provisions of this act, governing notice and procedure.

The board shall review the decision of the board of appeal within forty-five days of the certification to it of a copy of the record thereof in every case wherein permission is granted to erect or alter a building to an extreme height greater than that otherwise authorized under the provisions of this act for the lot or building in question, said review to determine whether or not the relief granted derogates from the intent and purpose of this act. No such permission shall be confirmed except by decision of not less than two thirds of the members of the board, excepting only any member or members not qualified to act, rendered after a public hearing thereon of which notice shall be given as provided in case of a public hearing under the preceding paragraph. If the lot or building in question abuts upon a public park, notice shall also be mailed to the park commissioners of the city of Boston.

The board shall cause to be made a detailed record of all its proceedings, which record shall set forth the reasons for its decisions, the vote of each member participating therein, and the absence of a member or his failure to vote. Such record, immediately following the board's final decision, shall be filed in the office of the building commissioner of Boston and shall be open to public inspection, and notice of such decision shall be mailed forthwith to each party in interest as aforesaid. Upon any decision changing the zoning map, on file at the state secretary's office, an amended map showing such change endorsed by the chairman of said board shall be filed forthwith at said office.

If a change be favorably decided upon or if a decision of the board of appeal shall be confirmed, any person

aggrieved or any municipal officer or board may, within fifteen days after the entry of such decision, bring a petition in the supreme judicial court for the county of Suffolk, for a writ of certiorari setting forth that such decision is in whole or part not in accordance with the duties and powers of such board as above prescribed and specifying the particulars of such non-compliance. The provisions of section four of chapter two hundred and forty-nine of the General Laws shall, except as herein provided, apply to said petition.

No costs shall be allowed against the board unless the court finds that it acted with gross negligence or in bad faith.

The board shall not reduce in any way the area of the one hundred and fifty-five foot district established by this act.

The board shall report its doings annually on or before the tenth day of February to the mayor of Boston and to the general Court.

If any area is hereafter transferred to another district by a change in district boundaries either by action of the board of zoning adjustment or by an amendment to this act, the building and uses then existing within said area shall be subject to the provisions of this act with reference to existing buildings or uses in the district to which the area is removed.

[Approved May 17, 1926.]

---

## CHAPTER 42, ACTS OF 1927.

AN ACT AUTHORIZING THE ERECTION IN CERTAIN SECTIONS OF THE CITY OF BOSTON OF METAL COVERED STEEL FRAME BUILDINGS.

*Be it enacted, etc., as follows:*

SECTION 1. Metal covered steel frame buildings constructed with concrete floors and fire-proof windows and

not more than one story in height may be erected, subject to the approval of the building commissioner of the city of Boston, outside the building limits in said city as such limits existed prior to the twenty-second day of September, nineteen hundred and thirteen; provided, that they shall not be located within two feet of a lot line, or within five feet of a third-class building.

SECTION 2. Such buildings may be used for garages, and if so used may have a capacity of not over two cars and cover an area of not over six hundred square feet in that section of said city between the present building limits and said limits as existing prior to the twenty-second day of September, nineteen hundred and thirteen; and may have a capacity of not over three cars and cover an area of not over eight hundred and fifty square feet in that section of said city outside the present building limits.

SECTION 3. The board of appeal provided for by section six of chapter five hundred and fifty of the acts of nineteen hundred and seven and amendments thereof shall act as a board of appeal under this act, and the members thereof shall receive therefor the same compensation as is provided in said section six. Any person aggrieved by the refusal of the building commissioner to issue a permit on account of the provisions of section one may appeal to said board of appeal. The foregoing provisions of this act shall in all respects be subject to the provisions of chapter four hundred and eighty-eight of the acts of nineteen hundred and twenty-four and any amendment thereof.

SECTION 4. Chapter one hundred and fifteen of the Special Acts of nineteen hundred and eighteen is hereby repealed.

SECTION 5. This act shall take effect upon its passage.

*[Approved February 21, 1927.]*

## CHAPTER 82, ACTS OF 1927.

AN ACT AUTHORIZING SPECIAL LICENSES FOR OPERATORS OF MOTION PICTURE MACHINES IN CHURCHES, SCHOOLHOUSES AND PUBLIC INSTITUTIONS IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

Chapter one hundred and forty-three of the General Laws is hereby amended by striking out section eighty-five and inserting in place thereof the following:—*Section 85.* Notwithstanding any provision of sections seventy-two to eighty-four, inclusive, the commissioner of public safety, upon application accompanied by a fee of two dollars, may grant special licenses for operators of motion picture machines in churches, schoolhouses or public institutions which in his opinion are in safe condition for said exhibitions, and he may prescribe regulations for the proper conduct of the same, but no such license shall be valid for use in the city of Boston unless it also bears the written approval of the building commissioner of said city.

[Approved March 1, 1927.]

## CHAPTER 220, ACTS OF 1927.

AN ACT RELATIVE TO THE USE OF BUILDINGS AND PREMISES, THE HEIGHT AND BULK OF BUILDINGS, AND THE OCCUPANCY OF LOTS IN SPECIFIED DISTRICTS OF THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. The eighth paragraph of section one of chapter four hundred and eighty-eight of the acts of nineteen hundred and twenty-four, as amended by section two of chapter two hundred and nineteen of the acts of nineteen hundred and twenty-five, entitled "Yard, Rear", is hereby further amended by striking out the

first sentence of said paragraph and inserting in place thereof the following:— A space on the same lot with a building, between the extreme rear line of said building and the rear line of the lot and open and unoccupied except by an unenclosed porch not exceeding sixty square feet in area,— so as to read as follows:— *Yard, Rear:* A space on the same lot with a building, between the extreme rear line of said building and the rear line of the lot and open and unoccupied except by an unenclosed porch not exceeding sixty square feet in area. Where said lines are not parallel the mean depth of the rear yard shall be considered its minimum depth, provided that at no point shall its depth thereby be reduced to less than twelve feet.

SECTION 2. The second paragraph of section eleven of said chapter four hundred and eighty-eight, entitled "*Height*," is hereby amended by inserting after said word "*Height*" in the first line the words:— *and Occupancy*,— and by inserting after the word "*height*" in the second line the words:— or accommodate or make provision for more than two families,— so as to read as follows:— *Height and Occupancy:* No building shall exceed thirty-five feet or two and one half stories in height or accommodate or make provision for more than two families.

SECTION 3. The fourth paragraph of said section eleven, entitled "*Side Yards*," is hereby amended by striking out, in the fifth and sixth lines of said paragraph, the words "three inches for every ten feet or fraction thereof that the length of the side yard exceeds fifty" and inserting in place thereof the words:— six inches for every twenty feet or fraction thereof that the length of the side yard exceeds sixty,— so as to read as follows:— *Side Yards:* There shall be a side yard on each side of every building or pair of semi-detached buildings in a single or

general residence district. The minimum width of any side yard provided in a thirty-five foot district shall be six feet, which shall be increased six inches for every twenty feet or fraction thereof that the length of the side yard exceeds sixty feet, provided that on no lot held under a separate and distinct ownership from adjacent lots and of record at the time it is placed in a thirty-five foot district shall the buildable width be reduced by this requirement to less than twenty-four feet.

SECTION 4. The fourth paragraph of section twelve of said chapter four hundred and eighty-eight, entitled "*Side Yards*," is hereby amended by striking out, in the sixth and seventh lines of said paragraph, the words "three inches for every ten feet or fraction thereof that the length of the side yard exceeds fifty" and inserting in place thereof the words: — six inches for every twenty feet or fraction thereof that the length of the side yard exceeds sixty, — so as to read as follows: — *Side Yards*: There shall be a side yard on each side of every building or attached group of buildings other than accessory buildings in a single or general residence district unless there is a party wall. The minimum width of any side yard provided in a forty foot district shall be six feet, which shall be increased six inches for every twenty feet or fraction thereof that the length of the side yard exceeds sixty feet, provided that on no lot held under a separate and distinct ownership from adjacent lots and of record at the time it is placed in a forty foot district shall the buildable width be reduced by this requirement to less than twenty-four feet.

SECTION 5. Paragraph (12) of section sixteen of said chapter four hundred and eighty-eight is hereby amended by inserting after the word "dwelling" in the fifth line of said paragraph the words: —; provided, that on a lot occupied by such a dwelling on June fifth, nineteen hundred and

twenty-four, and not since reduced in area, forty per cent of the rear yard may be so occupied, — so as to read as follows:—(12) On a lot occupied by a dwelling other than a tenement house a one-story building of accessory use thereto and not more than fifteen feet high measured to the mean height of the gable may be located in and occupy not more than thirty per cent of the rear yard of such dwelling; provided, that on a lot occupied by such a dwelling on June fifth, nineteen hundred and twenty-four, and not since reduced in area, forty per cent of the rear yard may be so occupied. The area occupied by such a building of accessory use shall not be included as occupied area in computing the percentage of lot occupancy.

SECTION 6. Section twenty of said chapter four hundred and eighty-eight, as amended by section twelve of said chapter two hundred and nineteen of the acts of nineteen hundred and twenty-five and by section two of chapter three hundred and fifty of the acts of nineteen hundred and twenty-six, is hereby further amended by inserting after the word "Boston" in the fifty-sixth line the following:— Any petition for changing the zoning map shall be accompanied by a fee of ten dollars before being considered by the board. Such fees shall be deposited by the board with the city collector within one month after receipt thereof— and by inserting after the word "Boston" in the eighty-ninth line the following new paragraph:— In all cases where the boundaries of districts are changed so as to include the whole or part of an existing single or general residence district in a zone for less restricted uses the set back required by this act for such district before such change shall remain in force unless and until such limitation shall be rescinded by the board. Such rescision may be inserted in the original order making such change if asked for by said petition and notice thereof given in the

notice of the original petition for the change, or it may be ordered subsequently on petition and notice in the manner required for petitions for a change in the boundaries of districts, — so as to read as follows:— *Section 20.* There shall be a board of zoning adjustment to consist of twelve members as follows:— The chairman of the city planning board ex officio, and eleven members appointed by the mayor in the following manner: one member from two candidates to be nominated by the Associated Industries of Massachusetts, one member from two candidates to be nominated by the Boston Central Labor Union, one member from two candidates to be nominated by the Boston Chamber of Commerce, one member from two candidates to be nominated by the Boston Real Estate Exchange, one member from two candidates to be nominated by the Massachusetts Real Estate Exchange, one member from two candidates, one to be nominated by the Boston Society of Architects and one by the Boston Society of Landscape Architects, one member from two candidates to be nominated by the Boston Society of Civil Engineers, one member from two candidates to be nominated by the Master Builders' Association of Boston, one member from two candidates to be nominated by the Team Owners Association, one member from two candidates to be nominated by the United Improvement Association, and one member to be selected by the mayor. All appointive members shall be residents of or engaged in business in Boston. All appointments after the initial appointments shall be for the term of five years. Vacancies among the appointive members shall be filled in the same manner in which original appointments are made. The several heads of departments of the city of Boston shall on request of the board supply it with all information in their possession useful for its duties.



Either upon petition or otherwise, the board may, subject to the following conditions, change the boundaries of districts by changing the zoning map, on file at the state secretary's office, to meet altered needs of a locality, to avoid undue concentration of population, to provide adequate light and air, to lessen congestion in streets, to secure safety from fire, panic and other dangers, to facilitate the adequate provision of transportation, water, sewerage and other public requirements and to promote the health, safety, convenience and welfare of the inhabitants of the city of Boston. Such changes shall be made with reasonable consideration, among other things, of the character of the district and its peculiar suitability for particular uses, and with a view to conserving the value of buildings and encouraging the most appropriate use of land. No such change shall be made except by the decision of not less than four fifths of the members of the board, excepting only any member or members not qualified to act, rendered after a public hearing thereon, of which notice shall be mailed to the petitioner, if any, to the building commissioner, the chairman of the assessing department, the chairman of the street laying-out department, the commissioner of public works, the fire commissioner and the health commissioner of the city of Boston, and to the owners of all property deemed by the board to be affected thereby as they appear in the most recent local tax list and also advertised in a daily newspaper published in the city of Boston. Any petition for changing the zoning map shall be accompanied by a fee of ten dollars before being considered by the board. Such fees shall be deposited by the board with the city collector within one month after receipt thereof. No member shall act in any case in which he is personally interested either directly or indirectly. A majority of the board shall

constitute a quorum for all public hearings and for all acts of the board, except that decisions changing the boundaries of districts on the zoning map or confirming a decision of the board of appeal shall be deemed to comply with this section only if the written record of such decision is signed, in case of any change of boundaries as aforesaid, by not less than four fifths, or, in case of any confirmation of a decision of the board of appeal, by not less than two thirds, of the members of the board qualified to act. If less than a majority of the board is present at any public hearing or at any executive session, the members actually present may adjourn the same by proclamation to such time and place as they deem advisable, and further notice thereof shall not be necessary. The board may adopt rules, not inconsistent with the provisions of this act, governing notice and procedure.

The board shall review the decision of the board of appeal within forty-five days of the certification to it of a copy of the record thereof in every case wherein permission is granted to erect or alter a building to an extreme height greater than that otherwise authorized under the provisions of this act for the lot or building in question, said review to determine whether or not the relief granted derogates from the intent and purpose of this act. No such permission shall be confirmed except by decision of not less than two thirds of the members of the board, excepting only any member or members not qualified to act, rendered after a public hearing thereon of which notice shall be given as provided in case of a public hearing under the preceding paragraph. If the lot or building in question abuts upon a public park, notice shall also be mailed to the park commissioners of the city of Boston.

In all cases where the boundaries of districts are changed so as to include the whole or part of an existing single or general residence district in a zone for less restricted uses the set back required by this act for such district before such change shall remain in force unless and until such limitation shall be rescinded by the board. Such rescision may be inserted in the original order making such change if asked for by said petition and notice thereof given in the notice of the original petition for the change, or it may be ordered subsequently on petition and notice in the manner required for petitions for a change in the boundaries of districts.

The board shall cause to be made a detailed record of all its proceedings, which record shall set forth the reasons for its decisions, the vote of each member participating therein, and the absence of a member or his failure to vote. Such record, immediately following the board's final decision, shall be filed in the office of the building commissioner of Boston and shall be open to public inspection, and notice of such decision shall be mailed forthwith to each party in interest as aforesaid. Upon any decision changing the zoning map, on file at the state secretary's office, an amended map showing such change endorsed by the chairman of said board shall be filed forthwith at said office.

If a change be favorably decided upon or if a decision of the board of appeal shall be confirmed, any person aggrieved or any municipal officer or board may, within fifteen days after the entry of such decision, bring a petition in the supreme judicial court for the county of Suffolk for a writ of certiorari setting forth that such decision is in whole or part not in accordance with the duties and powers of such board as above prescribed and specifying the par-

particulars of such non-compliance. The provisions of section four of chapter two hundred and forty-nine of the General Laws shall, except as herein provided, apply to said petition.

No costs shall be allowed against the board unless the court finds that it acted with gross negligence or in bad faith.

The board shall not reduce in any way the area of the one hundred and fifty-five foot district established by this act.

The board shall report its doings annually on or before the tenth day of February to the mayor of Boston and to the general court.

If any area is hereafter transferred to another district by a change in district boundaries either by action of the board of zoning adjustment or by an amendment to this act, the buildings and uses then existing within said area shall be subject to the provisions of this act with reference to existing buildings or uses in the district to which the area is removed.

SECTION 7. Section two of this act shall take effect upon its acceptance by vote of the city council of the city of Boston, subject to the provisions of its charter, provided that such acceptance occurs during the current year. Sections one and three to six, inclusive, and, for the purpose only of being submitted to the city council as aforesaid, section two of this act, shall take effect upon their passage.

[Approved April 6, 1927.]

---

## CHAPTER 246, ACTS OF 1927.

AN ACT RELATIVE TO A CERTAIN RESTRICTION IMPOSED BY THE COMMONWEALTH BY DEEDS OF CERTAIN LANDS IN THE BACK BAY DISTRICT OF THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. The parcel of land in the city of Boston in the county of Suffolk bounded and described as follows:—

Beginning at a point on the easterly line of Berkeley street and the southerly line of Newbury street; thence easterly on said southerly line of Newbury street, one hundred and twenty feet; thence southerly and parallel with the easterly line of Berkeley street, one hundred and twelve feet to a passageway sixteen feet wide; thence westerly on said passageway, one hundred and twenty feet to the easterly line of Berkeley street; thence northerly on said easterly line of Berkeley street, one hundred and twelve feet to the point of beginning, containing thirteen thousand four hundred and forty square feet; or however otherwise said premises may be bounded and described and be any or all of said measurements more or less; being the same premises conveyed to George Goss and Norman C. Munson by the commonwealth of Massachusetts acting through the commissioners on the Back Bay in pursuance of chapter seventy-nine of the resolves passed in the year eighteen hundred and fifty-two and chapter seventy of the resolves passed in the year eighteen hundred and fifty-seven by deed dated September fifteenth, eighteen hundred and fifty-nine and recorded with Suffolk deeds, book seven hundred and sixty-six, folio one hundred and five, and

The parcel of land in said city and county bounded and described as follows:— Beginning at a point on the southerly line of Newbury street one hundred and fifty-four feet west of the westerly line of Arlington street; thence southerly by land formerly of Parker, Cabot, Clark and Perry, one hundred and twelve feet to a passageway sixteen feet wide; thence westerly on said passageway, one hundred and twelve feet; thence northerly on land formerly of the commonwealth of Massachusetts, one hundred and twelve feet to the southerly line of Newbury street; thence easterly on said southerly line of Newbury street, one hundred and twelve feet to the point of beginning, containing twelve thousand five hundred and forty-

four square feet; or however otherwise said premises may be bounded and described and be any or all of said measurements more or less; being the same premises conveyed to George Goss and Norman C. Munson by the commonwealth of Massachusetts acting through the commissioners on the Back Bay in pursuance of chapter seventy-nine of the resolves passed in the year eighteen hundred and fifty-two and chapter seventy of the resolves passed in the year eighteen hundred and fifty-seven by deed dated July sixth, eighteen hundred and fifty-nine, recorded with Suffolk deeds, book seven hundred and sixty, folio two hundred and thirteen, are hereby released from the operation and effect of the restriction imposed in said deeds on said premises that no building erected upon the said premises shall be used for "mercantile" purposes, and the division of waterways and public lands of the department of public works is hereby authorized, on the request of the owner or owners of each parcel of land so released, to execute and deliver to such owner or owners a release in writing of said parcel of land from said restriction.

SECTION 2. This act shall take effect upon its passage.

*(The foregoing was laid before the governor on the fifth day of April, 1927, and after five days it had "the force of a law", as prescribed by the constitution, as it was not returned by him with his objections thereto within that time.)*

---

## CHAPTER 342, ACTS OF 1927.

AN ACT RELATIVE TO THE REQUIREMENT OF YARD SPACES ON CERTAIN LOTS ON THE NORTHERLY SIDE OF BEACON STREET IN THE CITY OF BOSTON AS AFFECTING TENEMENT HOUSES.

*Be it enacted, etc., as follows:*

Section fifty-five of chapter five hundred and fifty of the acts of nineteen hundred and seven is hereby amended

by inserting after the word "feet" in the forty-fourth line the following:—; provided, that on any lot situated between the north line of Beacon street and the alley known as Back street, and between Embankment road and Massachusetts avenue, including corner lots, in place of a yard space midway between said Beacon street and said alley or elsewhere, said yard space shall be not less than thirty feet in depth southerly from said Back street, irrespective of the height of the building, but structures not over twelve feet in height may be erected in said yard space,—so that the sixth paragraph of said section will read as follows:— Whenever a tenement house is hereafter erected upon a lot which runs through from street to street, or from a street to an alley or open passageway, and said lot is one hundred and fifty feet or more in depth, said yard space shall be left midway between the two streets, and shall extend across the entire width of the lot, and shall be not less than twenty-four feet in depth from wall to wall, and shall be increased in depth at least two feet for every additional ten feet in height of the building, or fraction thereof, above fifty feet; provided, that on any lot situated between the north line of Beacon street and the alley known as Back street, and between Embankment road and Massachusetts avenue, including corner lots, in place of a yard space midway between said Beacon street and said alley or elsewhere, said yard space shall be not less than thirty feet in depth southerly from said Back street, irrespective of the height of the building, but structures not over twelve feet in height may be erected in said yard space.

*(This bill, returned by the governor to the senate, the branch in which it originated, with his objections thereto, was passed by the Senate April 28, and, in concurrence, by the House of Representatives, April 28, the objections of the governor notwithstanding, in the manner prescribed by the constitution; and thereby has "the force of a law.")*

## CHAPTER 70, ACTS OF 1928.

AN ACT RELATIVE TO NOTICE OF HEARINGS BEFORE THE DEPARTMENT OF PUBLIC UTILITIES UPON APPLICATIONS FOR EXEMPTION OF PREMISES OF PUBLIC SERVICE CORPORATIONS FROM THE ZONING LAWS OF THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

Section twenty-two of chapter four hundred and eighty-eight of the acts of nineteen hundred and twenty-four is hereby amended by striking out the last paragraph and inserting in place thereof the following:— A building or premises used or to be used by a public service corporation may be exempted from the operation of this act if, upon a petition of the corporation, the department of public utilities shall, after a public hearing of which notice shall seasonably be mailed to the petitioner, and to the owners of all abutting property and of all other property deemed by the department to be affected thereby as they appear in the most recent local tax list, and to the representatives in the general court from the district, and to the member of the city council of the city of Boston from the ward, in which such building or premises are or are to be situated, and also advertised at least once in a newspaper published in said city, decide that the present or proposed situation of the building or premises in question is reasonably necessary for the convenience or welfare of the public.

[Approved March 1, 1928.]

## CHAPTER 76, ACTS OF 1928.

AN ACT RELATIVE TO PLUMBERS' LICENSES AND CERTIFICATES OF REGISTRATION.

*Be it enacted, etc., as follows:*

SECTION 1. Chapter one hundred and forty-two of the General Laws is hereby amended by striking out section six



and inserting in place thereof the following:— *Section 6.* Licenses and certificates issued by the examiners shall be valid throughout the commonwealth, but shall not be assignable or transferable. The examiners shall forward to the board of health of each town, or to the inspector of buildings having control of the enforcement of regulations relative to plumbing in such town, the names and addresses of all persons in such town to whom such licenses have been granted. Licenses shall be issued for one year and may be renewed annually on or before May first upon payment of the required fee. Each holder of a master plumber's certificate or license shall register his name and business address with said inspector of buildings if he has such control, otherwise with the board of health, in the town wherein he desires to engage in business as a master plumber. Any such license or certificate may, after notice and hearing, be suspended or revoked by the examiners upon the violation by the holder thereof of any statute, ordinance, by-law, rule or regulation relative to plumbing, upon failure or refusal of the holder thereof to comply with the rules and requirements of the examiners, or for other sufficient cause.

SECTION 2. Section seven of said chapter one hundred and forty-two is hereby amended by striking out all after the word "committed" in the fifth line and inserting in place thereof the words:— shall give notice thereof to the examiners,— so as to read as follows:— *Section 7.* If in the opinion of such inspector of buildings, if any, otherwise of the board of health, of a town, the holder of a license or certificate violates any statute, ordinance, by-law, rule or regulation relative to plumbing, the said inspector or board of health of the town where such violation is committed shall give notice thereof to the examiners.

[Approved March 1, 1928.]

## CHAPTER 137, ACTS OF 1928.

AN ACT RELATIVE TO THE HEIGHT OF BUILDINGS IN THE  
CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. Section eighteen of chapter five hundred and fifty of the acts of nineteen hundred and seven, as amended by section eleven of chapter four hundred and sixty-two of the acts of nineteen hundred and twenty-three, is hereby further amended by adding at the end thereof the following new paragraph:—

Notwithstanding those provisions of this section which relate to a maximum height limit of one hundred and fifty-five feet, on a lot on which a building one hundred and fifty-five feet in height is permitted part of a building or structure may exceed such height provided the volume of such building or structure does not exceed the number of square feet of buildable area of the lot multiplied by one hundred and fifty-five feet, and provided further that every part of such building or structure above a height equal to two and one half times the effective width of the street but not exceeding one hundred and twenty-five feet shall set back from every street and lot line one foot for each two and a half feet of additional height.

SECTION 2. Section fifteen of chapter four hundred and eighty-eight of the acts of nineteen hundred and twenty-four is hereby amended by striking out the second paragraph of said section, entitled "*Height*," and inserting in place thereof the following new paragraph:

*Height:* No building shall exceed the height limit established by section eighteen of chapter five hundred and fifty of the acts of nineteen hundred and seven, as amended.

[Approved March 19, 1928.]

## CHAPTER 260, ACTS OF 1928.

AN ACT RELATIVE TO THE TERM OF GARAGE AND CERTAIN OTHER LICENSES, PERMITS AND REGISTRATIONS AND TO THE FEES THEREFOR.

*Be it enacted, etc., as follows:*

SECTION 2. Every license, permit and registration as aforesaid in effect on the effective date of this act, or issued or effected after said date and prior to April thirtieth, nineteen hundred and twenty-nine, except a registration to take effect on May first, nineteen hundred and twenty-nine, shall, unless sooner revoked, expire on said April thirtieth. [Approved April 26, 1928.]

*Section 1 has been superseded by Section 1, chapter 325, of the Acts of the year 1928. (See page 398.)*

## CHAPTER 320, ACTS OF 1928.

AN ACT RELATIVE TO APPEALS FROM CERTAIN ORDERS OF THE STATE FIRE MARSHAL.

*Be it enacted, etc., as follows:*

Section five of chapter one hundred and forty-seven of the General Laws is hereby amended by inserting after the word "thereof" in the second line the words:—, except one made by the state fire marshal under section fourteen or forty-five of chapter one hundred and forty-eight,— and by inserting after the word "commissioner" in the sixth line the words:—, or by an order made by the state fire marshal as aforesaid,— so as to read as follows:—

*Section 5.* Any person affected by an order of the department or of a division or office thereof, except one made by the state fire marshal under section fourteen or forty-five of chapter one hundred and forty-eight, may, within such time as the commissioner may fix, which shall not be less than ten days after notice of such order, appeal to the

commissioner, who shall thereupon grant a hearing, and after such hearing may amend, suspend or revoke such order. Any person aggrieved by an order approved by the commissioner, or by an order made by the state fire marshal as aforesaid, may appeal to the superior court; provided, that such appeal is taken within fifteen days from the date when such order is approved. The superior court shall have jurisdiction in equity upon such appeal to annul such order if found to exceed the authority of the department, or upon petition of the commissioner to enforce all valid orders issued by the department. Nothing herein contained shall be construed to deprive any person of the right to pursue any other lawful remedy.

[Approved May 11, 1928.]

---

## CHAPTER 325, ACTS OF 1928.

### AN ACT RELATIVE TO FIRE PREVENTION.

*Be it enacted, etc., as follows:*

SECTION 1. Chapter one hundred and forty-eight of the General Laws, as amended in section fourteen by section three of chapter four hundred and eighty-five of the acts of nineteen hundred and twenty-one, by chapter two hundred and fifty-four of the acts of nineteen hundred and twenty-four, by section one of chapter three hundred and thirty-five of the acts of nineteen hundred and twenty-five and by section one of chapter two hundred and sixty of the acts of the current year, is hereby further amended by striking out said section fourteen and inserting in place thereof the following:—*Section 14.* No building or other structure shall, except as provided in section fifteen, be used for the keeping, storage, manufacture or sale of any of the articles named in section ten, except fireworks, firecrackers and torpedoes, unless the aldermen or selectmen shall have granted a license therefor after a public

hearing, held in the case of cities by the aldermen or any committee thereof designated by them, notice of the time and place of which hearing shall have been given, at the expense of the applicant, by the clerk of the city or of the commission having the authority to grant such licenses or by the selectmen, by publication, not less than seven days prior thereto, in a newspaper published in the representative district, if any, otherwise in the city or town, wherein the land on which such license is to be exercised is situated, and also by the applicant by registered mail, not less than seven days prior to such hearing, to all owners of real estate abutting on said land, and unless a permit shall have been granted therefor by the marshal or by some official designated by him for the purpose; provided, that any building or other structure once used under a license and permit granted as aforesaid, or any building or other structure lawfully used for any of said purposes, may be continued in such use from year to year if the owner or occupant thereof shall annually, on or before April thirtieth, while such use continues, file for registration with the clerk of the city or town where such building or other structure is situated, a certificate reciting such use and occupancy; and provided, further, that any building used as a garage for storing not more than two vehicles, when once used under such a license and permit, or lawfully used for such purpose, may be continued in such use from year to year without such annual registration, and continuous use and occupancy thereof for such purpose shall be presumed. The department may by regulation prescribe the amount of explosives, crude petroleum or any of its products, or of any other inflammable fluid or compound, that may be kept for private use in a building or other structure without a license, permit or registration, or any of them. Every license and permit issued hereunder shall expire on April thirtieth following the date of

issue, and registrations hereunder shall be effected on or before April thirtieth to take effect on May first following. Such fee as may be established from time to time by ordinance or by-law may be charged for any such license, permit and registration, respectively; provided, that the fee for such registration shall be one half of the amount of the fee for such a license.

The right to use a building or other structure for any of said purposes may be revoked for cause, after notice and a hearing given to such owner or occupant, by the aldermen or selectmen having authority to grant licenses for such use, or by the marshal. Such building or structure shall always be subject to such alterations in construction and to such regulations of its use in respect to protection against fire or explosion as the department may prescribe.

SECTION 2. Said chapter one hundred and forty-eight is hereby further amended by striking out section thirty-two and inserting in place thereof the following:— *Section 32.* No volatile inflammable fluid except an amount not exceeding one quart when contained in an approved safety can and no non-volatile inflammable fluid except an amount not exceeding ten gallons for domestic use shall be kept, used or stored in any part of any building used for habitation, and no volatile inflammable fluid in quantity exceeding one gallon and no non-volatile inflammable fluid in quantity exceeding thirty gallons shall be kept, used or stored except in the tank of an automobile, motor boat or stationary engine within fifty feet of any building used for habitation, unless a permit has first been obtained therefor from the marshal under such terms and conditions as he may prescribe.

SECTION 3. Said chapter one hundred and forty-eight is hereby further amended by striking out section thirty-three and inserting in place thereof the following:— *Section 33.* No part of any building used for habitation or that

part of any lot within fifty feet of any building so used shall, except as permitted by section thirty-two, be used for the storage, keeping or handling of any article or material that is or may become dangerous to the public safety as a fire menace unless a permit has first been obtained therefor from the marshal. No part of any such building shall be used as a carpenter shop nor for the storage, keeping or handling of feed, hay, straw, excelsior, shavings, sawdust, cotton, paper stock, feathers or rags, except under such terms and conditions as the marshal may prescribe.

SECTION 4. Section thirty-nine of said chapter one hundred and forty-eight is hereby amended by striking out clauses H and I and inserting in place thereof the following:—H. Requiring the cleaning of chimney flues and vent pipes and the installation of spark arresters in chimneys connected with permanent wood burning furnaces. I. Requiring proper safeguards to be placed and maintained about or over roof skylights and about outer or inner courts or shafts at the roof line.

SECTION 5. Said section thirty-nine is hereby further amended by adding at the end thereof the two following new clauses:—N. Prohibiting or regulating the storage in any lot, building, shed, enclosure or other structure, of any empty wooden packing boxes, cases or barrels in a quantity occupying a space greater than two thousand cubic feet, and regulating the height of piles of lumber in lumber yards. O. Prohibiting the thawing of water pipes by means of a torch or flame, or the fumigation of warehouses, factories or commercial buildings by the use of any volatile inflammable liquid, or any material requiring flame, without a permit from the marshal.

SECTION 6. Said chapter one hundred and forty-eight is hereby further amended by striking out section forty and inserting in place thereof the following:—*Section 40.* The marshal may provide that any rule shall apply gen-

erally throughout the metropolitan district or to any specified part thereof or to any class or description of premises, which shall take effect when approved by the commissioner and the governor and council, and on such dates as they may fix.

SECTION 7. Section fifty-eight of said chapter one hundred and forty-eight is hereby amended by inserting after the word "hundred" in the fourth line the words:— and forty,— so as to read as follows:— *Section 58.* No person shall manufacture, store, keep for sale, sell or transport any compound for use as a stove polish containing any liquid or compound whatsoever which will emit a gas that will flash at a temperature of less than one hundred and forty degrees Fahrenheit, except that foundry paste which contains inflammable compound, if packed in metal containers, sealed by fusion and weighing in gross not less than five pounds, and if such container is labelled "Dangerous — Inflammable compound — Keep away from fire, heat and lights" may be manufactured, stored, kept for sale, sold or transported for use only by stove foundries, stove manufacturers and stove dealers on their own premises under regulations prescribed by the marshal. The flash point of said compound shall be ascertained by use of either Abel-Pensky's or Pensky-Martens' closed cup instrument, or by some other method approved by the marshal.

[*Approved May 14, 1928.*]

---

## CHAPTER 88, ACTS OF 1929.

AN ACT RELATIVE TO THE BUILDING AREA OF CERTAIN LOTS UNDER THE BOSTON ZONING LAW, SO-CALLED.

*Be it enacted, etc., as follows:*

SECTION 1. Paragraph (8) of section sixteen of chapter four hundred and eighty-eight of the acts of nineteen hundred and twenty-four is hereby amended by striking out, in the second and third lines of said paragraph, the words



“may be increased thirty per cent” and inserting in place thereof the words: — provisions herein shall not apply,— so as to read as follows:— (8) In a sixty-five foot or eighty foot district on a lot where no yard is required the building area provisions herein shall not apply.

SECTION 2. This act shall take effect upon its passage.

[Approved March 9, 1929.]

---

## CHAPTER 338, ACTS OF 1929.

AN ACT RELATIVE TO THE HEIGHT OF BUILDINGS ON CERTAIN LAND ABUTTING ON ST. JAMES AVENUE BETWEEN CLARENDON AND DARTMOUTH STREETS IN THE CITY OF BOSTON.

*Be it enacted, etc., as follows:*

SECTION 1. The provisions of section one of chapter four hundred and fifty-two of the acts of eighteen hundred and ninety-eight prescribing a height limit for buildings on land abutting on St. James avenue between Clarendon and Dartmouth streets in the city of Boston shall apply only to any portion of a building within one hundred feet of said St. James avenue and in case any building on land abutting on said St. James avenue between said Clarendon and Dartmouth streets extends more than one hundred feet from said St. James avenue, the volume of the portion of such building within the restricted area hereinbefore mentioned shall not exceed ninety feet times the buildable area of the land within one hundred feet of said St. James avenue, and the volume of the remainder shall not exceed the volume permitted on the buildable area of the remaining land.

SECTION 2. Chapter two hundred and eighty-six of the acts of the current year is hereby repealed.

SECTION 3. This act shall take effect upon its passage.

[Approved May 23, 1929.]

could not find any other... the... of...  
...the... of...  
...the... of...  
...the... of...

...the... of...  
...the... of...  
...the... of...  
...the... of...

...the... of...  
...the... of...  
...the... of...  
...the... of...

...the... of...  
...the... of...  
...the... of...  
...the... of...

...the... of...  
...the... of...  
...the... of...  
...the... of...

---

---

# INDEX.

*See also Supplementary Index. (Page 525.)*

---

---

XIII

(1884) (1885) (1886) (1887) (1888) (1889) (1890) (1891) (1892) (1893) (1894) (1895) (1896) (1897) (1898) (1899) (1900)

# INDEX.

---

Acts of 1907, Chapter 550, and Amendments thereto and General Laws, General and Special Acts relating to the erection, maintenance, inspection and occupation of buildings.

Reference in this Index are to Pages, and Sections of the Laws as amended and in force.

NOTE.— When an asterisk (\*) is placed before a figure, see, also, regulations for escalators and elevators for the Commonwealth of Massachusetts taking effect December 26, 1923.

When a dagger (†) is placed before a figure, see sects. 62 to 71, inclusive, chap. 143, General Laws.

Where comma (,) is added it refers to distinct Pages, Sections.

Where dash (-) is used it refers to inclusive Pages, Sections.

## A.

	Page.	Section.
ACCESS TO ROOFS.		
permanent means of, required.....	18, 128	12, 45
ACCESSORY USE.		
Zoning Act, 1924, c. 488, definition of.....	276	3
limitations of.....	277	3
ACCIDENTS, ELEVATOR.		
to be reported to Building Commissioner.....	119	* 38
ACT EFFECTIVE (JUNE 5, 1924) — ZONING ACT.....	299	25
ADDITIONAL REQUIREMENTS.		
necessary for safety of occupants, commissioner may order.....	12	8
necessary for strength or stability of any structure, commissioner may order.....	12	8
ADJOINING PROPERTY.		
commissioner may enter to secure unsafe building to be supported.....	7 18	5 12
AGGREGATES, CONCRETE.		
cinders or slag may be used for, when.....	28	14
coarse, to consist of.....	28	14
fine, to consist of.....	28	14
AIR DUCTS.		
of fireproof material.....	116	38

	Page.	Section.
"AIR PIPES" — PLUMBING.		
definition of.....	172	112
requirements of.....	175, 177	118
AIR SPACES.		
in walls.....	95	26
AISLES, ASSEMBLY ROOMS.		
must conform to law for theatres, when ordered by Building Commissioner.....	167	107
AISLES, PUBLIC BUILDING.		
must conform to requirements for theatres.....	167	107
no obstructions or temporary seats in.....	166	105
persons not to remain in.....	166	105
AISLES, THEATRE.		
persons not to remain in.....	170	111
regulations for.....	158	88
ALCOVES IN TENEMENT HOUSES.		
light and ventilation; opening into.....	142	63
ALTERATION.		
construction, inspection and maintenance of build- ings, chap. 284, 1910.....	240	
wooden building within the building limits.....	22	13
ALTERATION OF BUILDINGS — PERMISSIBLE — ZONING ACT.		
1924, chap. 488.....	276	2
ALTERATION OF EXISTING BUILDINGS.		
general regulations for.....	107	35
ALTERATIONS.		
affecting stability for fire risk.....	109	35
building to be examined when application is made,	6	3
fire protection for.....	101	32
limit of cost of wooden building, in limits.....	22	13
permit required for.....	4, 18	1, 12
prohibitions relating to (third-class buildings)....	22	13
third-class buildings.....	14	9
to conform to law for new buildings, to extent of alteration.....	22	12
when practically produces a new building.....	109	35
ALTERATIONS AND REPAIRS.		
permits required for.....	18	12
ALTERED.		
what buildings may be, for second-class habitation,	107	35
ALTERED BUILDINGS.		
height not increased.....	107	35
maximum number of stories.....	107	35

	Page.	Section.
ANCHORS.		
for floors.....	20	12
for walls.....	94	24
provision for.....	94	24
"APARTMENT."		
in tenement houses defined.....	125	42
APPEAL, BOARD OF. (See BOARD OF APPEAL.)		
appointment; terms; vacancies; qualifications; decisions; reports, etc.....	8, 9	6, 7
APPEAL FROM BOARD OF APPEAL.....	191	129
APPEALS.		
mode of procedure.....	9	7
time limit.....	9	7
fees for.....	10	7
from decision of State Fire Marshal, chap. 320, Acts of 1928.....	397	
Zoning Act, chap. 488, Acts of 1924.....	293	19
APPLIANCES FOR POWER AND HEAT.		
hazardous buildings, regulations for.....	187	125
APPLICATION AND INTERPRETATION OF ACT — ZONING ACT.		
1924, chap. 488.....	297	22
APPLICATION FOR PERMIT.		
form of.....	5	1
sworn to.....	5	1
to bear name and address of owner.....	5	1
ARC LIGHT.		
for emergency in existing theatres.....	170	111
ARCHITECT.		
to submit calculation sheets.....	10	8
AREA OF BUILDING, EXCEPTIONS AND REGULATIONS, ZONING ACT.		
1924, chap. 488.....	291	16
AREA OF BUILDING — ZONING ACT — DEFINED.		
1924, chap. 488.....	274	1
AREA OF WOODEN BUILDINGS.		
not to be increased, in alteration, in some cases...	22	13
AREAS, RESTRICTION OF.		
FIRST-CLASS BUILDINGS.		
mercantile or storage above first floor, vertical openings to be enclosed with fireproof enclosures,	75	17
to be divided by brick walls to limit area to 10,000 square feet.....	76	17
10,000 square feet may be exceeded, when.....	76	17

	Page.	Section.
AREAS, RESTRICTION OF.		
SECOND-CLASS BUILDINGS.		
mercantile or storage above first floor to be divided by brick walls to limit area to 10,000 square feet,	76	17
ART GALLERIES.		
may be placed above theatres.....	168	108
ASHES.....	190	128
receptacle, tenement house.....	153	75
receptacle to be provided in all buildings.....	190	128
ASHES AND GARBAGE.		
tenement house, receptacles for.....	153	75
ASHLAR.		
when reckoned in thickness of wall.....	93	23
ASPHALT SHINGLES.....	25	13
ASSEMBLY, PLACES OF PUBLIC.		
general requirements.....	165	105
ASSEMBLY ROOMS.		
to be first class when.....	165	105
capacity, dimensions, etc.....	166	105
to conform to law requirements of theatres as to exits, stairways, exit lights, aisles and seats, when ordered by Building Commissioner.....	167	107
ASSISTANTS, BUILDING DEPARTMENT.		
appointed by commissioner.....	3	1
AUDITORIUMS, THEATRE.		
heating apparatus under.....	165	104
seating regulations for.....	158	87
AUTOMATIC DOORS.		
in air shafts.....	76	17
AWNINGS.		
projection, allowed.....	24	13
AXIAL COMPRESSION.		
concentric compression on columns with longi- tudinal reinforcement only .....	51	15
concentric compression on columns when their length does not exceed ten diameters of the core,	51	15
<b>B.</b>		
BACK BAY.		
Beacon street, yard spaces on, chap. 342, Acts of 1927.....	392	
Restrictions on certain streets of, chap. 246, Acts of 1927.....	390	



	Page.	Section.
<b>BACK BAY.</b>		
Saint James avenue, height of buildings on, chap. 338, Acts of 1929.....	403	
<b>BAKERIES AND FAT-BOILING.</b>		
prohibited in tenement houses; exceptions.....	134	53
<b>BAKERIES IN TENEMENT HOUSES.</b>		
fireproofed.....	134	53
<b>BALCONIES.....</b>	93	23
tenement house, requirements of.....	126, 127	43
<b>"BASEMENT."</b>		
definition of.....	17	11
<b>BASEMENTS.</b>		
in tenement houses to be sprinklered, when and how.....	129	45
tenement house requirements for.....	146-148	68
tenement house, rooms in, when exempt from strict compliance of this act.....	147	68
may be used for mercantile purposes, when.....	75	17
<b>BASES — CAST-IRON.</b>		
regulations for use of.....	32	14
<b>BASIS OF DESIGN.</b>		
calculations to be for working stresses and safe loads.....	41	15
<i>See</i> Assumptions A, B, C, D, E.....	41	15
<b>BAY WINDOWS.</b>		
projection allowed.....	24	13
who determines projection.....	24	13
<b>BAYS.</b>		
to be treated as wall bays, when discontinuous flat slab, supported by beams or wall, may be reinforced, when and how.....	57	15
bending in exterior concrete columns supporting flat slab floors formula.....	57	15
for floors, half acts below and half acts above slab,	58	15
for roof, whole bending acts below slab.....	58	15
<b>BEACON STREET.</b>		
height of buildings on, chap. 543, 1902.....	223	
chapter 342, 1927.....	392	
<b>BEAMS.</b>		
bending moment, positive when subject to other than uniform loads.....	45	15
continuous or restrained, span length.....	42	15
method for computation for span of.....	39	14

	Page.	Section.
<b>BEAMS.</b>		
parallel to main reinforcement, shall be designed for bending moments, how . . . . .	45	15
simply supported, span length . . . . .	41	15
steel, tied lengthwise . . . . .	96	27
supporting rectangular slabs, when reinforced in both directions,— proportion of load, how determined . . . . .	46	15
to be considered restrained at ends, when . . . . .	45	15
wooden timbers in walls of second-class buildings,	106	34
<b>BEAMS — RECTANGULAR.</b>		
(a) formulas . . . . .	61	15
(b) T — formulas . . . . .	62	15
(c) reinforced for compression — formulas . . . . .	64	15
<b>BEAMS AND GIRDERS.</b>		
steel, relating to . . . . .	67, 68, 69	16
<b>BEARING.</b>		
when compression is applied to a portion of concrete surface, etc . . . . .	50	15
<b>BEARING WALL, BRICK.</b>		
height of, allowable . . . . .	36	14
concrete, plain, height of, allowable . . . . .	36	14
<b>BENDING.</b>		
compression on extreme fibre . . . . .	51	15
slab floors, how determined . . . . .	47	15
A — strips, mean . . . . .	55	15
B — strips, mean . . . . .	55	15
strips — span, length of . . . . .	55	15
strips — A and B — bending moment, table . . . . .	55	15
<b>BENDING IN SUPPORTING MEMBERS.</b>		
beams or floor slabs when fixed or restrained at a support, the restraining structure (column, wall, etc.) must be proportioned to resist stresses . . . . .	47	15
<b>BENDING MOMENT — FOOTINGS.</b>		
bond stress, in steel, not to exceed . . . . .	52	15
effective area of concrete and steel to resist . . . . .	53	15
in rectangular isolated columns . . . . .	53	15
supporting a round column or pier . . . . .	53	15
<b>BENDING MOMENT — SLABS.</b>		
supported on four sides, distribution of load . . . . .	46	15
<b>BENDING MOMENTS.</b>		
uniformly distributed load, in beam and slab, reinforced in one direction only . . . . .	42	15
See Assumptions A, B, C, D, E, F, G . . . . .	42, 43	15

	Page.	Section.
<b>BENT BARS.</b>		
negative reinforcement in A strips.....	58	15
negative reinforcement in B strips.....	59	15
positive reinforcement in A strips.....	58	15
positive reinforcement in B strips.....	58	15
reinforcing for positive bending, not to be bent up, relative to reinforcement in A strips.....	58	15
relative to reinforcement in B strips.....	58, 59	15
stress in concrete due to bending in each strip, how determined.....	59	15
exception — negative bending in A strips when dropped panels used.....	59	15
<b>BLOCKS — BUILDING.</b>		
absorption allowable per cent of.....	28	14
concrete, how made, compression strength.....	28	14
meaning of.....	28	14
terra cotta, crushing strength.....	28	14
terra cotta, working stress of.....	28	14
<b>BLOW-OFF PIPES.</b>		
how connected.....	184	122
<b>BOARD OF APPEAL.</b>		
<i>See also</i> Chap. 42, Acts of 1927,.....	380	
Chap. 320, Acts of 1928.....	397	
annual report.....	11	8
appointed by Mayor, on nominations.....	8	6
appeals from, to be heard in equity courts.....	191	129
Building Department, Revised Ordinances 1914, chap. 8.....	343	1
composition, etc.....	8	6
decision of, to be in writing.....	9	6
to specify variations allowed.....	9	7
applicants to have copy of.....	9	7
summary of, in annual report.....	11	8
fees for appeals.....	10	7
hearings on appealed cases.....	9	7
may vary provisions of building law.....	9	7
members of, how appointed.....	8	6
terms of.....	8	6
compensation of.....	8	6
not to act when interested.....	9	6
to be Boston men.....	9	6
report, annual, to mayor.....	11	8
to contain summary of decisions.....	11	8
to be printed separately.....	11	8

	Page.	Section.
<b>BOARD OF APPEAL.</b>		
to hear appeals on setting engines and dynamos...	187-188	125
to approve egress for large areas.....	76	17
vacancies in, how filled.....	8	6
who may appeal, to.....	9	7
<b>BOARD OF EXAMINERS.</b>		
board to determine qualifications, Revised Ordinances 1914, chap. 8.....	345	6
board to establish classes, Revised Ordinances 1914, chap. 8.....	344	4
board to issue licenses, Revised Ordinances 1914, chap. 8.....	345	8
Building Department, Revised Ordinances 1914, chap. 8.....	344	3
examinations, Revised Ordinances 1914, chap. 8.	344	4
license may be revoked or suspended, Revised Ordinances 1914, chap. 8.....	346	9
no permit to build or alter to issue unless licensed builder signs application, Revised Ordinances 1914, chap. 8	345	6
penalty, Revised Ordinances 1914, chap. 8.....	347	11
qualifications requisite to take charge of work, Revised Ordinances 1914, chap. 8.....	344	5
work to stop unless licensed builder is in charge, Revised Ordinances 1914, chap. 8.....	347	10
<b>BOARD OF EXAMINERS OF GAS FITTERS.</b>		
not affected by this act.....	15	10
<b>BOARD OF HEALTH.</b>		
may limit number of occupants in any building...	189	128
not affected by this act.....	15	10
powers of, defined.....	189, 190	128
<b>BOARD OF PARK COMMISSIONERS.</b>		
not affected by this act.....	15	10
<b>BOARD OF STREET COMMISSIONERS.</b>		
not affected by this act.....	15	10
<b>BOARD OF ZONING ADJUSTMENT, 1924,</b>		
chap. 488.....	294	20
<b>BOARDS, CITY, CERTAIN.</b>		
authority of, not curtailed by this act.....	15	10
<b>BOILER.</b>		
ceiling over, to be wire lathed and plastered.....	103	32
permit required for placing.....	187	125
smoke pipe to be 12 inches below ceiling.....	103	32

	Page.	Section.
<b>BOILER — RANGE.</b>		
marking, sale and installation of, chap. 142, General Laws.....	312	17, 18
<b>BOILERS AND FURNACES.</b>		
hazardous buildings, hearing on.....	187	125
not to be placed on wooden floors.....	23	13
or under public ways.....	24	13
or under certain parts of theatres.....	165, 169, 104,	111
commissioner may prescribe conditions for main- tenance of.....	187	125
<b>BOND.</b>		
stress between concrete and steel bars.....	52	15
stress between concrete and approved deformed steel bars.....	52	15
stress between concrete and drawn wire.....	52	15
<b>BONDING.</b>		
of walls at corners.....	94	24
<b>BONDING BRICKWORK.</b>		
provision for.....	95	25
<b>BOOTHES, VOTING.</b>		
not affected by this act.....	15	10
<b>BORING OF SOIL.</b>		
may be required.....	82	20
<b>BORINGS.</b>		
required, when, how, number, location.....	82	20
<b>BOULEVARDS.</b>		
building lines on, chap. 82, General Laws.....	301	37
<b>BOUNDARIES OF DISTRICTS. ZONING ACT,</b>		
1924, chap. 488.....	292	17
<b>BOWDOIN STREET.</b>		
height of buildings on, chap. 543, 1902.....	223	
<b>BRACING, WIND.</b>		
provision for.....	39	14
<b>BRACKETS.</b>		
on exterior columns, to be provided, when.....	58	15
on reinforced concrete buildings to transmit load from floor to columns.....	48	15
such columns to be computed.....	48	15
under steel beams, fireproofed.....	98	32
when used, span length.....	42	15

	Page.	Section.
<b>BRICK.</b>		
quality and constituents of.....	27	14
absorption test, requirements of.....	27	14
hard, ultimate compressive strength.....	27	14
wet, compressive strength of.....	27	14
<b>BRICK BEARING WALLS.</b>		
height of unsupported, not to exceed twelve times its least dimension.....	36	14
<b>BRICK PIERS.</b>		
height of, not to exceed twelve times its least di- mension.....	36	14
<b>BRICK WALLS.</b>		
flat slab supported by thickness of wall.....	59	15
<b>BRICKWORK.</b>		
stresses of.....	34	14
<b>BRICKWORK — BONDING.</b>		
brick facing in skeleton frame building when not more than 4 inches in thickness.....	95	25
brick walls, to be bonded every eighth course....	95	25
or a full heading every eighth course.....	95	25
may be bonded by metal ties.....	95	25
provision for.. ..	95	25
such ties to be of galvanized wire .....	95	25
when faced with brick face, in every eighth course, every other brick shall be a full header.....	95	25
diagonal header ties prohibited.....	95	25
<b>BRIDGES, PUBLIC HIGHWAY AND RAIL- WAY, QUAYS, ETC.</b>		
not affected by this act.....	14	10
<b>BUILDERS.</b>		
licensed, to control building operations, chap. 8, R. O. 1914.....	344-347	311
<b>BUILDING AREA, RESTRICTIONS, ZONING ACT, 1924, chap. 488.</b>		
thirty-five-foot district.....	285	11
forty-foot district.....	286	12
sixty-five-foot district.....	287	13
eighty-foot district.....	288	14
one hundred fifty-five foot district.....	289	15
<b>BUILDING BLOCKS.</b>		
absorption, allowable per cent of.....	28	14
relative to and meaning of.....	28	14

	Page.	Section.
<b>BUILDING COMMISSIONER.</b>		
appointment of . . . . .	4	1
authority and powers of . . . . .	3-5, 6	1, 4
may appoint deputy; powers of . . . . .	5	1
may enter any building or premises . . . . .	192	129
may require duplicate plans to be kept at building . . . . .	4	1
may require plans and specifications . . . . .	4	1
may stop work for violation of permits . . . . .	5	1
may order unsafe buildings vacated . . . . .	7	4
may take measures for public safety . . . . .	7, 18	5, 12
not to dispense with tenement house restrictions . . . . .	153	76
qualifications required of . . . . .	3	1
salary of, fixed by City Council . . . . .	3	1
term of office . . . . .	3	1
to approve plumbing of chemical laboratories . . . . .	176	117
to approve elevators . . . . .	118	38
to approve stable drainings . . . . .	177	117
to examine all buildings in course of construction, to examine buildings dangerous, damaged or unsafe . . . . .	5	2
to keep records of violations . . . . .	6	3, 4
to have charge of Building Department . . . . .	5	2
to post notice of unsafe elevators . . . . .	3	1
to submit annual report to Mayor . . . . .	118	38
to submit annual report to Mayor . . . . .	4	1
<b>BUILDING CONSTRUCTION. (See SEPARATE SUBJECTS.)</b>		
height, excavation, etc., regulations for . . . . .	77-80	18, 19
<b>BUILDING DEPARTMENT.</b>		
commissioner to be in charge of . . . . .	3	1
how appointed . . . . .	3	1
term of office . . . . .	3	1
qualifications required . . . . .	3	1
salary of, fixed by City Council . . . . .	3	1
may appoint inspectors, employees and assistants . . . . .	3	1
clerk to keep records, open to public . . . . .	4	1
employees to retain position until removal or discharge . . . . .	3	1
inspectors, qualifications required of . . . . .	3	1
commissioner, salary, term, etc . . . . .	3	1
may enter buildings and premises . . . . .	192	129
not to engage in other business . . . . .	4	1
not to furnish material . . . . .	4	1

	Page.	Section.
<b>BUILDING DEPARTMENT.</b>		
employees not to be financially interested.....	4	1
present to hold office until removal or discharge, .....	3	1
records to be open to public inspection.....	4	1
Revised Ordinances 1914, chap. 8.....	288	1
to enforce building laws in Boston heretofore en- forced by District Police, 1910, chap. 284.....	240	1
under charge of commissioner.....	3	1
<b>BUILDING EGRESS.</b>		
to be satisfactory before occupancy.....	19	12
<b>BUILDING FOUNDATION.</b>		
when resting only in part on solid ledge.....	82	20
<b>BUILDING INSPECTION.</b>		
commissioner, or inspector, to examine all build- ings in course of construction.....	5	2
<b>BUILDING LAW, 1907.</b>		
approved June 22.....	193	134
in effect August 1.....	193	134
exceptions and exemptions from provisions of....	14	10
equity courts given powers to enforce.....	190	129
law courts given jurisdiction in law cases.....	192	130
not to deprive certain city boards and officers of power.....	15	10
not to deprive other departments, etc., of author- ity already held.....	15	10
officials may enter building and premises.....	192	129
violators of, may be fined \$500.....	193	132
<b>BUILDING LAWS.</b>		
Boston, to be enforced by Building Department heretofore enforced by District Police, 1910, chap. 284.....	240	1
<b>BUILDING LIMITS.</b>		
City Council may change, extend and define ....	13	9
dwelling in, may be of third class, when .....	13	9
dwelling in, may be composite, when.....	13	9
dwelling in, third-class, not to exceed two families, further restrictions relative to .....	13	9
outline of chap. 41, R. O. 1914 .....	347	
present, to continue until changed .....	13	9
Revised Ordinances of 1914, chap. 41.....	347	1
<b>BUILDING LINE.</b>		
in public ways, General Laws, chap. 82.....	301	37



	Page.	Section.
BUILDING LINE ON HIGHWAYS.		
restrictions as to buildings, 1893, chap. 462.....	201	1
BUILDING LINES.		
established by Park Commission.....	203-205	
may be established, General Laws, chap. 82.....	301	37
on parkways, boulevards, etc.....	301	37
prohibitive relative to building when same are established, General Laws, chap. 82.....	301	37
BUILDING LINES ESTABLISHED.....	202	
BUILDING MATERIALS. (See SEPARATE SUB- JECTS.)		
combustible not to be kept in habitable buildings,	188	126
commissioner has power to reject.....	27	14
quality of mortar, cement and concrete.....	26-31	14
BUILDING, OCCUPATION OF		
not unless means of egress are provided.....	19	12
BUILDING OPERATIONS.		
control of, chap. 8, R. O. 1914.....	344-347	311
BUILDING PERMITS. (See also, PERMITS.)		
application for.....	5	1
how and by whom granted.....	4	1
if terms of, are violated commissioner may stop work.....	5	1
must be on approved printed forms.....	5	1
requirements for.....	5	1
BUILDING PROHIBITIONS.		
list of general.....	22-26	13
"BUILDING, STORY OF."		
definition of.....	17	11
BUILDINGS. (See HAZARDOUS BUILDINGS.)		
classes, of defined.....	15-16	11
height of, defined.....	16	11
height of, special commission appointed to deter- mine and revise boundaries of districts A and B, Special Acts 1915, chap. 333.....	249	
inspection during construction.....	5	2
outside finish of.....	20	12
not covered by law.....	14	10
not affected by fire limits.....	13	9
for manufacturing purposes outside limits, maxi- mum height.....	77	17
on same lot with tenement house.....	141	62
in public parks, chap. 129, 1889.....	201	

	Page.	Section.
<b>BUILDINGS.</b>		
height of, in Boston, chap. 333, 1904, and chap. 383, 1905, as amended by chap. 174 of 1922, 226, 232		
chapter 137, Act of 1928.....	396	
height of, on Copley square, chap. 452, 1898.....	220	
height of, on Rutherford avenue, chap. 416, 1907,	238	
construction, alteration, inspection and main- tenance of, chap. 284, 1910.....	240	
burned, dilapidated, dangerous, nuisances, Gen- eral Laws, chap. 139.....	303-304	1-3
occupation or use of, not to be changed without permit from commissioner.....	112	36
prohibitions relating to alterations of wooden buildings.....	22	13
use of occupation of.....	112	36
wooden, within building limits, may be altered or enlarged when and how.....	14	9
moving, wooden buildings.....	22	13
repairs, wooden buildings.....	22	13
requirements for all.....	18-22	12
commissioner may enforce.....	18	12
restriction of area, chap. 137, Acts of 1928.....	75	17
record of violations to be kept.....	5	2
erected since August 1, 1907, shall be considered as erected in conformity to law, when and how, Special Act, 1915, chap. 254.....	247	
appliance for heat and power in.....	187-188	125
hearings on.....	187	125
must have permits.....	187	125
allowed within building limits.....	13	9
may be vacated or torn down, by Health Commis- sioner, 1897, chap. 219.....	206	1
public parks, 1889, chap. 129.....	201	1
vacated, may be, when, volume of, chap. 137, Acts of 1928.....	7	4
<b>BUILDINGS, ALTERATION OF EXISTING.</b>		
general regulations for.....	107-109	35
<b>BUILDINGS, CERTAIN, OUTSIDE LIMITS.</b>		
commissioner, to prescribe condition for.....	77	17
<b>BUILDINGS, CLASSIFICATION OF.</b>		
first and second classes.....	74	17
<b>BUILDINGS, COMPOSITE.</b>		
definition of.....	16	11

	Page.	Section.
BUILDINGS, DANGEROUS OR DAMAGED.		
commissioner to examine and make record.....	6	3, 4
BUILDINGS, EXPOSURES.		
regulations for, when remodelled, etc.	108	35
BUILDINGS, FEDERAL.		
not affected by this act.....	14	10
BUILDINGS, FIRST-CLASS.		
definition of.....	15	11
BUILDINGS, OCCUPANTS OF.		
board of health may limit number of.....	189	123
BUILDINGS PERMISSIBLE TO BE ERECTED, ALTERED OR USED. ZONING ACT, 1924. chap. 488.		
single residence.....	276	3
general residence.....	277	4
local business.....	278	5
general business.....	279	6
industrial districts.....	280	7
unrestricted districts.....	282	8
non-conforming uses.....	282-283	9
BUILDINGS, PUBLIC. ( <i>See PUBLIC BUILDINGS.</i> )		
must conform to regulations for theatres.....	167	107
BUILDINGS, REINFORCED CONCRETE.		
may be of supported structural steel or of cast-iron columns.....	48	15
said supports to be fireproofed.....	48	15
BUILDINGS, SECOND-CLASS.		
definition of.....	16	11
BUILDINGS, STATE.		
not affected by this act.....	14	10
BUILDINGS, THIRD-CLASS.		
definition of.....	16	11
BUILDINGS UNLAWFULLY CONSTRUCTED.		
deemed nuisances.....	192	132
abatement and removal of.....	192	132
BUILDINGS, WOODEN.		
general regulations for construction of... 120-121,	122-123	39, 40
height of.....	122-123	40
not to be moved within building limits.....	22	13
proximity to other buildings.....	122-123	40
BUILDINGS AND STRUCTURES.		
owner responsible for maintenance of.....	189	127
responsibility of lessees	189	127

BULK DISTRICTS. ZONING ACT, 1924, chap. 488.		
thirty-five feet.....	285	11
forty feet.....	286	12
sixty-five feet.....	287	13
eighty feet.....	288	14
one hundred fifty-five feet.....	289	15
regulation, height and area.....	289-291	15
exceptions, height and area.....	289-291	15
BULKHEADS.		
on roofs, 1905, chap. 383.....	235	4
BULKHEADS AND SCUTTLES.		
tenement house, requirements for.....	127	44
BURNT OR DANGEROUS BUILDINGS.		
how disposed of, General Laws, chap. 139.....	303	1
nuisance may be abated, General Laws, chap. 139,	304	3
owner may appeal to Superior Court, General		
Laws, chap. 139.....	304	2
<b>C.</b>		
CAISSON.		
may be used to carry foundation down to ledge...	83	20
CALCULATION OF STRAINS.		
to be submitted.....	10	8
CALCULATION SHEETS.		
must be signed by architect, engineer, contractor		
or responsible person.....	10	8
CAPITALS.		
enlarged columns may be provided with.....	54	15
horizontal width of.....	54	15
width in any direction.....	54	15
CAST IRON.		
strength.....	31	14
to conform to standard specifications.....	31	14
CAST-IRON COLUMNS.		
use of, when permitted.....	31	14
to be faced at ends, etc.....	31	14
when hollow, regulations for use of.....	31	14
in garages, etc., prohibited.....	37	14
use of, prohibited when.....	31, 37	14
to be faced at ends, etc.....	31	14

	Page.	Section.
CAST-IRON COMPRESSION.		
members, value of.....	37	14
centrally loaded, safe load.....	37	14
CAST-IRON LINTELS.		
regulations for use of.....	32	14
to be not less than $\frac{3}{4}$ inch in thickness.....	32	14
not to be used for spans over six feet.....	32	14
CEILING.		
flush, fireproofing same as for slabs.....	50	15
suspended, fireproofing same as for slabs.....	50	15
metal lath and plaster, suspended, fireproofing same as for slabs.....	50	15
CEILINGS.		
in tenement house cellars, metal-lathed and plastered.....	132	49
ceilings, tenement house, construction of.....	132	49
over furnaces, boilers, etc., to be protected.....	103	32
CEILINGS, CELLAR.		
tenement house, construction of.....	132	49
CELLAR.		
definition of.....	17	11
CELLARS.		
rat proofing.....	90	22
to be protected from water and dampness.....	90	22
how protected.....	90	22
cellar floors not to be constructed below Grade 12, exceptions, when made waterproof.....	90	22
metal foundations to be protected from dampness, structural metal work underground, to be pro- tected from dampness.....	90	22
protection from dampness, method of.....	90	22
lowest, without waterproofing.....	90	22
CEMENT, LIME, MORTAR.		
required mixture, etc.....	29	14
CHANGE.		
in use or occupation of buildings, permit for, required.....	112	36
CHASE.		
required thickness outside.....	23	13
CHEMICAL LABORATORIES.		
plumbing of, to be approved by commissioner....	176	117
CHEMICAL WORKS.		
require permit.....	187	125

	Page.	Section.
CHIMNEY FLUES.		
height of, above roof.....	18	12
lining required.....	19	12
CHIMNEYS.		
floor timber not to be within 2 inches of.....	23	13
restrictions relating to.....	23	13
thickness of walls.....	19	12
how much to be corbelled.....	23	13
hung from 12-inch wall.....	23	13
studding, distance from.....	23	13
firestopping of.....	102	32
construction of.....	19	12
CHURCHES.		
use of cinematograph in, regulation for, moving picture exhibition in, Mayor to grant permit for, chap. 280, 1913.....	243	1
CINDER CONCRETE.		
composed of.....	29	14
CINDERS.		
may be used for concrete aggregate, when.....	28	14
composition of.....	29	14
CINEMATOGRAPH.		
regulation for use of, General Laws, chap. 143. . .	332	72
operation of, General Laws, chap. 143.....	332	72
CIRCULAR HOLLOW STEEL COLUMNS.		
filled with concrete, load allowance.....	48	15
CIRCULAR WROUGHT-IRON COLUMNS.		
filled with concrete, load allowance.....	48	15
CITY COUNCIL.		
to fix salary of Building Commissioner.....	3	1
CITY OFFICERS, CERTAIN.		
authority of, not curtailed by this act.....	15	10
CLASSES OF BUILDINGS.		
definition of.....	15-16	11
CLASSIFICATION.		
of buildings.....	74-77	17
CLAY.		
soft, maximum allowable bearing value in founda- tions.....	81	20
medium stiff, maximum allowable bearing value in foundations.....	81	20
hard, definition of.....	81	20
soft, definition of.....	81	20
medium, definition of.....	81	20

	Page.	Section.
CLEAN-OUTS, FERRULES, ETC.		
required diameter and weight of.....	179	121
CLERK, BUILDING DEPARTMENT.		
duties of, defined.....	4	1
CLOCKS.		
projecting into ways, permit for, General Laws, chap. 85.....	302	8
CLOSETS.		
under staircases, restrictions.....	24	13
COLUMNS.		
cast-iron, restrictions.....	31	14
cast-iron, parts bolted.....	96	27
cast-iron, strength.....	31	14
exterior, isolated, fireproofing.....	100	32
reinforced, concrete, rules for.....	47, 48	15
to be fireproofed and how.....	99, 100	32
reduction of floor loads.....	113	36
wheel guards on.....	101	32
steel, parts riveted.....	96	27
steel, strength.....	31	14
wood, strength.....	38	14
to be of masonry or metal, when.....	20	12
loaded eccentrically.....	37	14
main reinforcement in floor slabs to be protected, maximum effective area of.....	41 47	15 15
longitudinal reinforcement of.....	47	15
exterior, reinforcement how proportioned.....	48	15
strength of, how computed, when core of, shifted, hollow, steel circular, filled with concrete, load allowance.....	37 48	14 15
wrought-iron, circular, filled with concrete, load allowance.....	48	15
with longitudinal reinforcement only, steel area of, longitudinal reinforcement bars, secured against displacement, how.....	49 49	15 15
with longitudinal reinforcement, when allowed stresses given in this act.....	49	15
outside finish of, to be of masonry or metal, when, hoop or spirals to be united so as to produce full strength.....	20 49	12 15
footings symmetrical, concentric, to be designed, how.....	53	15
exterior bracket to be provided, when.....	58	15
carrying masonry, thickness of fire protection....	99	32

## COLUMNS.

carrying floors, thickness of fire protection . . . . .	99	32
carrying roof, thickness of fire protection . . . . .	99	32

## COLUMNS, CAST-IRON.

use of, when not permitted . . . . .	31	14
to be faced at ends, etc. . . . .	31	14
when hollow, regulations for use of . . . . .	31	14
use of, prohibited in garages . . . . .	37	14

## COLUMNS, CONCRETE.

to be reinforced, when . . . . .	47	15
unsupported, height of . . . . .	47	15

## COLUMNS AND WALLS.

how poured, when to be poured . . . . .	40	15
---	----	----

## COMBINATION FLOORS.

concrete floors, with permanent blocks, to conform to this act . . . . .	49	15
not to be figured as taking stress . . . . .	49	15
slab, cast monolithic, considered T section, when, flush ceiling, fireproofing, same as for slabs . . . . .	50	15
suspended metal lath and plaster ceiling, fireproofing, same as for slabs . . . . .	50	15

## COMBUSTIBLE MATERIALS.

not to be kept in habitable buildings . . . . .	188	126
storage of . . . . .	188	126

## COMBUSTIBLE ROOFING.

not permitted . . . . .	25	13
-------------------------	----	----

## COMMISSIONER.

experience required, appointment, etc . . . . .	3	1
salary, how fixed . . . . .	3	1
appoints inspectors, employees, etc . . . . .	3	1
power to reject materials . . . . .	27	14
in charge of department . . . . .	3	1
may abate as a nuisance a building in violation of law . . . . .	192	132
may placard buildings:		
(a) not provided with sufficient egress . . . . .	6	4
(b) where violations of building law exist . . . . .	6	4
(c) unsafe or dangerous buildings . . . . .	6	4
may allow "equivalent" methods . . . . .	11	8
may appoint elevator inspectors, one for each 1,000 elevators . . . . .	120	38
may secure unsafe buildings . . . . .	7	5
may remove unsafe buildings . . . . .	7	5



	Page.	Section.
COMMISSIONER.		
may support at dangerous excavations . . . . .	79	19
may order unsafe building vacated . . . . .	7	4
may require additional safeguards on elevators . . .	120	38
may require alterations to conform to rules for new buildings . . . . .	109	35
may require borings for foundations . . . . .	82	20
may require fire damage repairs to conform to rules for new buildings . . . . .	109	35
may require inspector of piling . . . . .	86	21
may require more exits in theatres . . . . .	161	99
may require oath to application . . . . .	5	1
may require plans and specifications . . . . .	4	1
may require tests . . . . .	11	8
may require tests of cast-iron columns . . . . .	32	14
may require tests of materials . . . . .	27	14
may require inspector on concrete work . . . . .	31	14
to determine necessary egress . . . . .	19	12
to determine necessity for temporary floors . . . . .	124	41
to determine quality of materials . . . . .	26	14
to determine requirements not covered by this act . . . . .	11	8
to fix floor loads not specified . . . . .	112	36
to fix number gas outlets in theatres . . . . .	162	99
to grant permits . . . . .	4	1
to print Board of Appeal report . . . . .	11	8
to inspect unsafe and dangerous buildings . . . . .	6	4
to determine requirements for strength of building,	12	8
to determine requirements for safety of occupants,	12	8
to issue permits for alteration and repair of wooden buildings . . . . .	22	13
to issue permits for hazardous buildings . . . . .	187	125
to issue permits for engines, boilers, etc . . . . .	187	125
to issue permits for plumbing . . . . .	173	114
to issue permits in accordance with decisions of Board of Appeal . . . . .	10	7
to make record of violation . . . . .	5	2
to notify owners or agents of unsafe and dangerous buildings . . . . .	6	4
not to waive tenement requirements . . . . .	153	76
or inspector to examine all buildings being con- structed or altered, dangerous or damaged, or when permit has been requested . . . . .	5, 6	2, 3

	Page.	Section.
COMMISSIONER.		
powers in case of violation . . . . .	5	1
to pass on exits in altered habitations . . . . .	107	35
to pass on exposure in altered habitations . . . . .	108	35
to pass on securing of seats in halls, etc. . . . .	166	105
to post notice of dangerous elevators . . . . .	118	* 38
to prepare sketch of typical plumbing . . . . .	177	118
to prescribe conditions for maintaining boilers and furnaces, steam generators and hot water heaters . . . . .	187	125
to prescribe conditions for certain buildings out- side fire limits . . . . .	77	17
to prescribe conditions for temporary structures . .	13	9
to prescribe conditions for certain walls in steel frame buildings . . . . .	96	27
to prescribe fireproofing of steel in alterations . . .	101	32
to prescribe maximum floor loads, existing build- ings . . . . .	112	36
to submit annual report . . . . .	4	1
to take measures for public safety . . . . .	18	12
to approve drawings for all work . . . . .	18	12
to approve drawings for egress . . . . .	19	12
to approve elevators before used . . . . .	118	* 38
to approve egress for extra large areas . . . . .	76	17
to approve plumbing, chemical laboratories . . . . .	176	117
to approve plumbing, stables . . . . .	177	117
to approve small openings in walls, etc. . . . .	98	31
to approve supports for vent shaft skylight . . . . .	133	52
to fix grade for cutting piles . . . . .	87	21
to decide if piling is necessary . . . . .	82	20
to determine cause and remedy for elevator ac- cidents . . . . .	119	* 38
to record examinations to raise, enlarge, alter or repair . . . . .	6	3
COMMISSIONER, BUILDING. (See BUILDING COMMISSIONER.)		
appointment, qualifications, terms, salary, etc. . . .	3	1
COMMISSIONER, FIRE.		
not affected by this act . . . . .	15	10
COMMISSIONER OF WIRES.		
not affected by this act . . . . .	15	10
provisions of sect. 7 apply to . . . . .	10	7
governed by decisions of Board of Appeal . . . . .	10	7

	Page.	Section.
COMMON NUISANCE.		
General Laws, chap. 139.....	303-304	1-3
COMMONWEALTH OF MASSACHUSETTS.		
buildings of, exempt.....	14	10
COMPOSITE BUILDINGS.		
fire protection and exterior finish of.....	16	11
definition of.....	16	11
COMPRESSION.		
on extreme fiber, bending.....	51	15
COMPRESSION, AXIAL.		
concentric compression on columns, with longitu- dinal reinforcement only.....	51	15
when their length does not exceed ten diameters of core.....	51	15
COMPRESSION MEMBERS.		
cast iron, centrally loaded, safe load.....	37	14
timber, regulation for.....	38	14
timber centrally, loaded safe load.....	38	14
COMPRESSION STRENGTH.		
working stresses, basis for design.....	41	15
COMPUTATIONS.		
for span of beams, girders, trusses.....	39	14
of materials, method of.....	39	14
steel construction, method of.....	66-73	16
methods of.....	39	14
CONCRETE.		
reinforced concrete piling.....	88	21
capping for wood piles.....	85	21
composition and strength.....	30	14
inspection of.....	31	14
inspector to make daily reports.....	31	14
reinforced, composition.....	40	15
specifications to be submitted.....	10	8
meaning of.....	30	14
reinforced, meaning of.....	39	15
use of, immediately after mixing.....	30	14
forms, to remain until safe to remove.....	31	14
inspection of, by inspectors approved by commis- sioner.....	31	14
work to stop at point of low shear.....	40	15
rules for pouring.....	40	15
stresses of.....	33	14
working stresses, one year old, compressive strength of.....	50	15

	Page.	Section.
CONCRETE AGGREGATE.		
composition of.....	28	14
cinders or slag may be used for, when.....	28	14
CONCRETE BEARING PIERS, PLAIN.		
unsupported laterally not to exceed in height six times its least dimension.....	36	14
CONCRETE BEARING WALL, PLAIN.		
unless properly braced not to exceed in height six times its least dimension.....	36	14
CONCRETE BLOCKS.		
how made, compressive strength.....	28	14
CONCRETE BUILDINGS.		
reinforced, may be of supported structural steel or of cast-iron columns.....	48	15
said support to be fireproofed.....	48	15
CONCRETE CINDER SLABS.		
thickness of, span of.....	46	15
CONCRETE COLUMNS.		
to be reinforced, when.....	47	15
maximum effective area of.....	47	15
longitudinal reinforcement of.....	49	15
unsupported height of.....	47	15
CONCRETE CONSTRUCTION.		
live and dead load.....	10	8
CONCRETE FLOORS.		
with hollow blocks, to conform to this act.....	49	15
not to be figured in taking stress.....	49	15
CONCRETE FOOTINGS.		
not to be less than 12 inches in thickness.....	83	20
may be stepped or battered, how.....	83	20
CONCRETE PIERS.		
to be reinforced, when.....	47	15
CONCRETE PILES.		
pre-cast, shall be properly designed and reinforced, longitudinal reinforcing, amount employed.....	88	21
to be thoroughly cured before driving.....	88	21
diameter or lateral dimension of.....	88	21
length of.....	88	21
allowable load on, when driven to ledge or hard pan.....	88	21
pre-cast, to be protected against damage in driving.....	88	21
metal shoe to be provided, when driven to ledge..	88	21

	Page.	Section.
<b>CONCRETE PILES.</b>		
cast in place, how made, placed and spaced.....	88	21
average diameter of such pile.....	88	21
length of such pile.....	89	21
allowable load on such pile, when driven, to ledge or hard pan.....	89	21
general provisions, metal tubes, shall not be con- sidered as reinforcement.....	89	21
when considered as reinforcement.....	89	21
safe load, when not driven to ledge, shall be deter- mined by commissioner.....	89	21
tests, at expense of owner, may be required by commissioner.....	89	21
load test to be made in accordance with regula- tions of commissioner.....	89	21
load in excess of one half test load not allowed...	89	21
tests to be made under supervision of commis- sioner.....	89	21
test results to be filed with commissioner.....	89	21
loads on concrete pile not to exceed thirty tons...	89	21
load, increments of, not to exceed 10,000 pounds each.....	90	21
successive increments, time between.....	90	21
test loads, to be applied at capping grade.....	90	21
concrete piles, capping of, with masonry only allowable.....	90	21
<b>CONCRETE, REINFORCED.</b>		
formulas.....	59-66	15
<b>CONSTRUCTION.</b>		
alteration, inspection and maintenance of build- ings, chap. 284, 1910, building department to enforce building laws in Boston heretofore enforced by district police.....	240	
general.....	77-79	18
permit for.....	4	1
to be supported.....	18	12
<b>CONSTRUCTION, BUILDING. (See SEPARATE SUBJECTS.)</b>		
certain first and second class buildings.....	74-75	17
equivalents may be allowed by commissioner....	11	
<b>CONSTRUCTION, FIREPROOF PARTITIONS.</b>		
to be independently supported at each floor.....	106	33
to be securely fastened to ceilings.....	106	33

	Page.	Section.
<b>CONSTRUCTION, FIREPROOF PARTITIONS.</b>		
to be stiffened with steel uprights, etc.....	106	33
not to rest on wood flooring.....	106	33
need not extend above ceiling of top story, when,	106	33
<b>CONTINUOUS BEAMS.</b>		
subject to other than uniform loads, positive bending moment of.....	45	15
<b>CONTRACTOR.</b>		
to submit calculation sheet.....	10	8
to sign calculation sheets.....	10	8
<b>CONTROL.</b>		
building operations, by licensed builders, chap. 8, R. O. 1914.....	344-347	3-11
of exits, etc., lights in theatres.....	161-163, 169-170	99, 111
of ventilators in theatres.....	157, 171	86, 111
<b>COPLEY SQUARE.</b>		
height of buildings on and near (90 feet), 1898, chap. 452.....	220	1
<b>CORBELS, CHIMNEY.</b>		
restrictions relating to.....	23	13
<b>"CORNER LOT."</b>		
definition of.....	124	42
<b>CORNICE.</b>		
of second-class buildings, material and construc- tion.....	97	29
<b>CORNICE STONE.</b>		
to balance.....	97	29
projection allowed.....	24	13
<b>COTTON, PAPER STOCK, ETC.</b>		
not to be kept in habitable buildings.....	188	126
<b>COURT, MUNICIPAL.</b>		
given jurisdiction in law proceedings.....	192	130
<b>COURTHOUSE, SUFFOLK COUNTY.</b>		
not affected by this act.....	14	10
<b>COURTS, AREA.</b>		
theatres, must have open.....	155, 156	79, 80
<b>COURTS, EQUITY.</b>		
given jurisdiction to enforce provisions of this act.....	192	131
<b>"COURTS," TENEMENT HOUSE.</b>		
drained.....	153	74
definition of.....	124-125	74
general regulations for.....	138	42

	Page.	Section.
<b>"COURTS," TENEMENT HOUSE.</b>		
inner, provision for.....	140	59
not to have roof or skylight.....	138	57
outer, provision for.....	138, 139	58
vent, regulations for.....	140	60
<b>COURTS, ZONING ACT, 1924, chap. 488.</b>		
thirty-five foot district.....	285	11
forty-foot district.....	286	12
sixty-five foot district.....	287	13
eighty-foot district.....	288	14
one hundred fifty-five foot district.....	289	15
<b>CUBICLES.</b>		
public lodging houses, prohibited, General Laws, chap. 140.....	305	33
<b>CURTAIN WALLS.</b>		
in steel frame buildings, thickness.....	96	27
single family dwelling, thickness of.....	94	23
in all other buildings, thickness of.....	94	23
not to exceed in height thirty times its thickness, when more than 20 feet in length.....	94	23
may be less thickness, when.....	94	23
<b>CURTAINS.</b>		
theatres must have fireproof.....	156	84
<b>CUTTING.</b>		
for any purpose, not to reduce strength of part of structure below standard required by law.....	39	14
<b>CUTTING FOR PIPING.</b>		
restrictions concerning.....	39	14
<b>D.</b>		
<b>DAMAGED BUILDINGS.</b>		
commissioner to examine, and make record.....	6	3, 4
may be restored to original condition or conform to rules for new buildings.....	109	35
<b>DAMPPROOFING.</b>		
cellar bottom.....	90	22
<b>DANGEROUS BUILDING.</b>		
to be placarded.....	6	4
<b>DANGEROUS BUILDINGS.</b>		
commissioner to examine, and make record.....	6	3
Gen. Laws, chap. 139.....	303-304	1-3
<b>DANGEROUS BUSINESS.</b>		
in tenements.....	134	54

	Page.	Section.
<b>DANGEROUS OR UNSAFE BUILDINGS.</b>		
to be inspected and owner notified, notice posted,		
owner to secure or remove.....	6, 7	4, 5
power of commissioner.....	7	5
<b>DEAD LOADS.</b>		
weights to be assumed.....	110	36
<b>DECISIONS, BOARD OF APPEAL.</b>		
applicants to have copy.....	9	7
must be in writing.....	9	6
specify variations, etc.....	9	7
<b>DEFECTS.</b>		
timber to be free from.....	32	14
<b>DEFINITION, ZONING ACT, 1924, chap. 488,</b>		
	288	14
dwelling.....	274	1
area of building.....	274	1
hotel.....	274	1
lot.....	275	1
set back.....	275	1
story, half.....	275	1
yard, rear.....	275	1
yard, side.....	275	1
accessory use.....	276	3
accessory use, limitation of.....	277	3
<b>DEFINITIONS.</b>		
certain words relating to tenement houses.....	124-125	42
composite building.....	16	11
first-class building.....	15	11
story of a building.....	17	11
basement.....	17	11
cellar.....	17	11
number of stories of a building.....	17	11
first story of a building.....	17	11
light wall.....	84	21
masonry.....	16	11
piers.....	33	14
(a) solid ledge.....	81	20
(b) shale.....	81	20
(c) hard pan.....	81	20
(d) gravel.....	81	20
(e) sand, compact.....	81	20
(f) sand, loose.....	81	20
(g) sand, medium grained.....	81	20
(h) sand, fine grained.....	81	20



	Page.	Section.
<b>DEFINITIONS.</b>		
(i) hard clay . . . . .	81	20
(j) disintegrated ledge rock . . . . .	81	20
(k) medium clay . . . . .	81	20
(l) soft clay . . . . .	81	20
towns, shall include city, General Laws, chap. 4. .	299	7
city included in town, General Laws, chap. 4. . . .	299	7
<b>DEMOLITION.</b>		
permit for . . . . .	4	1
<b>DENSE.</b>		
definition of — classes of timber . . . . .	32	14
<b>DEPARTMENT, BUILDING.</b>		
organization of . . . . .	3	1
<b>DEPTH.</b>		
roof slabs . . . . .	54	15
<b>DEPUTY BUILDING COMMISSIONER.</b>		
appointments of . . . . .	4	1
powers of . . . . .	4	1
<b>DESCRIPTION.</b>		
to be filed with drawings, showing entire construction, assumptions, calculation of stresses, etc. . . . .	10	8
<b>DESIGN.</b>		
basis of, calculations, to be for working stresses and safe loads. ( <i>See Assumptions A, B, C, D, E</i> ) . . . . .	41	15
<b>DETAILS, STRUCTURAL.</b>		
to be submitted . . . . .	10	8
<b>DIAGONAL AND SHEAR TENSION.</b>		
for beams, with horizontal bars only, with and without web reinforcement . . . . .	51	15
<b>DIAGONAL TENSION IN FOOTINGS.</b>		
shearing stresses, how measured . . . . .	53	15
<b>DILAPIDATED BUILDINGS.</b>		
General Laws, chap. 139 . . . . .	303-304	1-3
<b>DISINTEGRATED LEDGE ROCK.</b>		
definition of . . . . .	81	20
<b>DISTANCE FROM LOT LINE.</b>		
tenement house . . . . .	135-137	55
( <i>See also, yards, inner and outer court</i> ) . . . . .	124-125	42
wooden buildings . . . . .	122-123	40

## DISTRICT — BOUNDARIES OF — ZONING ACT.

1924, chap. 488.

thirty-five foot.....	285	11
forty foot.....	286	12
sixty-five foot.....	287	13
eighty foot.....	288	14
One hundred and fifty-five foot.....	289	15

## DISTRICT A.

height of buildings in, defined, Special Act 1915,  
chap. 333, order of Nov. 2, 1916..... 249-256

## DISTRICT B.

height of buildings in, defined, Special Act 1915,  
chap. 333, order of Nov. 2, 1916..... 249-256

## DISTRICT POLICE.

not to enforce building laws in Boston, 1910,  
chap. 284..... 240 1

## DIVISION OF FLOOR AREAS.

by walls..... 76 17

## DOORS.

stage, in theatres, provision for..... 159 91

in operative buildings, not to be locked, General  
Laws, chap. 149..... 188 126

in tenement houses, existing, rear stairway, to be  
fireproofed, when..... 130 45

on fire escapes to be metal framed, etc..... 21 12

## DOORS IN PARTY WALLS.

size, etc..... 98 31

## "DRAIN."

for cellar floor to have trap, etc..... 186 124

plumbing, definition of..... 172 112

## DRAIN PIPES.

lay out, support, details..... 184 122

## DRAINAGE FITTINGS.

certain, must be galvanized, etc..... 183 121

## DRAINAGE OF COURTS AND YARDS.

tenement house, to satisfaction of board of health, 153 74

## DRAINAGE, STABLE.

commissioner to approve fixtures for..... 177 117

## DRAINS, SURFACE.

must have seal trap and back-water valve..... 186 124

## DRAWINGS.

to be filed before permit is granted..... 10 8

	Page.	Section.
<b>DROPPED PANEL.</b>		
compression in bending allowable.....	54	15
definition of.....	54	15
depth of, below bottom of slab.....	54	15
unit shear allowable.....	54	15
width of, in any direction.....	54	15
<b>DRY HOUSES.</b>		
regulation for 1913, chap. 729.....	245	1
<b>DRYING.</b>		
concrete mixture, prematurely, from high temperature, must be avoided.....	40	15
<b>DUMB-WAITER SHAFTS.</b>		
in tenement houses to be fireproofed.....	133	52
to be of fireproof material.....	116	* 38
<b>DUMB-WAITERS.</b>		
in tenement houses to be sprinklered, when and how,	129	45
<b>DWELLINGS.</b>		
in building limits, may be of third-class when....	14	9
in building limits, may be of composite, when....	13	9
in building limits, to be of not more than two families.....	13	9
in building limits, restriction of.....	13	9
in building limits may be converted into three families, when.....	14	9
<b>DYNAMO.</b>		
application to be published.....	187	125
permit required.....	187	125
<b>E.</b>		
<b>EARTHENWARE TRAP.....</b>	175	117
<b>EGRESS.</b>		
means of, in case of fire.....	19	12
from tenement houses, provision for.....	125	43
stores and storage buildings.....	77	17
outside, window openings to be protected when and how.....	21	12
buildings, not provided with sufficient, may be placarded.....	6	4
requisition for, and service of.....	6	4
commissioner to approve before occupancy.....	19	12
commissioner may vacate, when.....	7	5
for large areas to be approved.....	76	17
outside, projection of.....	25	13

	Page.	Section.
EGRESS.		
for second-class factories and workshops.....	19	12
two means, mercantile buildings.....	76	17
two means, for altered buildings over 33 feet high, existing buildings.....	107	35
	107	35
EIGHTY-FOOT DISTRICT — ZONING ACT.		
1924, chap. 488.....	288	14
yards, courts, set back, area.....	288	14
ELEVATOR CABLES.		
how attached.....	119	* 38
operators, minimum age.....	119	* 38
safety attachment required.....	117	* 38
shaft openings, how protected and to be kept closed.....	116	* 38
shaft, grill under machinery.....	117	* 38
shaft, space between car and walls.....	118	* 38
shaft windows to have bars.....	117	* 38
shaft, fireproof construction.....	116	* 38
shaft, height above roof.....	117	* 32
shaft in tenement houses to be fireproofed.....	133	58
ELEVATOR SHAFTS.		
tenement house, regulations for.....	133	52
no recess in outer wall.....	118	* 38
not more than 4 inches between car and walls....	118	* 38
to be of fireproof material.....	116	* 38
to have skylights.....	117	* 38
in tenement houses to be sprinklered, when and how.....	129	45
ELEVATORS.		
accidents to be reported.....	119	* 38
inspectors may be appointed.....	120	* 38
manufacturers required to test.....	120	* 38
permits for, how obtained.....	119	* 38
to be approved by commissioner before being used.....	118	* 38
unsafe, commissioner to post notice.....	118	* 38
who may operate them.....	118	* 38
for coal or grain, not restricted by building limits,	13	9
freight, construction of shafts and doors.....	117	* 38
freight gates in outside doors.....	118	* 38
freight not above first story without fireproof en- closure.....	116	* 38
freight, to have danger signals.....	117	* 38

	Page.	Section.
<b>ELEVATORS.</b>		
governor and slack cable device required.....	119	* 38
in areas and hallways to have grille.....	116	* 38
in case of accident, commissioner to be notified..	119	* 38
not to be used until approved by commissioner...	118	* 38
permit required and plans to be approved.....	119	* 38
located to give easy access to machinery.....	119	* 38
to be tested by manufacturer in presence of in- specter.....	120	* 38
unsafe, penalty for use.....	118	* 38
to be enclosed, etc., 1914, chap. 782.....	245	6
minors under sixteen not allowed to operate, clean or repair. (See 1920, chap. 298).....	263	1
<b>ELEVATORS AND HOISTS.</b>		
exceptions.....	116	* 38
fireproof enclosures for.....	116	* 38
general regulations for.....	116-120	* 38
<b>EMPLOYEES, BUILDING DEPARTMENT.</b>		
to be appointed by commissioner.....	3	1
to retain positions until removal or discharge. . .	3	1
<b>ENCLOSURES.</b>		
fireproof for elevators and hoists.....	116	* 38
<b>ENFORCEMENT OF BUILDING LAW.</b>		
equity and law courts given jurisdiction.....	192	130
<b>ENFORCEMENT, ZONING ACT.</b>		
1924, chap. 488.....	292	18
<b>ENGINE.</b>		
application to be published.....	187	125
permit required for placing.....	188	125
<b>ENGINEER.</b>		
to submit calculation sheets.....	10	8
<b>ENGINES.</b>		
not to be placed under certain parts of theatres,	169	111
<b>ENLARGED.</b>		
what buildings may be.....	107	35
<b>ENLARGED BUILDINGS.</b>		
application for.....	4	1
to be examined.....	6	3
<b>ENTRANCE HALLS.</b>		
tenement house, construction of.....	132	48
<b>EQUITY COURTS.</b>		
given jurisdiction under this act.....	190	129

	Page.	Section.
ESCALATOR SHAFTS. ( <i>See</i> ELEVATOR REGULATIONS.)		
EXAMINATION OF BUILDINGS.		
dangerous or damaged.....	6	3
under application to alter, etc.....	6	3
under construction, when made.....	5	2
EXAMINERS OF GAS FITTERS.		
not affected by this act.....	15	10
EXCAVATIONS.		
general regulations for.....	79	19
how and by whom protected.....	79	19
responsibility for cost of supporting.....	79	19
retaining walls for.....	79	19
EXCELSIOR, COTTON, ETC.		
not to be kept in habitable buildings.....	188	126
EXEMPTION.		
special, from restriction of height of buildings, chap. 786, 1914.....	246	
EXEMPTIONS.		
from provision of this act.....	14	10
EXHAUST PIPES.		
steam, how connected.....	185	122
EXHAUSTS, STEAM.		
regulations pertaining to.....	184-185	122
EXHIBITION.		
moving pictures, special, Mayor to grant permit, chap. 280, 1913.....	243	
EXISTING BUILDINGS.		
alterations of.....	107	35
height allowed.....	107	35
egress from.....	107	35
habitation, windows, living rooms.....	109	35
habitation, exposure required.....	109	35
EXISTING TENEMENT HOUSES.		
defined.....	124	42
requirements for lighting and ventilation.....	151	71
EXISTING THEATRES.		
general regulations for.....	169-172	111
EXIT LIGHTS.		
assembly rooms, to conform to law of theatres when ordered by Building Commissioner.....	167	107

	Page.	Section.
<b>EXITS.</b>		
in altered habitations, two required . . . . .	107	35
<b>EXITS, ETC., LIGHTS.</b>		
in theatres, control and supply of . . . . .	169-170	111
<b>EXITS, PUBLIC BUILDINGS.</b>		
must conform to regulations for theatres . . . . .	167	107
<b>EXITS, ROOF GARDENS.</b>		
requirements for . . . . .	167	109
<b>EXITS, SIGNS.</b>		
in existing theatres . . . . .	169-170	111
<b>EXITS, THEATRE.</b>		
general regulations for . . . . .	162	99
<b>EXPLOSIVES AND COMBUSTIBLES.</b>		
buildings for manufacturing, require permit . . . . .	188	125
<b>EXPOSURE.</b>		
for altered habitations, amount . . . . .	108	35
for altered habitations, if on corner, may be omitted . . . . .	108	35
in altered habitations, not to apply in stores . . . . .	108	35
in altered habitations, not to be diminished . . . . .	108	35
required for existing buildings altered . . . . .	108	35
to apply to new buildings (except tenements) . . . . .	110	35
required, existing buildings, habitation . . . . .	108	35
<b>EXTERIOR COLUMNS.</b>		
reinforcement, how proportioned . . . . .	48	15
<b>EXTERIOR ISOLATED COLUMNS.</b>		
fire protection of . . . . .	100	32
<b>F.</b>		
<b>FAMILY.</b>		
definition, for tenement houses . . . . .	124	42
<b>FAT BOILING.</b>		
place must be fireproofed . . . . .	134	53
prohibited in tenement houses . . . . .	134	53
exceptions . . . . .	134	53
<b>FEATHERS, RAGS, ETC.</b>		
not to be kept in habitable buildings . . . . .	188	126
<b>FEDERAL BUILDINGS.</b>		
not affected by this act . . . . .	14	10
<b>FEED, HAY, STRAW, ETC.</b>		
not to be kept in habitable buildings . . . . .	188	126

	Page.	Section.
<b>FEES.</b>		
for permits and licenses, authorized, chap. 571,		
1910.....	241	1
collection of, authorized by 1910, chap. 571.....	241	1
for appeals.....	10	7
<b>FENCE.</b>		
erected to annoy, etc., prohibited, General Laws,		
chap. 49.....	300	21
<b>FENCE (SPITE).</b>		
height of allowable, General Laws, chap. 49.....	300	21
a nuisance when, General Laws, chap. 49.....	300	21
<b>FERRULES, CLEAN-OUTS, ETC.</b>		
required diameter and weights of.....	179	121
<b>FIRE.</b>		
means of egress in case of.....	19	12
<b>FIRE COMMISSIONER.</b>		
not affected by this act.....	15	10
<b>FIRE DAMAGE.</b>		
how restored.....	109	35
<b>FIRE DOORS.</b>		
in party walls, size, etc.....	98	31
shafts stores, warehouses.....	74-77	17
<b>FIRE-ESCAPES.</b>		
in mercantile buildings.....	76	17
interior and exterior in tenement houses.....	125-127	43
minimum load.....	111	36
obstruction of, to be removed by, General Laws,		
chap. 148.....	338	39D
stores and storage buildings.....	76	17
in what they shall consist.....	125, 126	43
theatres, outside to be lighted.....	162, 170	99, 111
windows opening on.....	20	12
<b>FIRE PREVENTION.</b>		
<i>see also</i> chap. 320, Acts of 1918.....	397	
order of Fire Marshal, to apply to occupant,		
General Laws, chap. 148.....	323	41
exceptions to above, when alterations become real		
estate, they apply to owner, General Laws,		
chap. 148.....	323	41
tanks for storage of fluids, General Laws, chap,		
148.....	339	54



	Page.	Section.
<b>FIRE PREVENTION.</b>		
tanks, Department of Public Safety to make rules relative to their construction, use and maintenance, General Laws, chap. 148.....	340	55
application of certain sections, General Laws, chap. 148.....	334	2
delegation of powers, General Laws, chap. 148....	334	31
paints or inflammable fluids, General Laws, chap. 148.....	335	32
combustible materials, General Laws, chap. 148..	335	33
combustible refuse, removal of, General Laws, chap. 148.....	336	34
salamanders, use of, General Laws, chap. 148....	336	35
automatic sprinklers, General Laws, chap. 148...	337	36
dry pipes in basements, General Laws, chap. 148,	337	37
penalty, General Laws, chap. 148.....	337	38
additional powers given Fire Marshal, General Laws, chap. 148.....	338	39
(a) relative to portable fire extinguishers.....	338	39
(b) relative to accumulation of rubbish, etc....	338	39
(d) egress, obstacles to.....	338	39
(e) relative to prevention of fires.....	338	39
(h) chimney flues and vent pipes, cleaning of...	338	39
(i) roof skylights, safe guards over.....	338	39
(k) signs, etc., on roofs.....	338	39
(m) defining classes of buildings to be sprinkled,	338	39
<b>FIRE PREVENTION LAW.</b>		
General Laws, chap. 148.....	334-340	
<b>FIRE PROTECTION.</b>		
general requirements for.....	98-101	32
of main reinforcement in floor slabs.....	41	15
in beams, girders, columns and walls.....	41	15
all structural metal to be fire protected.....	101	32
to consist of:		
(a) concrete.....	98	32
(b) terra cotta.....	99	32
(c) brick work.....	99	32
(d) other materials.....	99	32
thickness of:		
on columns carrying masonry.....	99	32
on columns carrying floor.....	99	32
on columns carrying roof.....	99	32
on beams carrying masonry.....	100	32

	Page.	Section.
<b>FIRE PROTECTION.</b>		
thickness of:		
on girders carrying masonry . . . . .	100	32
on trusses carrying masonry . . . . .	100	32
on beams carrying roof or floors . . . . .	100	32
on girders carrying roof or floors . . . . .	100	32
on trusses carrying roof or floors . . . . .	100	32
on beams deeper than 15 inches . . . . .	100	32
on beams having a flange width of more than 7 inches . . . . .	100	32
on lugs, brackets, braces, etc. . . . .	100	32
about isolated columns, exterior . . . . .	100	32
plaster on metal lath not a fire protection . . . . .	100	32
metal lath and plaster, when used as suspended ceilings . . . . .	100	32
metal lath and plaster, total thickness . . . . .	100	32
pipes, wires, cables, or other material, not to be embedded in fireproofing of structural members,	100	32
exemptions:		
(a) where wood is permitted for same purpose in lieu of metal . . . . .	101	32
(b) structural metal which faces on enclosed spaces, etc. . . . .	101	32
(c) lintel angles under stone or brick . . . . .	101	32
(d) buildings built of better class than required by law . . . . .	101	32
(e) metal work in non-bearing partitions . . . . .	101	32
metal work for furrings . . . . .	101	32
metal work to support finish . . . . .	101	32
metal work for stair construction . . . . .	101	32
suspension rods for balconies . . . . .	101	32
steel work for theatre stages . . . . .	101	32
steel work for fly galleries . . . . .	101	32
steel work for rigging lofts . . . . .	101	32
(f) metal other than columns, carrying only roof loads, ceilings or suspended balconies not over 8 feet wide . . . . .	101	32
suspended ceiling, construction of . . . . .	101	32
in alterations, to be made satisfactory to com- missioner . . . . .	101	32
metal guards or wood may be substituted for, when liable to injury . . . . .	102	32

	Page.	Section.
<b>FIRESTOPPING.</b>		
between stair stringers .....	102	32
in alteration work in first story and basement, mercantile.....	107	35
in studding and furring.....	102	32
of bearing partitions.....	102	32
of floors.....	103	32
to be approved by commissioner.....	103	32
second-class buildings, to be firestopped.....	102, 103	32
in second-class buildings.....	102, 103	32
to fill all openings where applied.....	102	32
rat refuge, spaces creating same prohibited.....	103	32
third-class buildings to be firestopped.....	102, 103	32
in third-class buildings.....	102	32
roof, stairways, chimneys.....	102	32
how applied.....	102	32
<b>FIRE TEST.</b>		
method of determining.....	12	8
<b>FIRE WALLS.</b>		
above roof.....	97	28
<b>FIREPLACE.</b>		
construction.....	97	30
<b>FIREPROOF ENCLOSURES.</b>		
for shafts in first-class warehouse.....	75	17
<b>FIREPROOF PARTITIONS.</b>		
support of.....	104	33
how to be constructed.....	104, 105	33
in first-class buildings.....	104, 105	33
to be constructed of following materials:		
(a) brick, cement mortar.....	104	33
(b) concrete, 1-3-6, not less than 4 inches thick, 3 inches when reinforced with steel,	104	33
(c) cinder concrete, 1-3-6, not less than 5 inches thick and 4 inches when reinforced with steel.....	105	33
(d) hollow terra cotta blocks, 3 inches thick..	105	33
(e) hollow concrete blocks, 3 inches thick.....	105	33
(f) solid or hollow gypsum blocks, 3 inches thick.....	105	33
(g) metal lath on steel studding Portland cement mortar, 2 inches thick for solid partitions, 3 inches for hollow partitions,	105	33

	Page.	Section.
<b>FIREPROOF PARTITIONS.</b>		
to be constructed of following materials:		
(h) material approved by commissioner when in conformity with required fire test. . . . .	105	33
pressed metal and glass, at discretion of com- missioner. . . . .	105	33
temporary partitions of wood and glass within rooms inclosed by fireproof walls. . . . .	105	33
partitions in excess of 15 feet in height to be increased in thickness 1 inch for every addi- tional 8 feet. . . . .	105	33
support of. . . . .	106	33
tests of, method to be employed. . . . .	106	33
<b>FIREPROOF STAIRWAYS.</b>		
in mercantile buildings. . . . .	75-76	17
<b>FIREPROOF WINDOWS.</b>		
in mercantile and manufacturing buildings. . . . .	116	37
<b>FIREPROOFING.</b>		
not to be reduced. . . . .	11	8
regulations for. . . . .	98-101	32
of beams, girders, columns, etc. . . . .	98-101	32
of stair halls in tenements. . . . .	131	46
of steel and iron in alterations, as approved by commissioner. . . . .	101	32
under self-centering reinforcements. . . . .	47	15
flush ceiling, same as for slabs. . . . .	50	15
suspended metal lath plastered ceiling, same as for slabs. . . . .	50	15
<b>FIRST-CLASS BUILDING.</b>		
definition of. . . . .	15	11
warehouse to have fireproof enclosures and auto- matic doors. . . . .	75	17
what buildings to be. . . . .	74	17
area, restriction of, how and when. . . . .	75	17
division walls required, when. . . . .	76	17
area, limited to 10,000 square feet. . . . .	76	17
area, may exceed 10,000 square feet, when. . . . .	76	17
foundations. . . . .	80-83	20
tenement houses, basement to be sprinklered, when. . . . .	129	45
<b>FIRST STORY OF A BUILDING.</b>		
definition of. . . . .	17	11

	Page.	Section.
FITTINGS.		
must be galvanized, etc.....	183	121
"FIXTURE."		
plumbing, meaning of term.....	172	112
FLAT SLABS.		
floor slabs supported upon columns, etc.....	53	15
FLOOR ANCHORS.		
floor anchors or ties.....	20	12
FLOOR AND ROOF JOISTS.		
minimum bearing.....	106	34
on corbels or hangers.....	106	34
splayed at ends.....	106	34
FLOOR AREAS.		
undivided, maximum.....	76	17
FLOOR JOISTS.		
distance between ends.....	23	13
distance from chimney.....	23	13
FLOOR LOADS. (See LIVE LOADS.)		
for existing buildings, commissioner to fix.....	112	36
minimum.....	111	36
reduction for columns, piers, walls and founda- tions.....	113	36
to be posted.....	112	36
least capacity for.....	111	36
FLOOR OPENINGS.		
framing of.....	46	15
to be kept closed.....	117	38
FLOOR SLABS.		
main reinforcement to be fire protected.....	41	15
FLOOR TILES, TERRA COTTA.		
average strength, how computed.....	27	14
compressive strength of.....	27	14
to be tight to prevent loss of material in pouring,	40	15
FLOOR TIMBER.		
not to be within 2 inches of chimney.....	23	13
FLOORING DURING CONSTRUCTION.		
regulations for.....	124	41
FLOORS.		
how fire stopped in second and third class con- struction.....	103	32
security of, requirements for floor ties.....	20	12

	Page.	Section.
<b>FLOORS.</b>		
small openings in, to be approved by commissioner.....	98	31
theatre, required levels of.....	155	82
stage, requirements for.....	156	85
to be constructed to carry loads proposed safely..	111	36
<b>FLOORS OF EXISTING BUILDINGS.</b>		
commissioner to prescribe maximum loads for....	112	36
<b>FLOORS, WOODEN.</b>		
furnaces and boilers not to be placed on.....	23	13
<b>FLUES, CHIMNEY.</b>		
height of.....	18	12
lining required for certain.....	19	12
<b>FLUES, VENTILATING.</b>		
must be of incombustible material.....	21	12
<b>FLUSH CEILING.</b>		
fireproofing, same as for slabs.....	50	15
<b>FOOTING LOADS.</b>		
relative to.....	83	20
full dead loads and figured live loads to be provided for in determining required area for footings.....	83	20
<b>FOOTING STONE.</b>		
requirements for.....	83	20
<b>FOOTINGS.</b>		
bending moment, rectangular, isolated columns..	53	15
punching shear in, columns, effective area to resist.....	53	15
diagonal tension in.....	53	15
symmetrical concentric columns, to be designed, how.....	53	15
foundations, relative to.....	80-83	20
of foundation walls or piers, to consist of.....	83	20
of wood, when allowable.....	83	20
concrete, to be not less than 12 inches in thickness.....	83	20
<b>FOOTINGS, GENERAL.</b>		
symmetrical, concentric column footings, to be designed for punching shear, diagonal tension and bending moment.....	53	15
<b>FORMS FOR CONCRETE.</b>		
when and how to be removed.....	30	14

	Page.	Section.
FORMULAS, REINFORCED CONCRETE CON- STRUCTION.		
1. Standard notation:		
(a) rectangular beams.....	60	15
(b) T-beams.....	60	15
(c) beams reinforced for compression.....	60	15
(d) shear, bond and web reinforcement... ..	60	15
(e) columns.....	61	15
2. Formulas:		
(a) rectangular beams:		
1, position of neutral axis.....	61	15
2, arm of resisting couple.....	61	15
3, 4, fiber stresses.....	62	15
5, steel ratio, for balance reinforcement,	62	15
(b) T-beams:		
Case I. When the neutral axis lies in the flange, use the formulas for rectangular beams.....	62	15
Case II. When the neutral axis lies in the stem.		
The following formulas neglect the com- pression in the stem:		
6, position of neutral axis.....	64	15
7, position of resultant compression....	64	15
8, arm of resisting couple.....	63	15
9, 10, fiber stresses.....	63	15
For approximate results the formulas for rectangular beams may be used. The following formulas take into account the compression in the stem; they are recommended where the flange is small compared with the stem:		
11, position of neutral axis.....	63	15
12, position of resultant compression....	63	15
13, arm of resisting couple.....	63	15
14, 15, fiber stresses.....	63	15
(c) beams reinforced for compression:		
16, position of neutral axis.....	64	15
17, position of resultant compression....	64	15
18, arm of resisting couple.....	64	15
19, 20, 21, fiber stresses.....	64, 65	15
(d) shear, bond and web reinforcement:		
22, 23, for rectangular beams.....	65	15

	Page.	Section.
FORMULAS, REINFORCED CONCRETE CONSTRUCTION.		
2. Formulas:		
stresses in web reinforcement:		
24, vertical web reinforcement.....	65	15
25, bars bent up, horizontal and web members inclined.....	65	15
26, 27, T-beams.....	66	15
(e) columns:		
28, total safe load.....	66	15
29, 30, unit stresses.....	66	15
FORTY-FOOT DISTRICT — ZONING ACT, 1924, chap. 488.		
yards, courts, set-back area.....	286	12
"FOUNDATION."		
definition of.....	16	11
FOUNDATION PIERS.		
may be used to carry foundation down to ledge, etc.....	83	20
FOUNDATIONS.		
construction or alteration of, requires permit.....	18	12
depths below frost.....	80, 120	20, 39
for first and second class buildings, materials.....	82	20
for wooden buildings, materials and thickness....	120	39
metal in, protected with concrete, etc.....	90	22
metal work in, protected from dampness.....	90	22
not to overload soil.....	80	20
of rubble stone, when used.....	82	20
walls, thickness.....	93	23
rust protection.....	41	15
relative to.....	80	20
footings of.....	80	20
when laid in freezing weather, to be adequately protected.....	80	20
satisfactory bearing material, means.....	80	20
maximum allowable bearing value of, as follows:		
solid ledge rock, 100 ton per square foot.....	80	20
shale and hardpan, 10 tons per square foot....	80	20
gravel and compact sand, 6 tons per square foot,	80	20
hard, yellow clay, 6 tons per square foot.....	80	20
sand, coarse or medium, dry or wet, 5 tons per square foot.....	81	20



FOUNDATIONS.

maximum allowable bearing value of, as follows:		
hard, blue clay, mixed or unmixed with sand, 5 tons per square foot.....	81	20
disintegrated ledge rock, 5 tons per square foot,	81	20
medium stiff or plaster clay, mixed or unmixed with sand, 4 tons per square foot.....	81	20
fine grained dry sand, 4 tons per square foot...	81	20
fine grained wet sand (confined), 3 tons per square foot .....	81	20
soft clay protected against lateral displacement, 2 tons per square foot.....	81	20
first and second class buildings (brick, stone or concrete), thickness of.....	93	23
when below grade, how figured.....	82	20
stone, to be square split.....	82	20
rubble, thickness of.....	82	20
walls, to be properly bonded.....	83	20
piling. ( <i>See</i> Pile Foundations, section 21.)		
steel grillage, relative to.....	83	20
wooden buildings (third-class).....	120	39

FRAME OF WOODEN BUILDING.

described.....	121	39
----------------	-----	----

FRAMING.

wood buildings (third-class).....	121	39
all parts to be of sufficient strength.....	121	39
wall girts to be not less than 4 inch by 6 inch....	121	39
ledger boards, not permissible when.....	121	39
studs not over 20 inches on centers.....	121	39
all angles between partitions and partitions and walls to be blocked strongly to form solid corners,	121	39
posts to be securely braced.....	121	39
ledger boards, space behind, to be filled.....	121	39
braces to repeat in each story.....	121	39
braces shall not be smaller than 3-inch studding.	121	39
wall girts to be framed to posts and pinned when,	121	39
to be securely nailed, or framed or ironed together,	121	39

FREEZING.

precautions to be taken to prevent.....	40	15
---	----	----

FURNACE.

distance below ceiling.....	103	32
permit required for setting.....	4, 187	1, 125

## FURNACE AND SMOKE PIPES.

furnace, top of, to be 12 inches at least below ceiling.....	103	32
smoke pipes to be 12 inches below ceiling.....	103	32
ceilings over, to be protected.....	103.	32

## FURNACE PIPES.

to be kept 1 inch from woodwork.....	24	13
--------------------------------------	----	----

## FURNACES AND BOILERS.

commissioner may prescribe conditions for maintenance.....	187	125
public hearings on.....	187	125
not to be placed on wooden floors.....	23	13
under certain parts of theatres.....	165, 169, 104,	111

## FURRING.

distance from chimney.....	23	13
fire stopped, where and how.....	102	32
not within 1 inch of chimney.....	23	13

## FURTHER REQUIREMENTS.

for strength determined by commissioner.....	12	8
--	----	---

## G.

## GARAGES.

erection and maintenance of.		
chap. 342, 1911.....	242	1-4
chap. 259, 1912.....	242	1
chap. 577, 1913.....	243-245	1-5
chap. 115, 1918, Special Act.....	37	1
cast-iron columns, use of, in prohibited.....	37	14
to be first-class construction, 1911, chap. 342.....	242	1
meaning of (contains five or more cars), 1911, chap. 342.....	242	2
exempt, Newbury street 337, chap. 259 of 1912....	242	1
license for, Street Commissioners, 1913, chap. 557,	243	1
metal, regulations for, 1918 Special Act, chap. 115,	260	1
and chap. 577 of 1913, as amended by chap. 316 of 1922.....	243	
as amended by chap. 42, of 1927.....	380	

## GARBAGE.

receptacle in altered habitations.....	108	35
--	-----	----

## GARBAGE AND ASHES.

tenement-house, receptacles for.....	153	75
garbage.....	190	128

	Page.	Section.
GARDENS, ROOF. ( <i>See</i> ROOF GARDENS.)		
above theatres, provision for.....	167	108
GAS FITTERS, BOARD OF EXAMINERS OF.		
not affected by this act.....	15	10
"GAS FITTING."		
definition of.....	17, 220	11
municipal court given jurisdiction in law cases....	192	130
permit for.....	210	7
1897, chap. 265.....	207-212	1-14
license required.....	207	1
journeyman means.....	207	1
examination required.....	208	2
qualifications required.....	208	2
Board of Examiners of.....	208	3
examinations, times and places for holding same..	208	4
examinations, practical knowledge required.....	208	4
license, board to issue.....	208	4
license, fees for same.....	208	4
inspectors, duties, compensation, removal.....	209	5
license number, to be displayed at place of business	210	6
application for, to be filed.....	210	7
permit for, required.....	210	7
timbers, beams, girders, not to be cut into.....	211	8
meter to be removed only by Gas Company.....	211	8
gas brackets.....	211	9
gas fixtures, etc., Board of Health to inspect.....	211	10
penalty.....	211	11
annual report on.....	212	12
repeals.....	212	13
Revised Regulations:		
authorized by 1897, chap. 265.....	212	
took effect October 1, 1898.....	212	
amended August 16, 1899, March 12, 1918 —		
July 9, 1923 — January 8, 1924.....	212	
leaks, repair of, notice.....	212	1
pipes or fitting not to be concealed until ap-		
proved.....	213	2
pipe not to be subjected to strain.....	213	3
outlets, burners, number of.....	213	4
pipes to be properly protected.....	213	5
swing brackets.....	213	6
stop-pins.....	213	7
gas fitters, cement prohibited.....	213	8

## "GAS FITTING."

## Revised Regulations:

inside service to be tested.....	214	9
service pipe (inside) to be tested.....	214	9
service pipe to have main cock.....	214	10
main cock required on service pipes.....	214	10
final test to be made by gas fitter.....	214	11
final tests to be made in presence of inspector..	214	11
gas fitter to make final test in presence of inspector.....	214	11
material of gas pipes.....	214	12
gas pipes, material of.....	214	12
brass nipples.....	214	13
risers.....	215	14
scale for piping.....	215	15
piping, scale for.....	215	15
brass piping used outside finish is a fixture....	215	15
outlets and risers, to be capped, when.....	215	16
outlets for fixtures.....	215	17
shields, when required.....	215	18
brass tubing, when used for arms or fixtures...	216	19
threads on brass pipe.....	216	19
rope or square tubing.....	216	19
cast fittings.....	216	20
plugs of all cocks.....	216	20
stems of fixtures.....	216	20
L-burner cocks when not allowed. ....	216	20
outlets for gas ranges....	216	21
gas ranges, outlets for.....	216	21
pipes to be laid above timbers....	216	22
second-hand gas pipe not allowed.....	217	23
drops or outlets.....	217	24
outlets, how fastened.....	217	25
weight of gas pipes, pounds per foot.....	217	26
gas pipe, weight of, pounds per foot.....	217	26
gas pipe not to be laid within 6 inches of electric wire.....	218	27
spark or self-lighting burners to be tested with mercury test.....	218	28
gas engines.....	218	29
exhaust pipes.....	218	29
diaphragms and bags.....	218	29
pipes connecting gas engines, size of.....	218	29

## "GAS FITTING."

## Revised Regulations:

gas not to be turned on until piping and fixtures approved.....	219	30
connections with gas appliances.....	219	31
rubber or flexible tubing not allowed.....	220	32
hosecock and independent fitting.....	220	33
definition of, 1907, chap. 550.....	17, 220	11

## GAS PIPE OUTLETS.

theatre, two required.....	162	99
inspection of.....	162	99

## GATES IN STAGE STANDPIPES.

of theatres.....	165, 171, 104, 111	
------------------	--------------------	--

## GENERAL RESIDENCE DISTRICT — ZONING ACT.

1924 — chap. 488.....	277	4
-----------------------	-----	---

## GENERAL BUSINESS DISTRICT — ZONING ACT.

1924 — chap. 488.....	277	4
-----------------------	-----	---

## GIRDER PLATE.

flanges, proportion of.....	69	16
stiffeners, to be provided, when.....	69	16
intermediary stiffeners.....	69	16

## GIRDERS.

computation of, for span of.....	39	14
main reinforcement, to be fire-protected.....	41	15

## GIRDERS AND BEAMS.

relating to.....	69	16
------------------	----	----

## GONGS.

in hotels, lodging houses, etc., when required, General Laws, chap. 143.....	323	44
--	-----	----

## GRAIN ELEVATORS.

not affected by building limits.....	13	9
require permit for use.....	187	125

## GRANITE.

stresses of.....	86	14
------------------	----	----

## GRAVEL.

definition of.....	81	40
maximum allowable bearing value in foundation, run of bank, use of, when allowed.....	80	20
	29	14

## GRILLAGE BEAMS.

how to be figured for each kind of stress.....	39	14
--	----	----

## GROUT.

stresses for.....	36	14
-------------------	----	----

	Page.	Section.
<b>H.</b>		
<b>HABITABLE BUILDINGS.</b>		
combustible materials not to be housed in.....	188	126
<b>HABITATION.</b>		
main staircase.....	128	45
first story or basement may be used for mercantile purposes.....	74	17
when to be first, second or third class.....	74	17
second-class building, height of and area of.....	74	17
basement or first story may be used for store....	74	17
<b>"HALL, PUBLIC."</b>		
tenement house, defined.....	125	42
requirements for.....	128	45
<b>"HALL, STAIR."</b>		
tenement house, defined.....	125	42
construction of.....	131	46
<b>HALLS.</b>		
capacity of.....	166	105
general requirements for.....	165-167	105
must be fireproof, when.....	166	105
moving picture exhibition in, Mayor to grant permit for, chap. 280, 1913.....	243	1
<b>HALLS, ENTRANCE.</b>		
tenement house, construction of.....	132	48
<b>HALLS OR ASSEMBLY ROOMS.</b>		
aisles to be kept clear.....	167	105
arrangement of seats, passages, etc.....	166	105
buildings altered, for, conform to law.....	166	105
construction, requirements.....	165-167	105
exits, same as for theatres.....	167	107
seating capacity, how reckoned.....	166	105
seats secured during performances.....	166	105
<b>HANDRAILS.</b>		
theatre stairs, requirements for.....	164	102
<b>HANGERS OR STIRRUP.</b>		
for trimmers, headers, floor beams.....	20	12
<b>HARBOR LINES.</b>		
South bay, 1921, chap. 137.....	265	1
<b>HARD BRICK.</b>		
ultimate compression strength.....	27	14
<b>HARD CLAY.</b>		
definition of.....	81	20

	Page.	Section.
<b>HARDPAN.</b>		
definition of . . . . .	71	20
maximum allowable bearing value in foundations, . . . . .	80	20
<b>HAY, STRAW, ETC.</b>		
not to be kept in habitable buildings. . . . .	188	126
<b>HAZARDOUS BUILDINGS.</b>		
appliances for power and heat. . . . .	187	125
hearings on boilers and furnaces for. . . . .	187	125
must have permits. . . . .	187	125
application, hearings, etc. . . . .	187	125
<b>HEADERS AND TRIMMERS.</b>		
rules for. . . . .	20	12
<b>HEADERS, WOODEN.</b>		
requirements for. . . . .	20	12
<b>HEALTH, BOARD OF.</b>		
may limit number of occupants in any building. . . . .	189	128
not to be affected by this act. . . . .	15	10
powers of, defined. . . . .	180, 190	128
<b>HEARINGS, PUBLIC.</b>		
hazardous buildings and appliances for power and heat. . . . .	187	125
<b>HEARTHES.</b>		
size and how supported. . . . .	97	30
<b>HEARTHES AND PIERS.</b>		
regulations for. . . . .	97	30
<b>HEAT AND POWER.</b>		
appliances for, in hazardous buildings. . . . .	187-188	125
<b>HEATING APPARATUS.</b>		
theatre, under auditoriums, regulations for. . . . .	165	104
<b>HEATING FURNACES.</b>		
ceiling over to be wire lathed and plastered. . . . .	103	32
hot air pipes, to be 1 inch from woodwork. . . . .	103	32
top, of, to be 12 inches below ceiling. . . . .	103	32
(Also see FURNACES.)		
<b>HEIGHT.</b>		
of altered buildings not to be increased. . . . .	107	35
of buildings to width of street. . . . .	77	18
of buildings, special acts governing. . . . .	79	18
maximum, for all buildings. . . . .	77	18
existing buildings. . . . .	107	35
<b>HEIGHT OF BUILDINGS.</b>		
height limit (70 feet) special exemptions, 1905, chap. 383. . . . .	232-238	

## HEIGHT OF BUILDINGS.

height limit, no limitation of, 1905, chap. 383, as amended by chap. 174 of 1922.....	232-238	
on street exceeding 64 feet in width, 1905, chap. 383, order of July 21, 1905.....	232-238	
parkway restriction, 1905, chap. 383, order of July 21, 1905.....	232-238	
eighty-foot exception, 1905, chap. 383, order of July 21, 1905.....	232-238	
district B may be 125 feet, when, 1905, chap. 383, order of July 21, 1905.....	232-238	
Mechanic Arts High School, 1905, chap. 383, order of November 30, 1905.....	232-238	
Rutherford avenue (100 feet), 1907, chap. 416....	238	1
Washington street, corner Lovering place, 1914, chap. 786.....	246	1
district A, extension of, 1915, Special Act, chap. 333.....	249-256	
district A, order November 2, 1916, East Boston (1).....	251	
district A, order November 2, 1916, Charlestown (2).....	252	
district A, order November 2, 1916, Boston proper (3).....	253	
district A, order November 2, 1916, Roxbury (3).....	253	
district A, order November 2, 1916, Dorchester (3).....	254	
district A, order November 2, 1916, South Boston (3).....	254	
district B, order of November 2, 1916.....	250	
limitation of, Dartmouth street, Trinity place, Stuart street, 1920, chap. 455.....	263	1
definition of.....	16	11
regulations for.....	77	18
Copley square.		
chap. 452, 1898.....	220	
vicinity of State House, limited.		
chap. 457, 1899.....	222	
on Beacon street and Bowdoin street.		
chap. 543, 1902.....	223-225	
in Boston.		
chap. 333, 1904.....	226-232	
chap. 383, 1905.....	232-238	
on Rutherford avenue.		
chap. 416, 1907.....	238	



	Page.	Section.
<b>HEIGHT OF BUILDINGS.</b>		
special exemption.		
chap. 786, 1914.....	245	
special commission appointed to determine and revise boundaries of districts A and B, Special Act, 1915, chap. 333.....	249-256	
on Parkways, order of July 21, 1905.....	236	
height limit, district A, 1904, chap. 333.....	249-256	
height limit, district B, 1904, chap. 333.....	249-256	
exceptions, 1904, chap. 333.....	249-256	
<b>HEIGHT OF WOODEN BUILDING.</b>		
if altered not to be increased in some cases.....	22	13
<b>HOIST AND ELEVATORS.</b>		
fireproof enclosures for.....	116	* 38
exceptions.....	116	* 38
<b>HOLLOW BLOCK WALLS:</b> .....	94	23
<b>HOLLOW STEEL COLUMN.</b>		
circular, filled with concrete, load allowance.....	48	15
<b>HOSPITALS.</b>		
registration of, 1919, Special Act, chap. 32.....	260	1
construction, alteration and maintenance of, 1919, Special Act, chap. 163.....	261	
first-class.....	261	1
second-class.....	261	1
third-class.....	261	1
shafts in, to be sprinklered.....	261	2
stairs and halls to be kept lighted.....	262	3
shafts to be enclosed in basement.....	262	4
registration required.....	262	7
<b>HOT AIR PIPES.</b>		
to be not less than 1 inch from woodwork.....	24	13
<b>HOTELS.</b>		
watchman, lights, gongs, etc., in, General Laws, chap. 143.....	323	44
<b>HOT WATER HEATERS.</b>		
commissioner may prescribe conditions for mainte- nance.....	187	125
<b>HOUSES. Tenement. (See TENEMENT HOUSES.)</b>		
<b>l.</b>		
<b>ILLEGAL STRUCTURES.</b>		
may be ordered removed by Superior Court.....	191	129
use of, maintenance of, may be restrained by Superior Court.....	191	129

	Page.	Section.
INDUSTRIAL DISTRICT — ZONING ACT.		
1924, chap. 488.....	280	7
INJUNCTION.		
Superior Court may issue, to restrain, maintenance or use of illegal structures.....	191	129
INNER COURT.		
defined.....	125	42
for tenement house, size.....	140	59
INSPECTION.		
of concrete work.....	31	14
alterations, construction and maintenance of buildings, chap. 284, 1910.....	240	
theatres and public halls, General Laws, chap. 143, sect 36.....	320	
(See Requirement under section 14).....	40	15
INSPECTION, BUILDING.		
commissioner, or inspectors, to examine all build- ings being constructed or altered.....	5	2
INSPECTION OF CONCRETE.		
to be done by inspector approved by commis- sioner.....	31	14
INSPECTION, PLUMBING.		
work must be approved.....	174	116
INSPECTOR.		
of concrete to be approved by commissioner.....	31	14
to be on work while concrete is being mixed and poured.....	31	14
to make daily report of progress and condition of work.....	31	14
INSPECTORS, BUILDING.		
appointed by commissioner.....	3	1
may enter any building or premises.....	192	129
qualifications required of.....	3	1
to examine all buildings for which permits have been requested.....	6	3
to examine dangerous and damaged buildings....	6	3
to examine unsafe or dangerous buildings.....	6	4
to make record of violations.....	5	2
to post notice on unsafe or dangerous buildings..	6	4
to post notice of violations.....	6	4
to post notice of insufficient egress.....	6	4

	Page.	Section.
INSPECTORS, ELEVATOR.		
commissioner may appoint.....	120	* 38
INTAKE.		
defined.....	125	42
for tenement houses, size, etc.....	141	61
in tenement houses, size and skylight over.....	133	52
tenement houses, provision for.....	141	61
INTERIOR BAYS.		
formula, panels.....	53	15
INTERIOR COLUMNS.		
least dimensions, supporting flat slabs.....	58	15
IRON COLUMNS.		
wrought circular.....	48	15
IRON, WROUGHT AND CAST.		
strength of.....	31	14
ISOLATED COLUMNS.		
on exterior of buildings, protection of.....	100	32
<b>J.</b>		
JAIL, SUFFOLK COUNTY.		
not affected by this act.....	14	10
JOINT BOLTS.		
where required.....	20	12
JOINTS.		
how formed, between concrete.....	30	14
JOISTS.		
floor and roof, in walls of second-class buildings..	106	34
JURISDICTION.		
given courts of equity.....	190	129
law.....	192	130
<b>K.</b>		
KITCHENETTE.		
least dimension of.....	21	12
in tenement houses to be sprinklered, when and how.....	129	45
KNOTS.		
timber to be free from.....	32	14
<b>L.</b>		
LABORATORIES, CHEMICAL.		
plumbing of, to be approved by commissioner....	176	117
LADDERS.		
to roof scuttles.....	18, 127	12, 44

	Page.	Section.
LANDINGS, STAIR.		
theatre, required dimensions of.....	163	101
LAW COURTS.		
given jurisdiction under this act.....	192	130
LAWS.		
certain former acts applicable.....	79	18
LEAD PIPES.		
size and weight, plumbing.....	178	121
LEADERS.		
capacity required.....	185	122
how connected.....	186	124
where not to discharge.....	185	122
LEADERS, ROOF.		
projection of.....	185	122
requirements for.....	186	124
"LEAKS, REPAIR OF."		
plumbing, definition of.....	172	112
LEDGE ROCK.		
disintegrated, definition of.....	81	20
disintegrated, maximum allowable bearing value in foundation.....	80	20
solid, maximum allowable bearing value in foundation.....	80	20
LEDGE, SOLID.		
definition of.....	81	20
LEDGER, BOARDS.		
prohibited when.....	121	39
LESSEE UNDER RECORDED LEASE.		
deemed owner of building or structure.....	189	27
LESSEES.		
when responsible for maintenance.....	189	127
LEVELLERS.		
block granite on piles.....	85	21
LICENSED BUILDERS.		
to control building operations, chap. 8, R. O., 1914, as amended.....	344-347	
LICENSES.		
fees for, authorized, chap. 571, 1910.....	241	
plumbers, chap. 76, acts of 1928.....	394	
LICENSING.		
theatres and public halls, 1907, chap. 463.....	239	

	Page.	Section.
<b>LIGHT AND VENTILATION.</b>		
of existing tenement houses.....	150	70
of rooms in tenement houses.....	142	63
of stair halls in tenement houses.....	144	66
tenement house, provision for.....	135-137	55
<b>LIGHT SHAFT.</b>		
in tenement houses to be sprinklered, when and how.....	129	45
<b>LIGHT SHAFTS.</b>		
of fireproof material.....	116	*38
<b>LIGHT WALL.</b>		
definition of.....	84	21
<b>LIGHTING, TENEMENT HOUSE.</b>		
board of health may regulate.....	189	128
<b>LIGHTS.</b>		
in hotels, lodging houses, etc., when required, General Laws, chap. 143.....	323	44
<b>LIGHTS, EXIT.</b>		
public buildings must conform to theatre require- ments.....	167	107
<b>LIME.</b>		
composition of, allowable.....	29	14
<b>LIME MORTAR.</b>		
composition of, allowable.....	29	14
<b>LIMESTONE.</b>		
stress of.....	36	14
<b>LIMITS.</b>		
building, outline of, chap. 41, R. O. 1914.....	347	
<b>LINING, CHIMNEY.</b>		
when required.....	19	12
<b>LINTELS.</b>		
on extension of buildings, protection of.....	101	32
<b>LINTELS, CAST-IRON.</b>		
regulations for use of.....	32	14
to be not less than $\frac{3}{4}$ inch in thickness.....	32	14
not to be used for spans over 6 feet.....	32	14
<b>LIVE LOADS.</b>		
for various buildings.....	111	36
<b>LOAD TEST.</b>		
to be $\frac{1}{2}$ of total load, when.....	12	8
commissioner may require.....	12	8

Page. Section.

## LOAD TEST.

owner to make at his expense.....	12	8
how determined, in exceptional cases.....	12	8

## LOADS.

slabs, supported on four sides, distribution of....	46	15
proportion of, of beams, supporting rectangular slabs.....	46	15

*dead loads:*

to consist of weight of walls, floors, roofs and permanent partitions.....	110	36
---	-----	----

## weights to be assumed per cubic foot pounds:

beech, 42 pounds.....	110	36
birch, 42 pounds.....	110	36
brickwork, 120 pounds.....	110	36
concrete, cinder, structural, 108 pounds.....	110	36
concrete cinder, floor filling, 96 pounds.....	110	36
concrete, stone, 144 pounds.....	110	36
Douglas fir, 36 pounds.....	110	36
granite, 168 pounds.....	110	36
granolithic surface, 144 pounds.....	110	36
limestone, 150 pounds.....	110	36
maple, 42 pounds.....	110	36
marble, 168 pounds.....	110	36
oak, 48 pounds.....	110	36
pine, southern yellow, 42 pounds.....	110	36
sandstone, 144 pounds.....	110	36
spruce, 30 pounds.....	110	36
terra cotta, architectural voids unfilled, 72 pounds.....	110	36
voids filled, 120 pounds.....	110	36
gravel, pounds per square foot, 6.....	110	36
slag, pounds per square foot, 6.....	110	36
felt roofing, pounds per square foot, 6.....	110	36
plastering on metal laths, exclusive of furring, pounds per square foot, 8.....	111	36

*live loads:*

includes all loads except dead loads.....	111	36
permit to state purpose of building.....	111	36
floors to bear safely weight to be imposed and dead load.....	111	36
stairs to bear safely weights to be imposed and dead load.....	111	36

	Page.	Section.
<b>LOADS.</b>		
<i>live loads:</i>		
safe per square foot, uniform.....	111	36
armories, 100 pounds.....	111	36
assembly halls, 100 pounds.....	111	36
gymnasiums, 100 pounds.....	111	36
fire houses, apparatus floor, 150 pounds.....	111	36
residences, 50 pounds.....	111	36
stables, 50 pounds.....	111	36
safe per square foot:		
garages, private, two cars, 75 pounds.....	111	36
garages, public, five or more cars, 150 pounds,	111	36
grandstands, 100 pounds.....	111	36
hotels, public portion, 100 pounds.....	111	36
hotels, residence portion, 50 pounds.....	111	36
lodging houses, public portion, 100 pounds..	111	36
lodging houses, residence portion, 50 pounds.	111	36
boarding houses, public portion, 100 pounds,	111	36
boarding houses, residence portion, 50 pounds,	111	36
clubs, public portion, 100 pounds.....	111	36
clubs, residence portion, 50 pounds.....	111	36
convents, public portion, 100 pounds.....	111	36
convents, residence portion, 50 pounds.....	111	36
hospitals, public portion, 100 pounds.....	111	36
hospitals, residence portion, 50 pounds.....	111	36
asylums, public portion, 100 pounds.....	111	36
asylums, residence portion, 50 pounds.....	111	36
detention buildings, public portion, 100		
pounds.....	111	36
detention buildings, residence portion, 50		
pounds.....	111	36
manufacturing, heavy, 250 pounds.....	111	36
manufacturing, light, 125 pounds.....	111	36
office buildings, first floor, 125 pounds.....	111	36
office buildings, all other floors, 75 pounds...	111	36
public buildings, public portion, 100 pounds..	111	36
public buildings, office portion, 75 pounds...	111	36
residences, including porches, 50 pounds.....	111	36
schools, assembly halls, 100 pounds.....	111	36
schools, class rooms only, 50 pounds.....	111	36
colleges, assembly halls, 100 pounds.....	111	36
colleges, class rooms only, 50 pounds.....	111	36
sidewalks, 250 pounds.....	111	36

	Page.	Section.
<b>LOADS.</b>		
<i>live loads:</i>		
safe per square foot:		
stables, public or mercantile, street entrances		
floor, 150 pounds.....	111.	36
stables, feed room, 150 pounds.....	111	36
stables, carriage room, 50 pounds.....	111	36
stables, stall room, 50 pounds.....	111	36
stairs of armories, 100 pounds.....	111	36
corridors of armories, 100 pounds.....	111	36
fire escapes of armories, 100 pounds.....	111	36
stairs of assembly halls, 100 pounds.....	111	36
corridors of assembly halls, 100 pounds.....	111	36
fire escapes of assembly halls, 100 pounds...	111	36
stairs of gymnasiums, 100 pounds.....	111	36
corridors of gymnasiums, 100 pounds.....	111	36
fire escapes of gymnasiums, 100 pounds....	111	36
stairs, except armories, halls, gymnasiums, 75		
pounds.....	111	36
corridors, except armories, halls, gymnasiums,		
75 pounds.....	111	36
fire escapes, except armories, halls, gymna-		
siums, 75 pounds.....	111	36
storage, heavy, 250 pounds.....	111	36
storage, light, 125 pounds.....	111	36
stores, retail, 125 pounds.....	111	36
stores, wholesale, 250 pounds.....	111	36
not set out in law, commissioner may establish,	112	36
in excess of minimum values given per square		
foot, commissioner may require heavier		
design.....	112	36
on existing floors, commissioner may prescribe		
maximum load.....	112	36
occupation or use of building not to be changed		
without permit of commissioner.....	112	36
on existing floors, not to increase, without per-		
mit from commissioner.....	112	36
safe, to be posted on each floor, business build-		
ing, on metal plates by owner.....	112	36
occupants to maintain metal plates, giving safe		
load, during their occupancy.....	112	36
owner to affix metal plates, giving safe floor		
loads with each change of occupancy.....	113	36



	Page.	Section.
<b>LOADS.</b>		
<i>live loads:</i>		
no load in excess of approved posted load permitted to be placed on any floor.....	113	36
every plank, slab, arch and floor beam, carrying 100 square feet of floor or less, shall have sufficient strength to bear safely live and dead load.....	113	36
for floors, reduction of, allowed.....	113	36
<i>roofs, safe minimum:</i>		
with pitch of 4 inches or less per foot.....	114	36
with pitch of 4 inches to 8 inches per foot...	114	36
with pitch of 8 inches to 12 inches per foot..	115	36
with pitch of more than 12 inches per foot...	115	36
<i>wind pressure, on vertical surfaces on buildings:</i>		
40 feet in height, 10 pounds.....	115	36
40 feet to 80 feet, 15 pounds.....	115	36
more than 80 feet, 20 pounds.....	115	36
commissioner may require design for larger pressure.....	115	36
bracing, additional, shall be introduced when resisting moments are not sufficient to resist moment of distortion.....	115	36
<b>LOADS, FLOOR.</b>		
commissioner to prescribe maximum for existing buildings.....	112	36
<b>LOBBIES, THEATRE.</b>		
requirements for.....	159	90
<b>LOCAL BUSINESS DISTRICT.</b>		
Zoning Act, 1924, chap. 488.....	278	5
<b>LODGING HOUSES.</b>		
public, regulation for, General Laws, chap. 140..	305	33, 35
watchman, lights, gongs, etc.....	305	35
<b>LOT LINE.</b>		
first and second class buildings to be 5 feet from, if there is opening in outer wall.....	26	13
wooden buildings, used for habitation, to be not nearer than 5 feet from.....	122	40
wooden buildings, used for other than habitation to be not nearer than 5 feet from.....	123	40

## LOT LINE.

not to be moved nearer than 5 feet from any wooden building.....	122	40
exception to above, when allowed in habitation..	122	40
exception to above, when allowed in other than habitations.....	122	40
brick or concrete walls on.....	122	40
brick walls, openings in, to have metal frames and sash and wire glass.....	122	40

## M.

## MAIN REINFORCEMENTS.

in floor slabs, beams, girders columns and walls to be fire protected.....	41	15
--	----	----

## MAIN STAIRCASE.

habitations.....	128	45
------------------	-----	----

## MAINTENANCE OF BUILDINGS.

owners and lessees, responsibility of.....	189	127
--	-----	-----

## MANUFACTURING BUILDINGS.

outside limits, maximum height and area.....	77	17
outside building limits, when third-class, not to exceed 45 feet in height.....	77	17

## MARBLE, BUILDING.

stresses of.....	36	14
------------------	----	----

## MARKET BUILDINGS.

restrictions of sect. 9 apply to.....	13	9
---------------------------------------	----	---

## MARQUEES.

projecting, to be supported as required by Building Commissioner, General Laws, chap. 85...	302-303	8, 9
permit, construction of, General Laws, chap. 85..	302-303	8, 9
projecting into public way, permit for, General Laws, chap. 85.....	302	8

## MASONRY.

definition of.....	16	11
--------------------	----	----

## MASONRY, BRICK AND STONE.

not to rest on wood.....	23	13
exceptions.....	23	13

## MASSACHUSETTS, COMMONWEALTH OF.

buildings of, exempt from act.....	14	10
------------------------------------	----	----

## MASSACHUSETTS GENERAL HOSPITAL.

exempt from restrictions of chap. 333 of 1902, as amended by chap. 27 of 1923.....	268	
--	-----	--

	Page.	Section.
<b>MATERIALS.</b>		
quality of materials. . . . .	26-39	14
strength of materials. . . . .	26-39	14
materials, quality and strength of. . . . .	26-39	14
computation, methods of. . . . .	26-39	14
methods of computation. . . . .	26-39	14
commissioner may reject materials. . . . .	27	14
may require tests made. . . . .	27	14
tests to be at expense of owner. . . . .	27	14
absorption, test of. . . . .	27	14
bricks:		
component parts. . . . .	27	14
quality of. . . . .	27	14
hard, ultimate compressive strength. . . . .	27	14
absorption, test of. . . . .	27	14
wet, compressive strength of. . . . .	27	14
terra cotta floor tile:		
compressive strength of. . . . .	27	14
average strength, how computed . . . . .	27	14
terra cotta. . . . .	28	14
building blocks:		
concrete. . . . .	28	14
hollow. . . . .	28	14
definition of. . . . .	28	14
two-piece. . . . .	28	14
definition, building block shall mean. . . . .	28	14
concrete blocks:		
ultimate compressive strength. . . . .	28	14
allowable working stress of. . . . .	28	14
composition of. . . . .	28	14
hollow building blocks:		
allowable working stress of. . . . .	28	14
ultimate compressive strength. . . . .	28	14
composition of. . . . .	28	14
terra cotta building blocks, allowable working stress. . . . .	28	14
concrete aggregate:		
fine — shall consist of. . . . .	28	14
course — shall consist of. . . . .	28	14
cinders or slag may be used where. . . . .	28	14
sand for concrete:		
quality of. . . . .	29	14
tests of, commissioner may require. . . . .	29	14

	Page.	Section.
<b>MATERIALS.</b>		
stone for concrete:		
to be clean, hard and durable.....	29	14
for re-enforced concrete.....	29	14
gravel:		
run-of-bank, use of, to be approved by com- missioner.....	29	14
cinders and slag, composition of.....	29	14
slag and cinders, composition of.....	29	14
Portland cement, to conform to standard specifica- tions of American Society for Testing Materi- als.....	29	14
lime:		
not to be air slacked.....	29	14
to be free from ashes, etc.....	29	14
lime mortar, shall be made, how.....	29	14
cement lime mortar, shall be made how.....	29	14
Portland cement mortar, shall be made, how....	30	14
concrete, shall mean.....	30	14
mixing of ingredients.....	30	14
rubble concrete, shall mean.....	30	14
when one-man stones are used.....	30	14
when larger than one-man stones are used....	30	14
stones to be clean and wet.....	30	14
in piers, size of stones in.....	30	14
not allowed for any projecting footing.....	30	14
joints, how to be made, between portion of concrete.....	30	14
concrete, use of:		
manner of deposit of.....	30	14
forms — not to be removed until concrete has hardened sufficiently to carry load safely....	31	14
inspection of concrete.....	31	14
concrete, inspection of:		
inspector to be on work at all time that such material is being mixed and deposited.....	31	14
inspector to make daily reports of progress of work.....	31	14
steel, for all structural work:		
to conform to standard specifications of American Society for Testing Materials.....	31	14
wrought iron, for structural work:		
requirements for.....	31	14

	Page.	Section.
MATERIALS.		
cast-iron, for all structural work:		
requirements for.....	31	14
cast-iron columns:		
shall not be used, when.....	31	14
to be faced at ends and to give full bearing for cross section.....	31	14
hollow — requirements for.....	32	14
cast-iron bases, requirements for.....	32	14
cast-iron lintels, requirements for.....	32	14
timber, for structural purposes:		
shall be free from all defects.....	32	14
classes of — dense and sound.....	32	14
strength of materials:		
piers — defined.....	33	14
piers height of — defined.....	33	14
stresses in building materials produced by their own weight, and loads, shall not exceed limit allowed.....	33	14
for brickwork.....	34	14
for concrete.....	35	14
concrete bearing pier — plain:		
height, permissible.....	36	14
concrete bearing wall, plain — height of.....	36	14
brick bearing wall, height of — permissible.....	36	14
stresses, grout and stone masonry.....	36	14
loads may be modified when.....	36	14
for cast-iron.....	36	14
cast-iron compression members:		
value of.....	37	14
stresses due to eccentric on transverse loading combined with central loading.....	37	14
cast-iron columns:		
use of, not allowable, when.....	37	14
strength of — when core has shifted.....	37	14
cast-iron compression members:		
centrally loaded — safe load.....	37	14
stresses of timber.....	38	14
timber, stresses of.....	38	14
timber compression members.....	38	14
centrally loaded.....	38	14
other materials — stresses.....	39	14
wind bracing — provisions for required.....	39	14

## MATERIALS.

cutting for piping or other purposes — not allowed if it reduces strength of structure below legal requirements.....	39	14
methods of computation (other materials).....	39	14
computations — method of (other materials).....	39	14
span of beams — girders — trusses:		
shall be taken as.....	39	14
not covered by this act, when allowed.....	11	8
not mentioned in this act, stresses of, to be de- termined by commissioner.....	26	14
steel construction.....	66-73	16
MATERIALS, BUILDING. (See BUILDING MA- TERIALS.)		
strength of.....	26	14
stresses, tables of.....	33-38	14
MATERIALS, COMBUSTIBLE.		
not to be kept in habitable buildings.....	188	126
MAXIMUM LOAD APPROVED.		
allowable.....	112	36
MECHANICAL BUILDINGS.		
outside building limits, may be built as approved by commissioner.....	77	17
MECHANIC ARTS HIGH SCHOOL.		
height of, 1905, chap. 383.....	232-238	
MEDIUM CLAY.		
definition of.....	81	20
MERCANTILE BUILDINGS.		
basement, sprinklers in.....	21	12
MERCANTILE PURPOSES.		
first story and basement of habitations may be used for.....	75	17
METAL.		
steel construction, thickness of.....	72	16
window frames and sash.....	116	37
METAL GARAGES.		
limited size allowed, chap. 115, 1918, Special Act, regulations for, 1918 Special Act, chap. 115.....	260	1
METAL LATH AND PLASTER.		
no fire protection on steel and iron.....	100	32
METAL WORK.		
in foundations, protected from moisture.....	90	22

	Page.	Section.
METHODS.		
not covered by this act, when allowed.....	11	8
METHODS OF COMPUTATION.		
strength of building materials.....	26-39	14
MEZZANINE FLOORS.		
form a story, when.....	93	23
MINORS.		
under 16, not allowed to operate, clean or repair elevators, chap. 298, 1920.....	263	1
MIXING CONCRETE.		
how done.....	30	14
MODULUS OF ELASTICITY.		
steel for cinder concrete.....	52	15
steel for stone concrete.....	52	15
steel for concrete greater than 2,200 and less than 2,900 pounds per square inch.....	52	15
MORTAR, LIME.		
how made.....	29	14
MORTARS.		
required qualifications of.....	29, 30	14
MOVING BUILDINGS.		
prohibitions relating to.....	22	13
MOVING PICTURE HOUSES.		
special permit for, 1913, chap. 280.....	243	1
MOVING PICTURE SHOWS.		
subject to chap. 463 of 1907 and chap. 280 of 1913,	239, 243	106
MOVING PICTURES.		
exhibition of.....	243	
exhibitions, special, mayor to grant permit for, chap. 280, 1913.....	243	
MUD SILLS.		
allowed to support masonry.....	23	13
N.		
NEGATIVE BENDING.		
panel width at interior line of columns, formula...	56, 57	15
panel width at wall.....	56	15
may be increased, when.....	56	15
how provided for.....	57	15
reinforcement shall be provided, when.....	57	15
NEIGHBORING STRUCTURES.		
to be supported.....	18	12
powers of commissioner in such cases.....	18	12

	Page.	Section.
NIPPLES, SOLDERING.		
required diameter and weight of.....	179	121
NOTICE.		
on dangerous or unsafe buildings not to be re- moved.....	6	4
NUISANCE.		
a fence, when, General Laws, chap. 49.....	300	21
buildings unlawfully constructed declared to be...	192	132
NUISANCES.		
abatement and removal of, General Laws, chap. 139, sect. 3.....	304	3
NON-BEARING WALLS.		
thickness of.....	93	23
number of stories of a building.....	17	11
NONCONFORMING USE DISTRICT.		
Zoning Act, 1924, chap. 488.....	282-283	9
O.		
OAK, WHITE.		
stress of.....	38	14
OBSERVATION STANDS.		
commissioner must approve plans of.....	24	13
on roofs prohibited.....	24	13
OBSTRUCTIONS.		
in aisles, etc., of public buildings, of theatres....	166	105
OCCUPANTS.		
safety of— commissioner may order additional requirements for.....	12	8
OCCUPANTS OF BUILDINGS.		
board of health may limit number of.....	189	128
OCCUPATION.		
of buildings forbidden until egress is provided....	19	12
OCCUPATIONS OF BUILDINGS.		
not to be changed without permit from com- missioner.....	112	36
OFFICE FORCE OF DEPARTMENT.		
how appointed.....	3	1
OFFICERS, BUILDING DEPARTMENT.		
may enter buildings and premises.....	192	129
not to engage in other business.....	4	1
not to furnish materials.....	4	1



	Page.	Section.
<b>OFFICERS, BUILDING DEPARTMENT.</b>		
not to be financially interested.....	4	1
requirements and restrictions.....	4	1
to serve until removal or discharge.....	3	1
<b>OFFICERS, CITY, CERTAIN.</b>		
powers of not curtailed by this act.....	15	10
<b>OFFICES, STORES, ETC.</b>		
in theatre buildings.....	155	81
<b>ONE HUNDRED FIFTY-FIVE FOOT DISTRICT.</b>		
Zoning Act, 1924, chap. 488, yards, courts, set-back area.....	289	1
<b>OPENINGS.</b>		
of 144 square inches or less in walls and floors, approved by commissioner.....	98	31
in floors, framing of.....	46	15
in roof, framing of.....	46	15
<b>OPENINGS IN DIVISION WALL.</b>		
area and number restricted.....	17	76
<b>OPENINGS IN PARTY WALLS.</b>		
for doorways.....	98	31
<b>OPERATIVE BUILDINGS.</b>		
doors, not to be locked during working hours, General Laws, chap. 149.....	340	126
<b>OUTER COURT.</b>		
defined.....	125	42
in tenement houses, sizes, etc.....	138	58
<b>OUTSIDE FINISH.</b>		
in first and second class buildings, materials.....	20	12
<b>OUTSIDE OPENING IN WALLS.</b>		
protection of.....	116	37
<b>OVERCROWDING, TENEMENT HOUSES.</b>		
board of health may regulate to prevent.....	187	128
<b>OVERHANG.</b>		
T-beams — not to exceed, etc.....	47	15
<b>OWNER.</b>		
to protect against excavation.....	79	19
<b>OWNERS.</b>		
responsible for maintenance of buildings and structures.....	189	127

	Page.	Section.
<b>P.</b>		
PAPER STOCK, COTTON, ETC.		
not to be kept in habitable building.....	188	126
PARK COMMISSIONERS.		
not affected by this act.....	15	10
PARKWAYS.		
building lines on.....	201-205	
height of buildings, restriction of, 1905, chap. 383, order of July 21, 1905.....	236	
PARTITION WALL.		
defined.....	16	11
PARTITIONS, BEARING.		
to be fire stopped.....	102	32
PARTITIONS, COMBUSTIBLE.		
to be 4 feet from side and 6 feet from back of boiler.....	24	13
PARTITIONS, FIREPROOF.		
how to be constructed.....	104-106	33
(See FIREPROOF PARTITIONS.)		
PARTITIONS, TENEMENT HOUSE.		
construction of.....	133	50
PARTY WALLS.		
doors, in, size, etc.....	98	31
all buildings, thickness.....	92	23
in steel frame buildings, thickness.....	96	27
in wooden buildings, thickness and height above roof.....	122	40
small openings in.....	98	31
definition of.....	16	11
above roof.....	97	28
prohibition concerning.....	23	13
skeleton.....	96	27
timbers in.....	23	13
PASSAGEWAYS, PUBLIC ASSEMBLAGE.		
no temporary seats or obstructions in.....	167	105
no persons to stand in, during performance.....	167	105
PASSAGEWAYS, THEATRE.		
radiators, floor registers, etc., not to be placed in,	164	104
PENALTIES.		
for not providing watchmen, lights, gongs, etc., in hotels and lodging houses, General Laws, chap. 143, see sect. 46.....	325	53

	Page.	Section.
PENDENCY.		
notice of, filed in Registry of Deeds, General Laws, chap. 184, sect. 15.....	341	15
PENT HOUSE.		
1905, chap. 383.....	235	4
PERMIT.		
to state proposed use of building.....	111	36
PERMITS.		
fees for, authorized, chap. 571, 1910.....	241	
what work requires them.....	4, 22	1, 13
who issues.....	4	1
PERMITS AND APPLICATIONS.		
in what form.....	5	1
PERMITS, BUILDING.		
applications for.....	5	1
requirements of.....	5	1
applicants may appeal to board of appeal.....	9	7
action thereon.....	9, 10	7
Building Commissioner shall grant, for construction.....	4	1
if terms are violated commissioner may stop work.....	5	1
to be on approved printed forms.....	5	1
required for all buildings.....	18	12
PERMITS, OTHER THAN BUILDING.		
required for alterations.....	18	12
boilers, steam.....	4	1
elevators.....	119	* 38
furnaces.....	4	1
gas fitting.....	4	1
plumbing.....	173	114
commissioner to grant, on application.....	4	1
PICTURE SHOWS, MOVING.		
subject to chap. 463 of 1907, chap. 280 of 1913....	239, 243	
PIERS.		
reduced floor loads, used for.....	113, 114	36
to be of masonry or metal, when.....	20	12
to have caps and plates.....	97	30
definition of.....	33	14
height of.....	33	14
concrete, bearing, plain, height of, allowed.....	36	14
concrete to be reinforced, when.....	47	15
brick, height of, allowed.....	36	14

## PIERS AND HEARTHES.

regulations for.....	97	30
----------------------	----	----

## PILE FOUNDATION.

detached column or pier footing to rest on not less than three piles.....	84	21
may rest on single pile, when.....	84	21
light walls, may rest on single row piling, provisionally.....	84	21
at least two rows of piling required.....	84	21
may be 3 feet on centers, when.....	85	21
under masonry buildings, capping to be of block granite or concrete.....	85	21
when capped with concrete, regulations for.....	85	21
rubble concrete for capping, not allowed.....	85	21
when capped with block granite, regulation for...	85	21
may be capped with timber, when.....	85	21
additional piles required, when ordered by commissioner.....	85	21
sustaining power of piles to be determined by commissioner.....	85	21
wooden piles, regulation for.....	85	21
wooden piles, quality of.....	85	21
piles to be butt cut.....	85	21
piles to have uniform taper from butt to top....	85	21
short bends not allowed.....	85	21
all knots to be trimmed close to pile.....	86	21
all piles to be not less than 6 inches diameter at top.....	86	21
piling to be inspected by qualified inspector.....	86	21
piling inspector to keep accurate record of piles driven.....	86	21
square timber may be used, when.....	86	21
pile heads to be cut to sound wood before capped,	86	21
loads on wooden piles.....	86	21
wooden piles, shall be figured as columns, when..	86	21
such piles shall be of hardwood, oak, yellow pine, etc.....	86	21
safe load on all other wooden piles.....	86	21
when testing for value, pile head shall have sound wood.....	86	21
when testing for value, fall of hammer shall be 10 feet.....	86	21
safe supporting value of wooden, piles, formula...	87	21

	Page.	Section.
<b>PILE FOUNDATION.</b>		
wooden piles, distance between to be not less than 24 inches on centers.....	87	21
grade for cutting off piles to be five.....	87	21
may be cut at higher grade when allowed by commissioner but not to exceed grade nine....	87	21
wooden piles, depth may be driven below surface, when followers are used.....	87	21
when driving blocks are used.....	87	21
general requirements for.....	84	21
supporting value of, how obtained.....	84	21
driving method of, not to impair strength.....	84	21
frictional value, not to be relied on for support...	84	21
not to be loaded eccentrically.....	84	21
<b>PILES.</b>		
allowed for supporting masonry.....	23	13
boring may be required previously.....	82	20
commissioner to determine grade for cutting....	87	21
concrete, allowable load.....	88	21
concrete, load test.....	89	21
distance on center.....	87	21
inspector may be required.....	86	21
inspector to keep records.....	86	21
to be capped with granite or concrete.....	85	21
<b>PINE, WHITE AND YELLOW.</b>		
stress.....	38	14
<b>PIPES.</b>		
hot air, minimum distance from woodwork.....	103	32
smoke, distance from ceiling.....	103	32
steam or hot water, distance from woodwork....	24	13
wires, etc., not to be built into fireproofing of steel, etc.....	100	32
<b>PIPES, BACK AIR.</b>		
plumbing, requirements for.....	175	117
<b>PIPES, BRASS.</b>		
diameter, thickness and weight required.....	181	121
<b>PIPES, CAST-IRON.</b>		
diameter and weight required.....	181	121
<b>PIPES, DRAIN.</b>		
requirements, relating to.....	183	122
<b>PIPES, LEAD.</b>		
plumbing, restricted to short branches.....	180	121
required diameter, thickness and weight.....	180	121

	Page.	Section.
PIPES, REFRIGERATOR AND DRIP.		
plumbing, regulations for.....	177	119
PIPES, SMOKE.		
not to project through walls or windows.....	24	13
PIPES, SOIL.		
plumbing, requirements for.....	175	117
required diameters for.....	178	121
PIPES, STEAM, ETC.		
not to be within 1 inch of woodwork.....	24	13
restrictions concerning.....	24	13
PIPES, WASTE.		
plumbing, requirements for.....	174	117
required diameters for.....	178	121
PIPES, WIRES, ETC.		
not to be imbedded.....	100	32
PIPES, WROUGHT-IRON.		
diameter, thickness and weight required.....	182	121
PIPING.		
cutting for, restrictions relative to.....	24	13
distance from woodwork.....	24	13
PLACARD.		
(a) unsafe elevators, etc.....	118	*38
(b) unsafe buildings, etc.....	6	4
(c) buildings where violation of building law exists.....	6	4
(d) buildings where egress is insufficient.....	6	4
PLACING. (See SECTION 14).....	15	40
PLANS.		
including drawings, strain sheets, etc., to be filed before permit is granted.....	10	8
PLANS AND SPECIFICATIONS.		
building commissioner may require.....	4	1
duplicates to be kept at buildings.....	4	1
observation stands, commissioner must approve...	24	13
open to inspection of inspector.....	4	1
to be filed with application.....	4	1
PLASTERING.		
on fireproof partitions, thickness.....	105	33
PLUMBERS.		
must be registered or licensed.....	173	113
must get permits.....	173	114
notify commissioner on changing place of business,	173	113

	Page.	Section.
<b>PLUMBING.</b>		
“air pipes,” definition of.....	172	112
requirements for.....	173, 185	115, 123
back-water valve.....	186	124
clean-outs required diameter and weight of.....	179	121
connection with sewer or drain.....	173	122
definition of terms used in.....	172	112
“drain,” meaning of.....	172	112
drain pipes, details of construction.....	183	122
drain pipes, requirements for.....	183	122
drains, surface, must have seal trap and back water valve.....	186	124
exhausts, steam, regulations for.....	184	122
ferrules, clean-outs, etc.....	179	121
ferrules, required diameter and weight of.....	179	121
fittings, drainage, must be galvanized.....	183	121
“fixture,” definition of.....	172	112
grease and oil traps if required.....	185	123
inspection and tests of work.....	174	116
laboratory, to be approved by commissioner....	176	117
leaders, roof, requirements for.....	186	124
“leaks, repair of,” meaning of.....	172	112
municipal court given jurisdiction in law cases. . .	192	130
nipples, soldering, required diameter and weight of.....	179	121
pipes, back air, requirements for.....	175	117
brass, required diameter, thickness and weight. .	181	121
cast-iron, required diameter, thickness and weight.....	181	121
lead, required diameter, thickness and weight..	180	121
restricted to short branches.....	180	121
refrigerator and drip, regulations for.....	177, 183	119, 121
soil and waste, requirements for.....	174	117
required diameter of.....	174	121
vent, definition of.....	172	112
wrought-iron, required diameter, thickness and weight.....	182	121
° relative to business of, General Laws, chap. 142....	306-313	
roof leaders, requirements for.....	186	124
separate system, required for storm water, General Laws, chap. 83.....	302	5
soil and waste pipes, sizes required.....	178	121
soil and waste pipes, traps and fittings.....	174	117

	Page.	Section.
PLUMBING.		
“soil pipe,” definition of.....	172	112
soldering nipples, required diameter and weight of,	179	121
special traps for gasolene, naphtha, etc.....	185	123
stable drainage fixtures to be approved by commissioner.....	176	117
“surface drain,” meaning of.....	172	112
must have seal trap and back-water valve.....	186	124
terms used in, defined.....	178-183	121
tests and inspection of work.....	174	116
to be inspected and approved.....	174	116
traps, requirements for.....	176	117
special, when required.....	185	123
“vent pipes,” definition of.....	172	112
“ventilation pipe,” definition of.....	172	112
vents, requirements for.....	175	117
wash stand for vehicles, sand box for.....	186	123
waste pipes and traps, provisions for.....	174	117
water-closets, requirements for.....	178	120
water-closets, water supply for.....	178	120
“Y-branches,” definition of.....	172	112
PLUMBING, SUPERVISION OF.		
definitions:		
certificate means — (General Laws, chap. 142),	306	1
examiners, means — (General Laws, chap. 142),	306	1
journeyman means — (General Laws, chap. 142),	306	1
master plumber means — (General Laws, chap. 142).....	306	1
practical plumber means — (General Laws, chap. 142).....	307	1
registered means — (General Laws, chap. 142),	306	1
all plumbers must be licensed, General Laws, chap. 142.....	307	3
master’s license to be displayed at place of business, General Laws, chap. 142.....	307	3
examination, rules for, General Laws, chap. 142..	308	4
licenses, registration and revocation of, General Laws, chap. 142;.....	309	6
chap. 76, Acts of 1928.....	394	
fees, for licenses, examination renewals, General Laws, chap. 142.....	309	5
licenses, temporary suspension of, General Laws, chap. 142.....	309	7



	Page.	Section:
PLUMBING, SUPERVISION OF.		
inspectors, appointment and duties of, General Laws, chap. 142.....	310	11
inspectors, additional appointment of, General Laws, chap. 142.....	311	12
persons learning business of plumbing, General Laws, chap. 142.....	311	14
fees, expenditures of, General Laws, chap. 142...	311	15
penalties, General Laws, chap. 142.....	311	16
POLICE COMMISSIONER.		
not affected by this act.....	15	10
PORTABLE SCHOOL BUILDINGS.		
not affected by this act.....	14	10
PORTLAND CEMENT.		
to conform to standard specifications.....	29	14
POSITIVE BENDING.		
formula, panel width.....	56, 57	15
POSITIVE MOMENT.		
of continuous beams, subject to other than uniformed loads, may be reduced, when and how..	45	15
POWER AND HEAT.		
appliances for, in hazardous buildings.....	187, 188	125
PRIVACY IN ACCESS TO WATER-CLOSETS.		
in tenement houses.....	145	67
PRIVATE BUSINESS.		
prohibited for department employees.....	4	1
PRIVATE DWELLING.		
entertainments in. ( <i>See</i> General Laws, chap. 140, Section 182.)		
PRIVY VAULTS.		
construction and size.....	87	120
PROHIBITIONS, BUILDING.		
complete list of.....	22-26	13
relating to alterations, repairs and moving.....	22	13
PROJECTIONS.		
permits, supporting of, General Laws, chap. 85..	303	8
into public ways, General Laws, chap. 85.....	303	8
PROJECTIONS OVER PUBLIC WAYS.		
restrictions relating to.....	24	13
PROSCENIUM WALLS.		
theatre must have.....	156	83

	Page.	Section.
PROTECTION.		
in case of excavation.....	79	19
PUBLIC ASSEMBLY.		
places of, requirements, construction.....	165	105
PUBLIC BUILDINGS.		
aisles, passageways and stairways must be clear..	167	105
aisles, passageways and stairways, no person to stand in during performance.....	167	105
aisles of, must conform to requirements for theatres.....	167	107
cinematograph, use in, regulations for, General Laws, chap. 143.....	332-334	72, 83 84, 85
PUBLIC BUILDINGS.		
exits of, must conform to requirements for theatres.....	167	107
exit lights must conform to requirements for theatres.....	167	107
obstruction in aisles, etc.....	167	105
seats must conform to requirements for theatres,	167	107
seats, temporary, not allowed in aisles, etc.....	167	105
seats to be secured.....	166	105
stairways must conform to requirements for theatres.....	167	107
PUBLIC HALL.		
defined.....	125	42
PUBLIC HALLS.		
in existing tenement houses, lighting and ventilation.....	151	71
in tenement houses, lighting and ventilation.....	143	65
PUBLIC HALLS AND THEATRES.		
inspection and licensing of, 1907, chap. 463.....	239	1
PUBLIC HEALTH.		
protection of, chap. 219, 1897.....	206	1
PUBLIC HEARINGS.		
on hazardous buildings and appliances.....	187	125
PUBLIC HIGHWAY BRIDGES.		
exempt from act.....	14	10
PUBLIC HIGHWAYS.		
building lines, 1893, chap. 462.....	201-208	1

	Page.	Section.
<b>PUBLIC LODGING HOUSES.</b>		
regulations for, General Laws, chap. 140.....	305-306	33, 35 38, 40
definition of, General Laws, chap. 140.....	305	33
cubicles prohibited, General Laws, chap. 140.....	305	33
licenses for, General Laws, chap. 140.....	305	35
egress to be sufficient, General Laws, chap. 140,	305	35
fire extinguishing appliance required, General		
Laws, chap. 140.....	305	35
fire alarm appliances required, General Laws,		
chap. 140.....	305	35
free access to, for inspector, required, General		
Laws, chap. 140.....	306	38
penalty, General Laws, chap. 140.....	306	40
<b>PUBLIC PARK BUILDINGS.</b>		
1889, chap. 129.....	201	1
<b>PUBLIC PARKS.</b>		
buildings in, chap. 129, 1889.....	201	1
<b>PUBLIC SAFETY.</b>		
excavations, commissioner may take necessary		
measures.....	18	12
power of, relating to.....	6, 7	4, 5
<b>PUBLIC SERVICE CORPORATIONS.</b>		
May appeal on zoning to Department of Public		
Utilities, chap. 70, Acts of 1928.....	394	
<b>PUBLIC SCHOOLS.</b>		
use of, for social circle and other uses, chap. 86,		
1916, Special Acts.....	259	1
Use of, for social, civic and other purposes, 1916		
Special Act, chap. 86.....	259	1
<b>PUBLIC WAYS.</b>		
boilers not to be placed under.....	23	13
building line on, General Laws, chap. 82, Section		
37.....	301	1
signs and structures encroaching on, General		
Laws, chap. 85.....	302	8, 9
<b>PUBLIC WAYS AND SQUARES.</b>		
projection over, regulation for.....	24	13
<b>PUBLICATION.</b>		
of records of violations, privileged.....	5	2

	Page.	Section.
PUNCHING.		
punching shear not to exceed six per cent of compression strength.....	52	15
PUNCHING SHEAR IN FOOTINGS.		
area effective to resist in column footings.....	53	15
Q.		
QUALITY.		
materials — in general.....	26	14
brick.....	27	14
sand.....	29	14
stone.....	29	14
gravel.....	29	14
cinders and slag.....	29	14
lime.....	29	14
lime mortar.....	29	14
Portland cement.....	29	14
cement lime mortar.....	29	14
Portland cement mortar.....	30	14
QUAYS, WHARVES, ETC.		
not affected by this act.....	14	10
R.		
RADIATORS.		
theatre, forbidden in passageways.....	164	104
RAGS, FEATHERS, ETC.		
not to be kept in habitable buildings.....	188	126
RAILROAD STATIONS.		
not affected by this act.....	14	10
RAILWAY BRIDGES.		
exempt from act.....	14	10
RAISING OF BUILDINGS.		
examination to be made on application to raise...	6	3
RANGE BOILER.		
to have capacity mark thereon before sold, General Laws, chap. 142.....	312	17
makers' guaranteed test to be stamped on, General Laws, chap. 142.....	312	18
penalty of violations of Sections 17 and 18, General Laws, chap. 142.....	313	19
exceptions to Sections 17, 18, 19, General Laws, chap. 142.....	313	20

	Page.	Section.
<b>RANGE BOILER.</b>		
making, sale and installation of, General Laws, chap. 142.....	312	17
<b>RAT PROOFING.....</b>		
cellars to be made rat proof, when.....	90	22
method of.....	90	22
<b>REAL PROPERTY.</b>		
writs affecting title, filing of, General Laws, chap. 184.....	341	15
<b>RECESS, OR CHASE.</b>		
requirements relating to.....	23	13
<b>RECORD OF UNSAFE BUILDINGS.....</b>		
<b>RECORD OF VIOLATIONS.....</b>		
<b>RECORDS OF DEPARTMENT.</b>		
open to public inspection.....	4	1
<b>RECTANGULAR BEAMS.</b>		
formulas.....	60-63	15
<b>REGISTER BOXES.</b>		
to be set in soapstone, etc.....	103	32
construction of.....	103	32
hot-air pipes, to be 1 inch from woodwork.....	103	32
to be 1 inch from woodwork.....	103	32
size of, allowed.....	103	32
connecting pipes.....	103	32
<b>REGISTER BOXES OR PIPES.</b>		
distance from woodwork.....	103	32
how made and protected.....	103	32
minimum size.....	103	32
<b>REGISTRATION OF PLUMBERS.....</b>		
<b>REGISTRY OF DEEDS.</b>		
notice of pendency in, General Laws, chap. 184..	341	15
<b>REINFORCED CONCRETE.....</b>		
frame for walls.....	96	27
definition:		
reinforced concrete shall mean.....	39	15
reinforced concrete, definition of.....	39	15
reinforcements of, specification for.....	39	15
Portland cement and aggregate:		
required quality.....	39	15
reinforcements, of steel (reinforced concrete) speci- fications for.....	39	15

	Page.	Section.
<b>REINFORCED CONCRETE.</b>		
reinforced concrete:		
mixing of ingredients, consistency of.....	40	15
inspection of.....	40	15
forms.....	40	15
placing.....	40	15
columns, to be poured, how.....	40	15
walls to be poured, how.....	40	15
columns, of same type, concrete mix to be in same proportion.....	40	15
structural slabs, how poured.....	40	15
stopping of work, to be at points of low shear .	40	15
temperature, high and low.....	40	15
premature drying to be prevented.....	40	15
concrete, not to be desposited, below freezing point,	40	15
fire protection, of main reinforcement in floor slabs,	41	15
in beams, girders, columns and walls.....	41	15
rust protection, of steel in foundations and retain- ing walls.....	41	15
reinforcement, spacing of.....	41	15
design, basis for, calculations shall be made, how,	41	15
basis for design:		
assumption <i>a</i> — plane section before bending, remains plane.....	41	15
assumption <i>b</i> — modulus of elasticity of con- crete in compression.....	41	15
assumption <i>c</i> — tensile strength of concrete. . .	41	15
assumption <i>d</i> — under compressive stress, two materials stressed in proportion to modulus of elasticity.....	41	15
assumption <i>e</i> — initial stress, neglected when...	41	15
span length:		
for beams and slabs simply supported.....	42	15
when continuous or restrained, built mono- lithically into supports.....	41	15
brackets, and their relation to clear span.....	41	15
maximum negative moments, when to be con- sidered as existing.....	41	15
bending:		
bending moments for uniformly distributed dead and live loads in beams and slabs, reinforced in one direction only.....	41	15

	Page.	Section.
<b>REINFORCED CONCRETE.</b>		
bending:		
shall be computed on following assumptions:		
(a) for single span freely supported. . . . .	41	15
(b) for single span restrained at ends. . . . .	41	15
(c) for two equal continuous spans freely supported. . . . .	41	15
(d) for two equal continuous spans restrained at support. . . . .	41, 43	15
(e) for three or more equal continuous spans freely supported. . . . .	43	15
(f) for three or more equal continuous spans restrained at support. . . . .	43	15
(g) at restrained ends of continuous beams. . . . .	43	15
beams and slabs, shall be considered as restrained, when. . . . .	43	15
continuous beams, positive bending moment. . . . .	45	15
beams, parallel to main reinforcement, etc., design for bending moments. . . . .	45	15
spans of unusual or unequal length. . . . .	45	15
slabs, supported on four sides, formula for. . . . .	46	15
reinforcements in slabs, bending moments, calculated moments. . . . .	46	15
beams, load determined how. . . . .	46	15
floor and roof openings, framing of, not to exceed allowable stresses. . . . .	46	15
depth, in roof slabs. . . . .	46	15
in T-beams below slab. . . . .	46	15
cinder-concrete slabs, thickness span. . . . .	46	15
self-centring, prohibited, when. . . . .	47	15
reinforcement, fireproofing under. . . . .	47	15
bending in supporting members:		
beam or floor slab. . . . .	47	15
T-beams, when bond and shearing resistance between slab and web of beam is provided. . . . .	47	15
columns or piers of concrete:		
shall be reinforced, when. . . . .	47	15
height permissible. . . . .	47	15
columns, maximum effective area of. . . . .	47	15
exterior columns, reinforcement of. . . . .	48	15

	Page.	Section.
<b>REINFORCED CONCRETE BUILDINGS.</b>		
framing of.....	48	15
brackets, provided to transmit load from floors to columns, shall be computed as follows:		
(a) when placed immediately below floor.....	48	15
(b) when placed immediately above floor.....	48	15
circular hollow columns:		
steel or wrought-iron, filled with concrete, loading capacity.....	48	15
columns, with longitudinal reinforcement only... with longitudinal reinforcement.....	49	15
49	15	
combination floors, to conform to requirements of law so far as applicable.....	49	15
blocks or forms shall not be assumed as taking stress.....	49	15
working stresses.....	50	15
allowable stresses.....	50	15
concrete one year old, compressive strength... bearing, when 35 per cent compressive strength shall be allowed:	50	15
axial compression.....	51	15
concentric compression on columns.....	51	15
bending, compression on extreme fiber in bending, shear and diagonal tension.....	51	15
beams with horizontal basis only.....	51	15
with web reinforcement.....	51	15
punching, shear.....	52	15
bond, stress between concrete and steel bars.....	52	15
steel, tensile or compressive stress.....	52	15
concrete, modulus of elasticity of.....	52	15
footing, general, symmetrical concentric columns: footings shall be designed for punching shear, diagonal tension and bending moment.....	53	15
punching shear in footings.....	53	15
diagonal tension in footings.....	53	15
bending moment in footings.....	53	15
flat slabs:		
capitals, requirements.....	54	15
dropped panels, requirements.....	54	15
slab thickness, requirements.....	54	15
bending, in flat slab floors.....	55	15
panel width, A, and B, strips.....	55	15
interior bays.....	55	15



	Page.	Section.
<b>REINFORCED CONCRETE BUILDINGS.</b>		
flat slabs:		
positive bending.....	56	15
negative bending.....	56	15
walls, bays, restraint.....	56	15
positive bending.....	56	15
negative bending.....	56	15
walls, bays, no restraint.....	57	15
positive bending.....	57	15
negative bending.....	57	15
bays, when treated as wall bays.....	57	15
bending floors, one half above and below slab....	58	15
for roofs, below slab.....	58	15
brackets, necessary on exterior columns, when....	58	15
interior columns, concrete, least dimension of..	58	15
reinforcement of strips.....	58	15
bent bars, reinforcement.....	58	15
concrete, stress in.....	59	15
wall beams, in flat slab construction.....	59	15
when continuous, negative bending.....	59	15
positive bending at mid span.....	59	15
brick walls, flat slab supported by brick wall....	59	15
reinforced concrete construction, formulas.....	59	15
1. Standard notation:		
(a) rectangular beams.....	60	15
(b) T-beams.....	60	15
(c) beams, reinforced for compression..	60	15
(d) shear, bond and web reinforcement.	60	15
(e) columns.....	61	15
2. Formulas:		
(a) rectangular beams.....	61	15
Fig. 1. Fibre stresses.....	62	15
steel ratio, for balanced rein-		
forcement.....	62	15
(b) T-beams.....	62	15
Fig. 2. Case I., when neutral axis		
lies in the flange.....	62	15
Case II., when neutral axis		
lies in the stem.....	62	15
formulas which neglect compres-		
sion in stem.....	62, 63	15
formulas for rectangular beams,		
approximate results.....	63	15

	Page.	Section.
<b>REINFORCED CONCRETE BUILDINGS.</b>		
reinforced concrete construction:		
2. Formulas:		
(c) beams reinforced for compression...	64	15
Fig. 3. Position of neutral axis...	64	15
position of neutral com-		
pression.....	64	15
arm of resisting couple....	64	15
fibre stresses.....	64	15
(d) shear, bond and web reinforcement..	65	15
stresses in web reinforcement,		
formulas.....	65	15
vertical web reinforcement.....	65	15
bars bent up, horizontal and web		
members inclined.....	65	15
T-beams.....	66	15
(e) columns:		
total safe load.....	66	15
unit stresses.....	66	15
may be of supported structural steel or cast-iron		
columns.....	48	15
said support to be fireproofed.....	48	15
<b>REINFORCED CONCRETE WALLS.....</b>	<b>94</b>	<b>23</b>
<b>REINFORCEMENT.</b>		
spacing of, slab reinforcement bars, in tension....	41	15
spacing of beams.....	41	15
spacing of girders.....	41	15
self-centring, fireproofing under.....	47	15
strips, quantity necessary.....	58	15
when lying obliquely to axis of strip.....	58	15
<b>REINFORCEMENT SLABS.</b>		
supported on four sides, distribution of.....	46	15
<b>REINFORCEMENTS, MAIN.</b>		
fire protection of, beams, columns, walls, girders .	41	15
<b>REINFORCEMENTS, STEEL.</b>		
requirements for.....	39	15
to be free of mill scale and loose rust.....	39	15
<b>REINFORCING MATERIALS, SELF-CEN-</b>		
<b>TRING.</b>		
use of, prohibited where span exceeds 8 feet. ....	47	15
<b>REJECTION OF MATERIAL.</b>		
power of commissioner.....	40	15

	Page.	Section.
REMODELLED.		
what buildings may be.....	107	35
REMOVAL OF BUILDINGS.		
'permit for.....	4	1
REMOVAL WORK.		
to be supported.....	18	12
REPAIRING OF BUILDINGS.		
examination to be made on application.....	6	3
"REPAIR OF LEAKS."		
plumbing, meaning of.....	172	112
REPAIR OF WOODEN BUILDINGS.		
within limits, permit required.....	22	13
REPAIRS.		
defined.....	125	42
limit of cost, to be called such.....	22	13
REPAIRS AND ALTERATIONS.		
permits required for.....	18, 22	12, 13
REPEALS.		
chap. 419, 1892, and all acts inconsistent, repealed,	193	133
REPORT. (Annual.)		
board of appeal to Mayor.....	11	8
to be printed separately.....	12	8
of commissioner.....	4	1
REQUIREMENTS.		
for all buildings.....	18-22	12
RESPONSIBILITY FOR MAINTENANCE.		
of owners and lessees.....	189	127
RESTRICTION.		
of areas.....	75-76	17
RESTRICTIONS.		
tenement-house, commissioner not to dispense with.....	153	76
RETAINING WALLS.		
for excavation.....	79	19
rust protection.....	41	15
RIVET HOLES.		
steel construction in tension members.....	71	16
RIVETED JOINTS.		
rules for.....	70	16
when to be used.....	96	27

	Page.	Section.
RIVETING.		
of steel columns.....	96	27
of steel frame.....	96	27
to be used, when and how.....	69, 70, 71, 72	16
RIVETS.		
steel construction.....	69, 70, 71, 72	16
ROOF.		
fire stopping of.....	102	32
ROOF GARDENS.		
above theatres, provisions for.....	167	109
exits required for.....	167	109
ROOF HOUSES.		
1905, chap. 383.....	235	4
ROOF LEADERS.		
requirements for.....	186	124
ROOF LOAD.		
minimum.....	114	36
ROOF OPENINGS.		
framing of.....	46	15
ROOF SLABS.		
depth.....	45	15
ROOFING.		
to be brick, tile, slate, etc.....	25	13
of wooden shingles not permitted.....	25	13
ROOFS.		
not to discharge on street or alley.....	23	13
observation stands, not be erected on.....	23	13
permanent means of access to.....	18	12
safe minimum live load with pitch of 4 inches or less per foot.....	114	36
with pitch of 4 inches to 8 inches per foot.....	114	36
with pitch of 8 inches to 12 inches per foot.....	115	36
with pitch more than 12 inches per foot.....	115	36
egress to.....	18	12
discharge of snow, etc., from.....	23	13
observation stands on, prohibited.....	23	13
ROOMS, TENEMENT HOUSE.		
lighting and ventilation of.....	142	63
size of, regulations for.....	142	64
ROT.		
timbers to be free from.....	32	14

Page. Section.

## RUBBLE CONCRETE.

meaning of.....	30	14
not to be used for any projecting footing.....	30	14

## RUST PROTECTION.

foundations and retaining walls.....	41	15
--------------------------------------	----	----

## RUTHERFORD AVENUE.

buildings on, height of, chap. 416, 1907.....	238	1
---	-----	---

## S.

## SAFETY OF OCCUPANTS.

commissioner may order additional requirements for.....	12	8
--	----	---

## SALARIES.

Building Commissioner.....	3	1
members of appeal board.....	8	6

## SAND.

when used for concrete, quality of, strength of....	29	14
compact, definition of.....	81	20
loose, definition of.....	81	20
fine-grained, definition of.....	81	20
compact, maximum allowable, bearing value in foundations.....	80	20
dry or wet, coarse, maximum allowable bearing value in foundations.....	80	20
fine-grained, wet, maximum allowable bearing value in foundations.....	80	20

## SANDSTONE.

stresses of.....	36	14
------------------	----	----

## SANITARY BUILDINGS.

of wood, chap. 4, 1873.....	200	1
-----------------------------	-----	---

## SCHOOL BUILDINGS.

permanent or portable, exempt from provisions of this act, except as provided in sect. 17.....	14	10
---	----	----

## SCHOOLS.

public, use for social purposes, etc., 1916, Special Act, chap. 86.....	259	1
--	-----	---

## SCUTTLES.

in roof, where required.....	18, 127	12, 44
------------------------------	---------	--------

## SCUTTLES AND BULKHEADS.

tenement house, requirements for.....	127	44
---------------------------------------	-----	----

## SEALING OF STANDPIPES.

on stage of theatres forbidden.....	165, 171	104, 111
-------------------------------------	----------	----------

	Page.	Section.
SEATS, ASSEMBLY ROOMS.		
must conform to law for theatres when ordered by Building Commissioner.....	167	107
SEATS, PUBLIC BUILDINGS.		
must conform to requirements for theatres.....	167	107
SEATS, THEATRE.		
arrangement and space for.....	158	87
SECOND-CLASS BUILDINGS.....		
defined.....	74, 76	17
what buildings to be.....	16	11
foundations.....	74	17
to be fire stopped.....	80-83	20
tenement houses to be sprinklered, when, and how,	102, 103	32
	129	45
SECOND-CLASS CONSTRUCTION.		
buildings may be of.....	74	17
new, adapted for habitation:		
height of not to exceed five stories or 60 feet ....	74	17
area of such buildings not to exceed 5,000 square feet.....	74	17
basements of such buildings, or first story, or both, may be used for mercantile purposes, when.....	75	17
area, restriction of, when and how.....	76	17
area not to exceed 10,000 square feet.....	76	17
SELF-CENTRING.		
reinforcing materials, use of, prohibited, when....	47	15
reinforcement, fireproofing under.....	47	15
SEPARATE HALL.		
in tenement houses.....	143	65
SETTING OF BOILERS AND FURNACES.		
permit for.....	4	1
"SHAFT."		
definition of.....	125	42
SHAFT ENCLOSURE.		
fireproof, how supported.....	76	17
in first and second class warehouses and stores to have fireproof enclosures.....	75, 76	17
to be of fireproof material.....	116	* 38
SHAFTS, ELEVATOR.		
tenement house, regulations for.....	133	52

	Page.	Section.
<b>SHAFTWAYS.</b>		
elevator, to be enclosed, 1914, chap. 782.....	245	6
light, to be enclosed, 1914, chap. 782.....	245	6
ventilators, to be enclosed, 1914, chap. 782.....	245	6
<b>SHAKES.</b>		
timber to be free from.....	32	14
<b>SHALE.</b>		
definition of.....	81	20
maximum allowable bearing value in foundations,	80	20
<b>SHEAR AND DIAGONAL TENSION.</b>		
for beams with horizontal bars only, with and		
without reinforcement.....	51	15
for beams with web reinforcement.....	51	15
<b>SHEAR PUNCHING.</b>		
not to exceed six per cent of compression strength,	52	15
<b>SHEET PILING.</b>		
where used.....	79	19
<b>SHINGLE ROOFS.</b>		
not permitted. ....	25	13
<b>SHIRLEY-EUSTIS MANSION.</b>		
exempt from building law provisions, until Jan-		
uary 1, 1918, Special Act of 1915, chap. 306....	248	1
<b>SHUTTERS.</b>		
on what buildings, how constructed and where		
placed.....	116	37
provision and requirement for.....	116	37
<b>SIGNS.</b>		
projection allowed.....	24	13
permits, etc., General Laws, chap. 85, sect. 8....	302	8
projecting into public ways, permit for, etc., Gen-		
eral Laws, chap. 85.....	302	8
<b>SIGNS AND STRUCTURES.</b>		
encroaching on public ways, General Laws, chap.		
85, sect. 8.....	302	8
<b>SINGLE DWELLING.</b>		
may be converted into three families.....	14	9
<b>SINGLE RESIDENCE DISTRICT.</b>		
Zoning Act, 1924, chap. 288.....	276	3
<b>SINKS IN EXISTING TENEMENT HOUSES.</b>		
woodwork to be removed.....	152	73
<b>SIXTY-FIVE FOOT DISTRICT.</b>		
Zoning Act, 1924, chap. 488.		
yards, courts, set back area.....	287	13

	Page.	Section.
<b>SKELETON CONSTRUCTION.</b>		
method.....	96	27
<b>SKYLIGHT.</b>		
not allowed over court in tenement house.....	138	57
over elevator shafts.....	116	* 38
over stair hall in existing tenement house.....	151	71
over stair hall in tenement house.....	144	66
over vent shafts in tenement houses.....	133	52
tenement house, regulations for.....	151	71
<b>SLAB THICKNESS.</b>		
in flat slab construction.....	54	15
shear about column, capital, or dropped panel. . .	54	15
<b>SLABS.</b>		
to be considered restrained at ends, when.....	45	15
supported on four sides, distribution of loads.....	46	15
reinforcement of, bending moment, calculated moment.....	46	15
simply supported, span length.....	41	15
depth below T-beams.....	40	15
concrete cinder, thickness of, span of.....	46	15
continuous or restrained span length.....	42	15
considered integral part of beam, when.....	47	15
cast monolithic, a T-section, when.....	50	15
<b>SLAG.</b>		
allowable for aggregate, when.....	28	14
composition of, allowable.....	29	14
<b>SMOKE PIPES.</b>		
at least 1 foot below ceiling.....	103	32
not to project through wall or window.....	24	13
regulations for.....	103-104	32
relative to.....	103-104	32
not to be placed nearer than 1 foot to woodwork, to have metal collars when passed through floors or partitions not fireproof.....	103	32
entering chimney to have metal collar.....	104	32
passing through roof or external wall prohibited..	104	32
when within 18 inches of ceiling to have wire lath and plaster protection or shields.....	104	32
<b>SNOW ON ROOFS.</b>		
discharge of.....	23	13
<b>SOFT CLAY.</b>		
definition of.....	81	20



	Page.	Section.
SOIL.		
character and depth, to be determined by test..	82	20
"SOIL PIPE."		
plumbing, definition of.....	172	112
SOIL AND WASTE PIPES AND TRAPS.		
plumbing requirements for.....	174	117
SOLDERING NIPPLES.		
required diameter and weight of.....	179	121
SOLID LEDGE.		
definition of.....	81	20
SOUND.		
definition of, classes of timber.....	32	14
SOUTH BAY.		
harbor lines, 1921, chap. 137.....	265	1
no wharf, pier, wall, filling or other structure to extend beyond harbor lines, 1921, chap. 137....	267	2
no structure, filling or other work allowed below present high water mark, 1921, chap. 137.....	267	3
all previous harbor lines annulled, 1921, chap. 137,	267	4
SPACING OF REINFORCEMENT.		
slab reinforcement bars in tension.....	41	15
beams and girders.....	41	15
SPAN LENGTH.		
for beams and slabs simply supported.....	42	15
for beams and slabs, continuous or restrained....	42	15
brackets, when used.....	42	15
maximum negative moments.....	42	15
SPAN OF A BEAM.		
defined.....	42	15
SPANS.		
unusual or unequal length to be designed to carry out intent of act.....	35	15
SPECIFICATIONS AND PLANS.		
commissioner may require.....	4	1
duplicate to be kept at building.....	4	1
observation stands, commissioner must approve..	24	13
SPIKE FENCE.		
not to exceed 6 feet in height, General Laws, chap. 49.....	300	21
SPRINKLERS.		
automatic, commissioner may order, in basements of mercantile buildings hereafter erected.....	21	12
if installed, larger undivided area allowed.....	76	17

	Page.	Section.
SPRINKLERS AND STANDPIPES.		
theatres, regulation for.....	165	104
SPRINKLERS IN TENEMENT HOUSES.		
hereafter erected, second and third class.....	129	45
first-class buildings.....	130	45
existing, basement.....	130	45
may be waived, when.....	130	45
SPRUCE.		
stress of.....	38	14
STABLES.		
distance from adjoining buildings.....	25	13
outside limits, maximum height and area.....	77	17
public hearings for.....	25	13
restrictions relating to location of.....	25	13
fire protection in, for horses and mules, General Laws, chap. 272.....	341	86
outside building limits, may be built as approved by commissioner.....	77	17
exits, runways, sprinklers, occupancy above first floor prohibited when, General Laws, chap. 272.....	341	86
STABLES, DRAINAGE OF.		
fixtures to be approved by commissioner.....	177	117
STAGE DOORS.		
theatre, requirements for.....	159	91
STAGING OR STANDS FOR OBSERVATION.		
not to be erected on roofs.....	23	13
STAIR HALL.		
defined.....	125	42
in tenement houses, construction.....	131	46, 47
STAIR SHAFTS.		
in first-class stores and warehouses, to be fire- proof, automatic doors.....	75	17
STAIR STRINGERS.		
to be fire stopped.....	102	32
STAIRS.		
constructed to carry loads safely.....	111	36
in tenement houses, dimensions.....	128, 129	45
fireproof, to roof bulkhead.....	127	44
minimum load for.....	111	39
to roof to be kept clear.....	127	44
STAIRS AND PUBLIC HALLS.		
tenement houses to have lights, when.....	130	45

	Page.	Section.
STAIRS, THEATRE.		
how to be constructed.....	163, 164,	100, 103
STAIRWAY ENCLOSURES.		
in tenement houses to be sprinklered, when and how.....	129	45
STAIRWAYS.		
in tenement houses.....	128, 129	45
STAIRWAYS, PUBLIC BUILDINGS.		
must conform to requirements for theatres.....	167	107
persons not allowed to stand on, during perform- ance.....	167	105
STANDPIPES.		
chap. 278 of 1923.....	269	
STANDPIPES AND SPRINKLERS.		
theatre, regulations for.....	165	104
STANDS, OBSERVATION.		
commissioner must approve plans of.....	24	13
not to be erected on roofs.....	23	13
STATE BUILDINGS.		
not affected by this act.....	14	10
STATE FIRE MARSHAL.		
appeal from decision of chap. 320, Acts of 1928....	397	
STATE HOUSE VICINITY, OF.		
height of building (70 feet), 1899, chap. 457.....	222	1
height of buildings (100 feet-70 feet), 1902, chap. 543.....	223	1
STATIONS, RAILROAD.		
not affected by this act.....	14	10
STEAM EXHAUSTS.		
regulations pertaining to.....	185	122
steam generator, commissioner may prescribe conditions for maintenance.....	188	125
STEAM PIPES.		
to be not less than 1 inch from woodwork.....	24	13
STEEL.		
fireproofing of.....	98-100	32
in foundations, protected.....	90	22
need not be fireproofed where wood could be used, reinforcements, requirements for.....	101	32
tensile and compressive stress.....	39	15
exceptions, in slabs of stone concrete.....	41	15
exceptions, in slabs of stone concrete.....	52	15
exceptions in drawn wire, etc.....	52	15

	Page.	Section.
<b>STEEL AND IRON.</b>		
in alteration work to be fireproofed as required by commissioner. . . . .	101	32
<b>STEEL COLUMNS.</b>		
parts to be riveted. . . . .	96	27
hollow, circular, filled with concrete load allowance,	48	15
<b>STEEL CONSTRUCTION.</b>		
materials, stresses and methods of computation. (See sect. 14). . . . .	66-73	16
general requirements. . . . .	66-73	16
thickness of metal, allowable. . . . .	69	16
rivets. . . . .	66-73	16
tension members, proportioning. . . . .	66	16
net sections to be used. . . . .	66-68	16
<b>STEEL FRAME.</b>		
to be riveted. . . . .	96	27
<b>STEEL FRAME CONSTRUCTION.</b>		
may be used for garages. . . . .	380	
methods. . . . .	96	27
<b>STEEL GRILLAGE.</b>		
in foundations, requirements for. . . . .	83	20
<b>STEEL, MODULUS OF ELASTICITY.</b>		
for cinder concrete. . . . .	52	15
for stone concrete. . . . .	52	15
for steel concrete over 2,200 pounds and less than 2,900 pounds per square inch. . . . .	52	15
2,900 pounds or over per square inch. . . . .	53	15
<b>STEEL, STRUCTURAL.</b>		
to conform to standard specifications. . . . .	31	14
<b>STIRRUP IRONS.</b>		
when and where required. . . . .	20	14
<b>STONE.</b>		
when used for concrete, quality of. . . . .	29	14
when used for reinforced concrete, quality of. . . . .	29	14
<b>STONE MASONRY.</b>		
stresses for. . . . .	36	14
<b>STOP ORDER.</b>		
how issued. . . . .	5	1
<b>STOPPING WORK.</b>		
concrete work to stop at point of low shear. . . . .	40	15

	Page.	Section.
STORAGE BUILDINGS.		
outside limits, maximum height and areas. . . . .	77	17
outside building limits may be built as approved by commissioner. . . . .	77	17
STORE FRONTS.		
how protected. . . . .	20	12
outside finish of. . . . .	20	12
STORES.		
first-class, to have fireproof shafts and automatic doors. . . . .	75	17
STORES AND STORAGE BUILDINGS.		
fire escape, requirements for. . . . .	77	17
STORES, OFFICES, ETC.		
in theatre buildings. . . . .	155	81
STORM WATER.		
separate system of plumbing required for, General Laws, chap. 83. . . . .	302	5
"STORY," BUILDING.		
definition of. . . . .	17	11
STRAIN SHEETS.		
to be filed before permit is granted. . . . .	10	8
STRAINS.		
calculation of, to be submitted. . . . .	10	8
STRAW, HAY, FEED, ETC.		
not to be kept in habitable building. . . . .	188	126
STREET COMMISSIONERS.		
not affected by this act. . . . .	15	10
STREET, PUBLIC.		
boilers under, prohibited. . . . .	24	13
STREET WIDTH.		
how measured. . . . .	77	18
STRENGTH.		
of materials. . . . .	26-39	14
STRENGTH, STABILITY SAFETY.		
of a building, commissioner may order additional requirements for. . . . .	12	8
STRESS.		
tensile or compressive, of steel. . . . .	52	15
exceptions, slabs of stone concrete and drawn wire,	52	15

	Page.	Section.
STRESSES.		
working not to be altered. . . . .	11	8
timber compression members due to eccentric loading. . . . .	38	14
timber compression members, due to transverse loading. . . . .	38	14
of materials, not set out in law, to be determined by commissioner. . . . .	39	14
of materials used in construction. . . . .	39	14
of brickwork used in construction. . . . .	34	14
of concrete used in construction. . . . .	35	14
of grout and stone masonry. . . . .	36	14
of structural cast iron. . . . .	36	14
of timber. . . . .	36	14
not prescribed to be fixed by commissioner. . . . .	39	14
STRESSES BUILDING MATERIALS.		
tables, etc. . . . .	26-39	14
STRESSES, STEEL CONSTRUCTION. . . . .		
	39-66	15
STRING COURSES.		
projection allowed. . . . .	24	13
STRUCTURAL DETAILS.		
to be submitted. . . . .	10	8
STRUCTURAL IRON.		
stresses for. . . . .	36, 37	14
STRUCTURAL METAL.		
to be fireproofed and how. . . . .	99-101	32
to be fire protected. . . . .	99-101	32
method of same. . . . .	99-101	32
exemptions. . . . .	101	32
STRUCTURAL SLABS.		
to be poured full thickness. . . . .	40	15
STRUCTURAL STEEL.		
to conform to standard specifications. . . . .	31	14
specifications for design, fabrications and erection,	66	16
1. Allowable Stresses.		
(a) tension, rolled steel, on net section,	66	16
(b) compression, rolled steel, on short lengths. . . . .	66	16
(c) bending, on extreme fibres of rolled shapes. . . . .	67	16
built up sections, etc. . . . .	67	16
when unsupported length $l$ exceeds 15 times $b$ , the width of compression, flange. . . . .	67	16

	Page.	Section.
<b>STRUCTURAL STEEL.</b>		
1. Allowable Stresses.		
( <i>d</i> ) shearing.....	67-68	16
( <i>e</i> ) bearing.....	68	16
( <i>f</i> ) combined stresses.....	68	16
( <i>g</i> ) members carrying wind only.....	68	16
2. Symmetrical Members.....	68	16
3. Beams and girders.....	69	16
( <i>a</i> ) rolled beams.....	69	16
( <i>b</i> ) plate girder webs.....	69	16
( <i>c</i> ) web splices.....	69	16
( <i>d</i> ) stiffeners.....	69	16
( <i>e</i> ) flange plates.....	69	16
( <i>f</i> ) crane runway girders.....	69	16
( <i>g</i> ) rivets.....	69	16
( <i>h</i> ) rivets.....	70	16
4. Column bases:		
( <i>a</i> ) distribution of column loads on footings and foundations.....	70	16
( <i>b</i> ) top surface of column bases to be planed.....	70	16
( <i>c</i> ) column bases, to be set true and level and secured to footings.....	70	16
5. Eccentric loading.....	70	16
6. Combined stresses.		
( <i>a</i> ) members subject to direct and bending stresses.....	70	16
( <i>b</i> ) when members are subject to stresses of tension and compression.....	70	16
7. Abutting joints.....	70	16
8. Net sections.		
( <i>a</i> ) calculation of tension members.....	71	16
( <i>b</i> ) pin connected tension members.....	71	16
9. Rivets and bolts.		
( <i>a</i> ) nominal diameters to be used, when..	71	16
( <i>b</i> ) rivets carrying calculated stresses....	71	16
( <i>c</i> ) rivets shall be used for connections subject to reversal of stresses.....	71	16
( <i>d</i> ) finished bolts in reamed holes.....	71	16
finished shank.....	71	16
washers under nuts.....	71	16
unfinished bolts may be used, when,	71	16
10. Rivet spacing.....	71	16

	Page.	Section.
<b>STRUCTURAL STEEL.</b>		
11. Connections.		
(a) carrying calculated stresses.....	72	16
(b) members meeting at a joint.....	72	16
(c) rivets, pins.....	72	16
(d) when a beam or girder acts as a continuous or fixed end beam.....	72	16
(e) where stress is transmitted from one pin to another.....	72	16
12. Expansion.....	72	16
13. Minimum thickness.....	72	16
14. Workmanship.		
(a) to be equal to best practice.....	73	16
(b) compression joints, bearing surfaces of, to be truly faced.....	73	16
(c) burning torch, use of restricted.....	73	16
15. Erection.		
(a) steel skeleton.....	73	16
(b) work to be securely bolted.....	73	16
(c) stresses to be taken care of, which piles of material, etc., are carried during erection.....	73	16
(d) riveting to be done only after struc- ture has been properly aligned.....	73	16
(e) rivets to be heated and driven with care.....	73	16
<b>STRUCTURES, TEMPORARY.</b>		
commissioner may prescribe conditions for.....	13	9
<b>STUDDING.</b>		
not to be placed nearer than 1 inch to chimney..	23	13
to be fire stopped.....	102	32
<b>SUBSTITUTE MATERIALS.....</b>	11	8
<b>SUBSTITUTE METHODS.</b>		
plans, formulas, etc., to be filed with commissioner,	10	8
<b>SUMMER THEATRES.</b>		
outside building limits, how may be constructed, capacity.....	167	110
<b>SUPPORT BY CITY, FOR DANGEROUS EXCAVATIONS.</b>		
cost may be recovered.....	79	19
<b>SUPPORT WORK.</b>		
and adjoining property.....	18	12



	Page.	Section.
SUPPORTING MEMBERS.		
bending in beams or floors slab proportioned to resist stresses, when.....	47	15
SUPPORTING WORK.		
power of commissioner.....	18	12
SUPPORTS.		
below first floor, to be of masonry or metal.....	20	12
"SURFACE DRAIN."		
must have deep seal trap and back-water valve..	186	124
plumbing, terms defined.....	172	112
SURVEY OF LOT.		
required.....	5	1
SUSPENDED CEILING.		
of metal lath and plaster, fireproofing of, same as for slabs.....	50	15
SYSTEMS.		
not covered by this act, when allowed.....	11	8
T.		
TABLES, STRESSES.		
showing strength of building materials.....	26-39	14
T-BEAMS.		
depth below slab.....	50	15
when slab may be considered an integral part of beam.....	47	15
its effective width not to exceed, etc.....	47	15
its overhang not to exceed, etc.....	47	15
TEARING DOWN.		
permit for.....	4	1
TEMPERATURE.		
high, premature drying must be avoided.....	40	15
low, freezing must be avoided.....	40	15
TEMPORARY FLOORS.		
during construction.....	124	41
TEMPORARY SEATS.		
in public buildings prohibited.....	167	105
in theatres prohibited.....	170	111
TEMPORARY STRUCTURES.		
commissioner to prescribe conditions for.....	13	9
in connection with other work, commissioner to fix conditions.....	13	9
when permitted.....	13	9

	Page.	Section.
<b>TENEMENT HOUSE.</b>		
yard, width of.....	135	55
yard, depth of.....	135	55
separate hall.....	143	65
<b>TENEMENT-HOUSE REQUIREMENTS.</b>		
commissioner not to dispense with.....	153	76
<b>TENEMENT HOUSES.</b>		
"apartment," definition of.....	125	42
ashes, receptacles for.....	153	75
bakeries and fat boiling, in, prohibited.....	134	53
basements' shafts to be inclosed.....	130	45
basement rooms, when exempt from strict compliance with this act.....	147	68
basements, requirements for.....	145-148	68
bulkheads, construction of.....	127	44
cellar ceilings, construction of.....	132	49
"corner lot," definition of.....	124	42
"courts," definition of.....	125	42
general regulations for courts.....	138	57
inner, regulations for.....	140	59
outer, regulations for.....	138-139	58
vent, regulations for.....	140	60
dangerous business in, regulated.....	134	54
defined.....	124	42
definition of certain words.....	124, 125	42
drainage of courts and yards.....	153	74
egress, provision for, in case of fire.....	125	43
elevator shafts, regulations for.....	133	52
elevators in basement of, if more than eight suites and three stories in height to be inclosed in fireproof material.....	130	45
entrance halls, construction of.....	132	48
existing, lighting and ventilation of.....	150	70
fire escapes, construction of.....	125-127	43
in what they shall consist.....	125-127	43
general regulations for.....	125-127	43
internal and external.....	125-127	43
garbage, receptacles for.....	153	75
hallways in, required to be lighted all night, if more than eight suites and three stories in height.....	130	45
hereafter erected to have fire escapes.....	125	43

	Page.	Section.
TENEMENT HOUSES.		
intakes, provision for.....	141	61
light and ventilation, provisions for.....	135-137	55
lighting, board of health may regulate.....	189	128
lights in hallways, stairways, elevators, etc., to be left lighted all night, if more than eight suites and three stories in height.....	130	45
not to be enlarged to decrease size of yard.....	141	62
other buildings, on same lot.....	141	62
outside limits, restrictions.....	133	51
overcrowding, board of health may prevent.. . . .	189	128
partitions, construction of.....	133	50
"public hall" definition of.....	125	42
"repairs," definition of.....	125	42
rooms of, lighting and ventilation.....	142	63
size of.....	142	64
size of yard, minimum.....	141	62
scuttles, construction of.....	127	44
"shaft," definition of.....	125	42
skylights, regulations for.....	151	71
sprinklers in, required, when more than ten suites and three stories in height.....	129	45
stair hall, definition of.....	125	42
stairway, halls, construction of.....	131	46
stairs and public halls.....	129	45
stairways in basement of, if more than eight suites and three stories in height, to be inclosed in fire- proof material.....	130	45
to have bulkhead or scuttle.....	127	44
ventilation, board of health may regulate.....	189	128
water-closets, requirements for.....	148, 152	69, 72
water supply, regulations for.....	152	73
windows in public halls of.....	143	65
for stair halls.....	144	66
wooden, limit of height and area.....	133	51
"yard," definition of.....	124	42
yards, requirements and regulations for.....	135, 137	55, 56
where not required.....	137	56
hereafter erected, sprinklers required when and how.....	129	45
sprinklers required in, when and how.....	129	45
existing, sprinklers required, when.....	130	45
existing, sprinklers waived, when.....	130	45

	Page.	Section.
<b>TENEMENT HOUSES.</b>		
basements, to be sprinklered in first-class buildings.....	129	45
basements in second and third class, hereafter erected to be sprinklered.....	130	45
basements in second and third class, existing, to be sprinklered.....	130	45
kitchenettes to be sprinklered, when.....	129	45
elevator shafts to be sprinklered, when.....	129	45
stairway enclosures to be sprinklered when.....	129	45
light shafts to be sprinklered, when.....	129	45
dumb-waiter shafts to be sprinklered, when.....	129	45
rear stairway doors in, to be fireproofed, when... ..	130	45
<b>TENSION, SHEAR AND DIAGONAL.</b>		
for beams with horizontal bars only, with and without web reinforcement.....	51	15
<b>TERMS USED IN PLUMBING.</b>		
meaning of, defined.....	172	112
<b>TERRA COTTA.</b>		
floor tile, average compression strength of.....	27	14
how computed.....	27	14
building blocks, crushing strength.....	28	14
building blocks, working stress of.....	28	14
<b>TERRA COTTA PARTITION BLOCKS.</b>		
thickness of blocks.....	105	33
<b>TESTS.</b>		
of substitute methods and materials to be made satisfactory to commissioner.....	11	8
loading, commissioner may order at expense of, owner.....	12	8
how determined in exceptional cases.....	12	8
fire, method of determining.....	12	8
of materials, commissioner may require of owner, .....	26	14
<b>TESTS, ELEVATOR.</b>		
manufacturers must make.....	120	* 38
<b>TESTS, PLUMBING.</b>		
work must be approved.....	174	116
<b>TEST, SOIL.</b>		
to determine character and depth.....	82	20
of fireproof partitions, method to be employed....	106	33
<b>THEATRE EXITS.</b>		
general regulations for.....	159, 161	91, 99
	169, 170	111

	Page.	Section.
THEATRES.		
aisles, regulations for.....	158	88
aisles, passageways, etc., persons not to remain in during performance.....	170	111
are light in auditorium in existing theatres.....	170	111
art galleries above, regulations for.....	167	108
auditoriums, heating apparatus under.....	165	104
balcony and gallery platforms for seats, size.....	158	87
boilers, engines and heating apparatus under theatres.....	165, 169	104, 111
control of exits, lights, etc.....	162, 169	99, 111
courts and passages, size, etc.....	154	79
curtains, must have fireproof.....	156	84
doors to open outward.....	159	93
existing, if altered, to conform to new law.....	154	77
existing regulations for exits.....	170	111
exit passages.....	154	79
exit plans on program.....	162	99
exit signs.....	162, 170	99, 111
exits, location, width, etc.....	159	91, 92
	160	95, 96
	102, 170	99, 111
exits to be marked by signs, etc.....	162	99
false doors and mirrors not allowed.....	160	94
fire escapes, outside to be lighted.....	162, 170	99, 111
fireproof construction required.....	154	78
floor and stage, levels of.....	155	82
floor levels, changes by inclines.....	158	89
foyers, lobbies, corridors, passages, capacity re- quired.....	159	90
gas outlets, number, to be inspected and tested...	162	99
gas pipe outlets required.....	162	99
gates in stage standpipes.....	165, 171	104, 111
handrails, stair, requirements for.....	164	102
heating apparatus under theatres.....	165, 169	104, 111
inspection, gas pipe outlets, required.....	162	99
landings, stair, required dimensions of.....	163	101
lighting fixtures over auditorium, protected from falling.....	157	86
lighting, independently fed on governed system in auditorium, halls, etc.....	162, 169	99, 111
lights for exits, etc.....	162, 169	99, 111
lobbies, requirements for.....	159	90

## THEATRES.

obstructions or people in aisles or stairways.....	170	111
open courts required.....	154, 155	79, 80
opening outward of doors.....	159, 170	93, 111
plans on program.....	162, 170	99, 111
proscenium wall, construction and openings.....	156	83
proscenium walls required.....	156	83
curtains required.....	156	84
public buildings must conform to requirements for,	167	107
radiators forbidden in passageways of.....	164	104
roof gardens may be above.....	167	108
room exits for employees.....	159	92
seats in auditorium, requirements for.....	158	87
skylight over stage.....	157	86
sprinklers, automatic, required.....	165	104
stage doors must be provided.....	159	91
stage floor, construction.....	156	85
stairs, construction dimensions, handrails, etc....	163, 167	100, 108
stairs, how to be constructed.....	163	100
standpipes required.....	165	104
stores, offices, etc., under.....	155	81
temporary seats not allowed.....	170	111
"theatre," definition of.....	154	77
to be fireproof construction except certain por-		
tions.....	154	78
ventilators, requirements for.....	157	86
licensing of, 1907, chap. 463.....	239	1
THEATRES AND PUBLIC HALLS.		
inspection and licensing of, 1907, chap. 463, sect. 1,	239	1
THEATRES, CONSTRUCTION OF.		
to be first-class.....	154	78
THEATRES, EXISTING.		
general regulations for.....	169, 172	111
THEATRES, SUMMER.		
outside building limits, how may be constructed,	167	110
THICKNESS OF WALLS.		
defined.....	16	11
for all buildings.....	91, 92	23
in steel frame buildings.....	96	27
when ashlar included.....	93	23
THIRD-CLASS BUILDINGS.		
definition of.....	16	11
may be altered or enlarged, when and how.....	14	9

	Page.	Section.
<b>THIRD-CLASS BUILDINGS.</b>		
size and location of window on area.....	109	35
tenement houses to be sprinklered, when and how, fire-stopping.....	129	45
	103	32
<b>THIRD-CLASS CONSTRUCTION.</b>		
(See, also, Wooden Buildings.)		
buildings may be third-class, when.....	74	17
<b>THIRTY-FIVE FEET DISTRICT.</b>		
Zoning Act, 1924, chap. 488.		
yards, courts, set back, area.....	285	11
<b>TIES.</b>		
steel beams in direction of length.....	96	27
<b>TIMBER.</b>		
compression numbers, centrally loaded, safe load per square inch.....	38	14
for structural use, to conform to specifications promulgated by commissioner.....	32	14
to be free from all shakes, knots, rot, worm holes and defects.....	32	14
dense, definition of.....	32	14
sound, definition of.....	32	14
stresses of.....	38	14
compression members, regulation for use of.....	38	14
compression members, eccentric loading of.....	38	14
compression members, transverse loading of.....	38	14
compression members, centrally loaded, safe load,	38	14
<b>TIMBERS.</b>		
in walls, how to be treated (second-class build- ings).....	106	34
in party wall.....	23	13
<b>TIMBERS IN WALLS, SECOND-CLASS BUILDINGS.</b>		
to enter wall 4 inches.....	106	34
to be splayed, shaped or arranged so as to fall out in case of fire without injury to wall.....	106	34
<b>TORN DOWN.</b>		
buildings may be, by Health Commissioner, when, 1897, chap. 219.....	206	1
<b>TOWN.</b>		
includes city, General Laws, chap. 4.....	299	7
<b>TRAPS, EARTHENWARE.....</b>	175	117
<b>TRAPS, PLUMBING.</b>		
requirements for.....	174-176	117

	Page.	Section.
TRAPS, SPECIAL.		
grease, inflammable compounds, non-siphon . . . . .	186	123
TRIMMER.		
arches . . . . .	97	30
TRIMMERS, WOODEN.		
hung in stirrup irons, when . . . . .	20	12
TRUSSES.		
computation, method of, for span of . . . . .	39	14
TRUSSES, RIVETED.		
center of gravity line . . . . .	72	16
need not be fireproofed, when . . . . .	101	32
TWO-FAMILY DWELLING.		
may be converted into three-family dwelling, when . . . . .	14	9
U.		
UNDERPINNING FOR WOODEN BUILD- INGS.		
materials and thickness . . . . .	120	39
UNRESTRICTED DISTRICTS.		
Zoning Act, 1924, chap. 488 . . . . .	282	8
UNSAFE BUILDING.		
record of . . . . .	6	3
UNSAFE BUILDINGS.		
commissioner may order vacated . . . . .	6	4
commissioner to post notices on . . . . .	6	4
commissioner may take down or shore up . . . . .	7	5
owner to take down or secure . . . . .	7	5
may be placarded . . . . .	6	4
UNSUITABLE MATERIAL.		
commissioner has power to reject . . . . .	27	14
USE OF BUILDINGS.		
not to be changed without permit . . . . .	112	36
U. S. GOVERNMENT BUILDINGS.		
exempt from act . . . . .	14	10
V.		
VACANCIES.		
in board of appeal, how filled . . . . .	8	6
VACATE BUILDINGS.		
commissioner may order vacated:		
(a) when unsafe or dangerous . . . . .	7	4
(b) where violation exists . . . . .	7	4
(c) where egress is insufficient . . . . .	7	4



	Page.	Section.
VACATED.		
building to be, when ordered by commissioner with approval of Mayor.....	7	4
buildings may be, by Health Commissioner when, 1897, chap. 219.....	206	1
VALVES.		
of stage standpipes in theatres.....	165, 171	104, 111
VAULTED WALLS.		
regulations for.....	95	26
VENT COURT.		
defined.....	125	42
VENT COURTS.		
for tenement houses, size, etc.....	140	60
VENT PIPE. ( <i>See</i> Smoke Pipe).....	103	32
"VENT PIPES."		
plumbing, definition of.....	172	112
regulation for.....	103	32
VENT SHAFTS.		
defined.....	125	42
of fireproof material.....	116	38
in tenement houses to have intakes and skylights,	133	52
VENTILATING FLUES.		
must be of incombustible material.....	21	12
to stoves, broilers or heaters to be of brick.....	21	12
"VENTILATION PIPE."		
plumbing, definition of.....	172	112
VENTILATION, TENEMENT HOUSE.		
board of health may regulate.....	189	128
VENTILATORS, THEATRE.		
requirements for.....	157	86
VENTS.		
plumbing, requirements for.....	175	117
VIOLATIONS OF BUILDING LAWS.		
to be recorded.....	5	2
VIOLATIONS OF PERMIT.		
action to be taken.....	5	1
VIOLATORS OF BUILDING LAWS.		
may be fined \$500.....	192	132
VOTING BOOTHS.		
not affected by this act.....	15	10

	Page.	Section.
W.		
WALL BAYS.		
restraint, when wall is of reinforced concrete.....	56	15
no restraint.....	57	15
WALL BEAMS.		
flat slab construction, in.....	59	15
when continuous, negative bending at columns...	59	15
when continuous, positive bending at mid span...	59	15
width of columns, formulas (a) and (b).....	59	15
WALLS.		
framed with iron or steel.....	96	27
proscenium, theatres must have.....	156	83
outside finish of.....	20	12
8 inches thick to be corbelled for joists.....	106	34
floor loads reduced in figuring.....	114	36
if steel frame, how constructed.....	96	27
in steel frame buildings, thickness.....	96	27
party, above roof, height and finish.....	97	28
not to be removed to enlarge floor areas over limit.....	76	17
small openings in.....	98	31
outside openings in, to be protected.....	116	37
to be bonded at angles.....	94	24
to restrict areas.....	75	17
foundations to be 4 inches thicker than walls overhead.....	93	23
when reinforced, by frame of steel or reinforced concrete.....	93	23
ashlar, when included in the thickness of.....	93	23
non-bearing thickness of, height of.....	93	23
curtain, thickness of, height of.....	94	23
hollow block, not to be used for bearing walls....	94	23
solid, reinforced concrete ( <i>see</i> sect. 15).....	94	23
brick, bonding of.....	95	25
mezzanine floor or balcony more than 10 feet in span shall be considered as a story in fixing thickness of walls supporting it.....	93	23
ashlar, not to be considered unless walls are 16 inches thick and ashlar 8 inches thick.....	93	23
also unless alternate courses are 4 inches and 8 inches to allow bonding with backing.....	93	23

	Page.	Section.
<b>WALLS.</b>		
non-bearing, may be 4 inches less in thickness, when.....	93	23
non-bearing, may be 8 inches less in thickness supporting stairs or stair landings.....	93	23
non-bearing, not to be less than 8 inches in thickness.....	93	23
non-bearing, not to exceed a height of 30 times its thickness.....	93	23
curtain, in single family dwelling.....	94	23
curtain, in all other buildings.....	94	23
curtain, not to exceed in height, 30 times its thickness when more than 20 feet in length....	94	23
hollow block, not to be used for bearing walls, when, hollow block, relative to.....	94	23
basement, what it includes.....	91	23
thickness of, shall be sufficient to keep stresses within requirements of working stresses pre- scribed by this act.....	91	23
for single family dwellings, not over three stories, with wooden floor beams spanning not over 15 feet.....	91	23
floor timbers in, ends of, not to be nearer than 8 inches to each other.....	91	23
for dwellings, not over three stories, when floor spans more than 20 feet.....	91	23
when any part of such building is adapted for other than habitation, surrounding walls of such part to be not less than 12 inches in thickness.....	91	23
when one part of building is lower than the rest..	93	23
foundation, to be 4 inches thicker than wall of first story.....	93	23
main reinforcement to be fire protected.....	41	15
<b>WALLS ABOVE ROOF, PARTY.</b>		
requirements for.....	97	28
<b>WALLS, CONCRETE.</b>		
how poured, when to be poured.....	40	15
<b>WALLS, CORNICES.</b>		
regulations for.....	97	29
<b>WALLS, CURTAINS.</b>		
party and outside, must have.....	96	27

	Page.	Section.
WALLS, PARALLEL.		
to be properly tied.....	20	12
"WALLS, PARTITIONS."		
definition of.....	16	11
"WALLS, PARTY."		
definition of.....	16	11
must have curtain.....	96	27
openings for doorways in.....	98	31
wooden buildings to have, when.....	122	40
"WALLS, THICKNESS OF."		
meaning of, defined.....	16	11
for basement.....	91	23
for single dwelling.....	91	23
for other dwellings.....	91	23
for hotels.....	92	23
for lodging houses.....	92	23
for boarding houses.....	92	23
for club houses.....	92	23
for convents.....	92	23
for hospitals.....	92	23
for asylums.....	92	23
for detention buildings.....	92	23
for all other buildings.....	95	23
WALLS, VAULTED.		
regulations for.....	95	26
WASHINGTON STREET.		
corner Lovering place, exempt from height of buildings, Act, 1914, chap. 786.....	246	1
WASTE PIPES AND TRAPS.		
plumbing requirements for.....	174	117
WATCHMAN.		
in hotels, etc., when required, General Laws, chap. 143.....	323	44
WATER-CLOSETS.		
number required.....	19	12
requirements for.....	148	69
	178, 190	120, 128
tenement house, provisions for.....	145, 148	67, 69
ventilation of.....	19	12
in existing tenement houses, number and ventila- tion.....	152	72
in existing tenement houses, woodwork to be removed.....	152	72

	Page.	Section.
<b>WATER-CLOSETS.</b>		
in tenement houses, access to .....	145	67
in tenement house cellar, permit from Health Commissioner.....	149	69
in tenement houses, floors to be waterproofed . . .	149	69
in tenement houses, number, lighting, ventilation,	149	69
number, in buildings where persons are employed,	19	12
number, in habitations.....	19	12
separate for men and women.....	19	12
water supply for.....	178	120
<b>WATER PIPES.</b>		
protection from frost.....	19	12
<b>WATER SUPPLY.</b>		
tenement house, requirements for.....	152	73
<b>WATERPROOFING CELLARS.</b>		
when required.....	90	22
<b>WHARVES AND BUILDINGS THEREON.</b>		
not restricted by building limits.....	13	9
not subject to building laws.....	13	10
<b>WHARVES, ETC.</b>		
restrictions of, sect. 9 not to apply to.....	13	9
<b>WHARVES, QUAYS, ETC.</b>		
not affected by this act.....	14	10
<b>WHEEL GUARDS.</b>		
on columns.....	101	32
<b>WIDTH.</b>		
effective, of T-beams, not to exceed, etc. ....	47	15
<b>WIDTH OF STREET.</b>		
how measured.....	77	18
when uneven, 1905, chap. 383, order of July 21, 1905.....	236	
meaning of 1905, chap. 383, order of July 21, 1905,	236	
when buildings on one side of street only, 1905, chap. 383, order of July 21, 1905.....	236	
<b>WIND BRACING.</b>		
provisions for, required.....	39	14
<b>WIND PRESSURE.</b>		
on vertical surfaces, on buildings 40 feet in height, 10 pounds.....	115	36
40 feet to 80 feet in height, 15 pounds.....	115	36
more than 80 feet in height, 20 pounds.....	115	36

	Page.	Section.
<b>WIND PRESSURE.</b>		
commissioner may require a design for increased pressure when in his judgment the exposure requires it.....	115	36
bracing, additional, may be required, when.....	115	36
<b>WINDERS ON STAIRS.</b>		
width.....	129	45
<b>WINDOW CAPS AND SILLS.</b>		
projection allowed.....	24	13
<b>WINDOWS.</b>		
habitable buildings, regulations for.....	109	35
in first and second class mercantile and manufacturing buildings within 20 feet of opposite wall to have metal frames and wire glass.....	116	37
in existing tenement houses.....	150	70
in living rooms of habitations, distance from opposite wall.....	109	35
size.....	109	35
tenement house, in public halls.....	143	65
for stair halls.....	144	66
third-class buildings exempt. (Exceptions).....	109	35
openings on fire escapes.....	21	12
<b>WINDOWS IN ELEVATOR SHAFTS.</b>		
to have red iron bars.....	117	* 38
<b>WINDOWS IN TENEMENT HOUSES.</b>		
basement rooms.....	145	68
courts, exception.....	141	61
public halls.....	143	65
size and locations.....	142	63
of water-closets, bathrooms, halls on court, minimum size.....	139	58
<b>WIRE GLASS.</b>		
in automatic doors, stair shafts.....	75, 76	17
<b>WIRES, COMMISSIONER OF.</b>		
not affected by this act.....	15	10
provisions of sect. 7 apply to.....	10	7
<b>WOOD.</b>		
in foundation of wooden buildings on marshy land,	23	13
<b>WOOD CONSTRUCTION.</b>		
allowed under masonry, when.....	23	13

	Page.	Section.
WOODEN BUILDINGS. ( <i>See, also, Third-class Buildings.</i> )		
allowed within building limits, for:		
(a) building on wharves not exceeding 27 feet in height. . . . .	13	9
(b) elevators for grain or coal. . . . .	13	9
(c) temporary structures to facilitate building operations. . . . .	13	9
(d) dwellings for one and two families under certain restrictions. . . . .	13	9
construction of, general regulations for. . . . .	120-121, 122-124	39, 40
description of frame. . . . .	121	39
for sanitary purposes, chap. 4, 1873. . . . .	200	1
foundations for. . . . .	120	39
habitations, distance from lot line and next buildings. . . . .	122	40
habitations, maximum height, number of stories, height of, requirements. . . . .	122	40
not habitations, distance from lot line. . . . .	123	40
proximity to other buildings. . . . .	122	40
regulations concerning. . . . .	120, 122	39, 40
tenement houses, limit of size and area. . . . .	133	51
when to have brick party walls. . . . .	122	40
within limits, not to be enlarged. . . . .	22, 117	13, 35
may be altered or enlarged, when and how. . . . .	14	9
foundation, requirement for. . . . .	120	39
foundation, to be of brick, stone, granite, concrete or rubble. . . . .	120	39
within limits, alteration and repair of. . . . .	22	13
within limits, moving of. . . . .	22	13
foundation, to be carried to surface of ground. . . . .	120	39
foundation, of brick or concrete, to be 12 inches thick. . . . .	120	39
foundation, of granite, to be 18 inches thick. . . . .	120	39
foundation, of rubble, to be 20 inches thick. . . . .	121	39
foundation, to be laid at least 4 feet below surface exposed to frost. . . . .	121	39
foundation, to be laid on solid ground or upon piles properly spaced. . . . .	121	39
foundation, no round or boulder stone permitted in. . . . .	120	39
underpinning, to be of brick or concrete, 12 inches thick, or of stone 16 inches. . . . .	121	39

	Page.	Section.
<b>WOODEN BUILDINGS.</b>		
ledger boards.....	121	39
studding, not over 20 inches on centers.....	121	39
solid corners.....	121	39
post to be secured, braced.....	121	39
ledger board, space back of, to be filled.....	121	39
to be securely nailed, framed or ironed together,	121	39
ledger boards, when not allowed.....	121	39
in limits, prohibited.....	22	13
fireproofing.....	101	32
sanitary purposes, 1873, chap. 4.....	200	1
<b>WOODEN HEADERS.</b>		
requirements for.....	20	12
<b>WOODEN TRIMMERS.</b>		
requirements for.....	20	12
<b>WORK.</b>		
requiring permit.....	18, 22	12, 13
<b>WORKING STRESSES.</b>		
not to be modified.....	11	8
compressive strength, basis for design.....	50	15
table for same.....	50	15
concrete shall not be used, when.....	50	15
concrete, one year old, compressive strength of,	50	15
<b>WORMHOLES.</b>		
timber to be free from.....	32	14
<b>WROUGHT IRON.</b>		
strength of.....	31	14
to conform to standard specifications.....	31	14
<b>WROUGHT-IRON COLUMNS.</b>		
circular, filled with concrete, load allowance.....	48	15
<b>Y.</b>		
<b>"Y-BRANCHES."</b>		
plumbing, definition of.....	172	112
<b>YARD.</b>		
for tenement house, not to be decreased, when...	141	62
size, etc.....	135	55
to be drained.....	153	74
definition of.....	124	42
<b>YARDS, TENEMENT HOUSE.</b>		
general regulation for.....	135, 137	55, 56
when not required.....	137	56



## Z.

## ZONING ACT, 1924, CHAPTER 488.

<i>Definitions.</i> Building, area of.....	274	1
area of building.....	274	1
dwelling.....	274	1
hotel.....	274	1
lot.....	275	1
setback.....	275	1
story, half.....	275	1
half-story.....	275	1
yard rear.....	275	1
rear yard.....	275	1
yard, side.....	275	1
side yard.....	275	1
accessory use.....	276	3
limitations of.....	277	3
Single residence district.....	276	3
General residence district.....	277	4
Local business district.....	278	5
General business district.....	279	6
Industrial district.....	280	7
Unrestricted district.....	282	8
Nonconforming uses.....	282-283	9
Bulk — Districts:		
establishment of.....	284	10
thirty-five feet in height.....	285	11
forty feet in height.....	286	12
sixty-five feet in height.....	287	13
eighty feet in height.....	288	14
one hundred and fifty-five feet in height.....	289	15
regulations, height and area.....	289-291	15
exceptions height and area.....	289-291	15
Districts — Boundaries of.....	292	17
Boundaries of districts.....	292	17
Enforcement.....	292	18
Permits.....	292	18
Appeals.....	293	19
Public Service Corporations may appeal to Department of Public Utilities, chapter 70, Acts of 1928.....	394	
Board of Zoning Adjustment.....	294	20
Zoning Adjustment Board.....	294	20

	Page.	Section.
ZONING ACT, 1924, CHAPTER 488.		
Jurisdiction.....	297	21
Penalties.....	297	21
Interpretation and application of Act.....	297	22
Application and interpretation of Act.....	297	22
Existing buildings.....	298	23
Permit.....	298	23
Validity of Act.....	299	24
Act when effective.....	299	25
Buildings permissible to be <i>erected, altered or used</i> :		
single residence districts.....	276	3
general residence districts.....	277	4
local business districts.....	278	5
general business districts.....	279	6
all buildings not specified as, prohibited.....	279	6
industrial districts.....	280	7
all buildings not specified as, prohibited.....	280	7
unrestricted districts.....	282	8
all buildings not prohibited by law, ordinance or regulation.....	282	8
Yards, courts, setbacks, areas. ( <i>See also chap.</i> <i>200 Acts, 1927</i> ).....	382	
Rear yards required.        ) For 35-foot district	285	11
Side yards required.       ) For 40-foot district	286	12
Courts required.           ) For 65-foot district	287	13
Setbacks required.         ) For 80-foot district	288	14
Building area restriction.) For 155-foot district	289	15
Height of buildings, exceptions and regulations...	289	16
Area of buildings, exceptions and regulations.....	290-291	16
Boundaries of district.....	292	17
Districts — Boundaries of.....	292	17
Permit, enforcement.....	292	18

## SUPPLEMENTARY INDEX.

LEGISLATIVE ACTS OF THE YEARS  
1927, 1928 and 1929.

	Page
ACTS OF 1927.	
Chap. 42 — Metal Covered Steel Frame Buildings.....	380
Chap. 82 — Licenses for Operators of Motion Pictures.....	382
Chap. 220 — Zoning Law, amendments to.....	382
Chap. 246 — Back Bay District, restrictions in.....	390
Chap. 342 — Beacon Street, yard spaces in.....	392
ACTS OF 1928.	
Chap. 70 — Zoning Law, amendment to.....	394
Chap. 76 — Plumbers' Licenses.....	394
Chap. 137 — Height of Buildings.....	396
Chap. 260 — Garages, permit for.....	397
Chap. 320 — State Fire Marshal, appeal from decisions of....	397
Chap. 325 — Fire Prevention, amendments to Act relating to..	398
ACTS OF 1929.	
Chap. 88 — Zoning Act, amendment to.....	402
Chap. 338 — Height of Buildings on Saint James Avenue.....	403

THE UNIVERSITY OF CHICAGO

OFFICE OF THE DEAN

CHICAGO, ILL.

DEAR SIR:

I have your letter of the 10th inst.

relative to the application of

Mr. [Name] for admission to the

graduate course in [Field].

The committee on the subject

has met and has reported that

they are in favor of his

admission to the course.

I am, therefore, pleased to

inform you that he has been

admitted to the course.

Very respectfully,

[Signature]

Dean







